

HYPRO® • SHURFLO®
PUMPS, SPRAY TIPS & ACCESSORIES
PRODUCT CATALOG

Table of Contents

Pumps and Engines	1-110
Selecting the Right Pump	2-8
Centrifugal Pumps	9-51
Life Guard Silicon Carbide Pump Seals.....	49
Self-Priming Adaptor (SPA)	50
Centrifugal Pump Accessories.....	51
Transfer Pumps	52-57
Roller Pumps.....	58-68
Roller Pump Kits & Accessories.....	66-67
Other Pump Accessories	68
Diaphragm Pumps.....	69-84
Diaphragm Pump Accessories, Kits and Control Units	81-84
SHURflo Pumps	85-99
SHURflo Diaphragm Pumps.....	85-94
SHURflo Diaphragm Pump Accessories and Fittings.....	95-96
SHURflo Mini-Bulk Chemical Transfer Systems and Accessories	97-99
Piston / Plunger Pumps and Hydraulically-Driven Pressure Washers.....	100-103
Specialty Pumps (Versa-Twin, Noryl, Hydraulic-Driven Gear Pump and Aqua-Tiger).....	104-108
Pump Cutaways	109
PowerPro Gasoline Engines.....	110
Spray Tips	111-183
Selecting the Right Spray Tip	112-115
Broadcast Spray Tips.....	116-139
Broadcast Wide-Angle Spray Tips.....	140-145
Streaming Spray Tips	146-151
Banding and Directed Spray Tips	152-165
Specialty Spray Tips	166-173
Caps, Filters and Training Tools.....	174-175
Technical Information – Spray Tips	176-183
Accessories	184-230
Nozzle Bodies-DuoReact, ProFlo, Express End Caps and Fittings, ProStop.....	184-190
Nozzle Body Accessories, Boom Clamps and Foam Marker	191-193
ProCap Tank Lids	194-196
ProClean and Tank Accessories	197
Cleanload Chemical Eductor, Poly or Stainless Steel Eductor	198-199
Line Strainers.....	200-201
Spray Guns.....	202-204
Flowmeters.....	205
Sprayer Control Valves	206-209
Ball Valves	210-211
Gauges	211-213
Universal Flange Clamps, Gaskets and Fittings.....	214-215
Hose Barb with Fly Nut Fittings and Cam Locks	216-217
Fittings.....	218-229
Cable ties, Hose Clamps and Sealant.....	230
Index.....	231-244
Limited Warranty on Hypro/SHURflo Pumps and Other Hypro Products	245

Pumps and Engines

Centrifugal Pumps..... Page 9

- Commonly used with self-propelled sprayers, large-trailed sprayers, and construction equipment
 - Material Options: Cast Iron, Polypropylene, 316 Stainless Steel
 - Pressure Range: 0-150 psi (0- 10 bar)
 - Flow Range: 0-1078 gpm (0-4080 lpm)

Transfer Pumps Page 52

- Commonly used with tender trailers and fluid transfer stations
 - Material Options: Polypropylene, Aluminum, Cast Iron
 - Pressure Range: 0-55 psi (0- 3.8 bar)
 - Flow Range: 0-460 gpm (0-1740 lpm)

Roller Pumps Page 58

- Commonly used with 3-point sprayers, pest control, and de-icing skids
 - Material Options: Cast Iron, Ni-Resist, Silver Series XL
 - Pressure Range: 0-300 psi (0- 20 bar)
 - Flow Range: 0-60 gpm (0-227 lpm)

Diaphragm Pumps Page 69

- Commonly used with nutrient application systems, fruit & vegetable sprayers, and pressure cleaning system
 - Material Options: Aluminum, Brass, Polypropylene
 - Pressure Range: 0-725 psi (0- 50 bar)
 - Flow Range: 0-66 gpm (0-250 lpm)

SHURflo Diaphragm Pumps Page 85

- Commonly used with ATV sprayers and nutrient application systems
 - Material Options: Cast Iron, Polypropylene, 316 Stainless Steel
 - Pressure Range: 0-150 psi (0- 10 bar)
 - Flow Range: 0-5 gpm (0-19 lpm)

Piston & Plunger Pumps..... Page 100

- Commonly used with pressure-cleaning systems
 - Material Options: Cast Iron, Polypropylene, 316 Stainless Steel
 - Pressure Range: 0-1000 psi (0- 69 bar)
 - Flow Range: 0-10 gpm (0-38 lpm)

Specialty Pumps Page 104

- Versa-Twin: transferring liquids in carpet cleaning, pest control, and turf spraying
- Noryl: bulk transfer of fertilizer and agricultural chemicals
- Aqua-Tiger: general pumping applications where a flooded intake is provided

PowerPro Engines Page 110

Selecting the Right Pump

Because the pump is the “heart of the liquid system” on equipment, careful consideration must be made in selecting the right pump. Seldom is there only one pump that will do the job. To make a wise choice, you will need to know about pump types, how the pump is driven, and the flow and pressure requirements for your specific spraying system and application.

1. Pump Types

To ensure you can closely match the pump to your needs, Pentair manufactures six different types of pumps under the Hypro and SHUflo brands: centrifugal, transfer, roller, diaphragm, piston and plunger pumps.



“Positive displacement” vs. “Non-positive displacement”

Pumps can be divided into two general categories: “positive displacement” and “non-positive displacement.”

Positive Displacement – In a positive displacement pump the flow from the pump is directly proportional to the pump speed. Liquid is captured and discharged as a fixed volume per revolution of the pump shaft. This positive flow is why all positive displacement pump installations must include a relief valve and bypass line between the pump outlet and the nozzle shut-off valve. Roller, diaphragm, piston and plunger pumps are positive displacement pumps.

Non-positive Displacement – In a non-positive displacement pump a rotating impeller creates a centrifugal force that overcomes the restriction of liquid flow through the system. If the outlet is closed, the impeller continues to rotate harmlessly without damaging system components. Centrifugal and transfer pumps are non-positive displacement pumps.

Centrifugal Pumps -Spray & Transfer Applications (non-positive displacement)

In centrifugal pumps, liquid enters through the center of a rotating impeller that is driven at speeds up to 6000 RPM. Liquid is forced to the outer edge of the housing; this centrifugal force is what delivers the liquid to the nozzle. Traditionally thought of as low to medium pressure pumps, the Hypro line of centrifugal pumps can deliver from 0-150 psi (0-10 bar) and flow rates up to 440 gpm (1760 lpm). Centrifugal pumps have minimum surfaces to wear and no poppet valves, making them very durable, easy to maintain and well suited for pumping abrasive and corrosive materials. Because centrifugal pumps operate at higher speeds than the RPMs of a tractor PTO, the speed must be increased through a gear drive, belt drive, gas engine drive, or high-speed hydraulic motor drive. Pump models are specifically designed for each of these drive applications. The broad, versatile line includes models with rugged housings and components of cast iron, polypropylene, engineered plastics and stainless steel that endure the wide variety of agricultural chemicals.



Selecting the Right Pump

Diaphragm Pumps (positive displacement)



Diaphragm pumps are designed to isolate abrasive and corrosive solutions being pumped from its mechanical drive components through the use of synthetic diaphragms.

Diaphragm pumps are compact, self-priming and produce low-to-high pressures 0 to 725 psi (0-50 bar) with flow rates of 3.8 to 65.7 gpm (14.5 -260 lpm). Driven by 540 rpm PTO, gas engine, or hydraulic motor, diaphragm pumps are used for a variety of agricultural, horticultural and pest control spraying applications.

SHURflo pumps are efficient, 12 VDC electric motor driven low pressure diaphragm pumps designed for smaller spray applications with pressures 0-150 psi (0-10 bar) and flows 0-5.3 gpm (0-20 lpm). SHURflo pumps fit uniquely into mobile applications on ATV, home lawn care, fertilizer and pesticide equipment.



Roller Pumps (positive displacement)



The Hypro line of roller pumps are an economical choice by farmers throughout the world. The rollers revolve inside the pump housing on an eccentric profile to force spray solution through the pump which then develops pressure and flow. The roller pump offers a compact design with

mechanical simplicity to provide a low initial cost pump that is extremely versatile. They operate efficiently at PTO speeds of 540 and 1000 rpm and have a wide pressure range of up to 300 psi (20 bar) and flow rates of 2 to 62 gpm (7 to 235 lpm). Roller pumps are self-priming and easily adapt to PTO or gas engine drives. Specific seal, roller and casting materials can be selected for compatibility with certain herbicides, pesticides, fungicides and fertilizers.



Piston and Plunger Pumps (positive displacement)



Piston/Plunger pumps have a shaft, pistons or plungers and "inlet" and "outlet" poppet valves. The design of the pump converts the rotational drive into a oscillating vertical motion. On the down-stroke, the inlet valve opens, filling the chamber with solution. On the up-stroke, the outlet valve opens, and the piston forces the solution to the nozzle. Piston pumps deliver relatively low flow rate, less than 10 gpm (40 lpm), at pressures up to 1000 psi (69 bar). Plunger pumps are designed with ceramic plungers which can operate at higher pressures up to 2000 psi (138 bar) at flows up to 4 gpm (15 lpm). The main difference of construction is in a piston pump the sealing material moves with the piston while in a plunger pump the sealing material (u-cups) are stationary with only

the plunger in motion. The replaceable piston cups can be of leather, fabric or Buna-N rubber, depending on the type of solution to be sprayed. They can be driven by 540 rpm PTO, gas engine, hydraulic or electric motor. Their low volume/ high pressure capability permits use in general spraying as well as task-oriented applications such as spraying fence rows and ditches, and hydrostatic testing. Plunger pumps are used primarily for cleaning operations.

Selecting the Right Pump

2. Pump Drives

How a pump is to be driven is often a primary consideration in selecting the proper type of pump. If the power source has already been determined, the following chart may be of further help in selecting the type of pump that is best suited to your needs.

How do you plan to drive the pump?

If your power source is:		Roller	Centrifugal and Transfer	Diaphragm	Piston/Plunger
540 rpm PTO	direct coupled:	X		X	X
	through gear drive:		X		
	through belt/pulley:		X		
1000 rpm PTO	direct coupled:	X			
	through gear drive:		X		
	through belt/pulley:		X		
Hydraulic Motor		X	X	X	X
12 Volt DC Motor		X		X	X
Gas Engine	direct coupled:	X	X		
	through gear reduction:	X		X	X
	through belt/pulley:	X	X	X	X
Electric Motor	direct coupled:	X	X		
	through belt/pulley:	X	X	X	X

Selecting the Right Pump

3. Flow and Pressure Requirements

Pump pressure required is often dependent on the application. Whether it be low pressure band spraying or high pressure tree spraying, it is the application that dictates what pressure is needed to get the right performance at the spray nozzle. Once you know what pressure is desired choose a pump with extra pressure capacity due to losses in pressure as it goes through the system components (strainer, valves, elbows, hose, etc.) out to the nozzle.

How Much Pressure Do You Need?

Pressure		Flow		Pump
0-150 psi (0-10 bar)		0-1078 gpm (0-4080 lpm)		Centrifugal
0-150 psi (0-10 bar)		0-5 gpm (0-20 lpm)		SHURflo Diaphragm
0-300 psi (0-20 bar)		0-60 gpm (0-225 lpm)		Roller
0-725 psi (0-50 bar)		0-60 gpm (0-225 lpm)		HYPRO Diaphragm
0-1000 psi (0-69 bar)		0-10 gpm (0-38 lpm)		Piston/Plunger
0-1000+ psi (0-69+ bar)		0-4 gpm (0-15 lpm)		Plunger

Pump flow required is dependent on several factors. Application rate, width of boom or size of nozzle, speed of travel and agitation. To review your pump flow requirements follow through the calculations presented on the following pages. As with pressure you will want to choose a pump that has additional flow so that it meets your application needs over time as performance drops due to component wear.

How Much Flow Do You Need?

Flow		Pressure		Pump
0-4 gpm (0-15 lpm)		0-1000+ psi (70+ bar)		Plunger
0-5 gpm (0-20 lpm)		0-150 psi (0-10 bar)		SHURflo Diaphragm
0-10 gpm (0-38 lpm)		0-1000 psi (0-70 bar)		Piston/Plunger
0-60 gpm (0-225 lpm)		0-300 psi (0-20 bar)		Roller
0-60 gpm (0-225 lpm)		0-725 psi (0-50 bar)		HYPRO Diaphragm
0-1078 gpm (0-4080 lpm)		0-150 psi (0-10 bar)		Centrifugal

Selecting the Right Pump

Determining Pump Flow and Pressure Requirements

Every pumping task has an optimum volume and pressure requirement. Determining that optimum (and selecting the pump that delivers it) is key to an efficient and economical spraying system operation.

Pressure requirements for agricultural pumps are dependent on both the material to be applied and application targets. Soil-applied herbicides generally require a relatively low pressure pump rating of 30-60 psi with foliar-applied herbicides at the top end of that range and slightly higher. Insecticides and fungicides can require higher pressure ratings of 100 to 500 psi. Pressure must be sufficient, in the case of heavy foliage field crops and orchard crops, to penetrate the leaf foliage. In the case of orchard crops, pressure must also be sufficient to carry material up and over as well as into the canopy.

A number of factors must be considered to properly determine the total flow you will need from your pump. They include:

- Type of spray operation (broadcast, banding, low-level, etc.)
- The chemical's application rate, ground speed, boom width, hose length, tank agitation, etc.

The spray task is the first consideration in determining flow rate and pressure needs. The following formulas and calculations may help.

Calculating agitation requirements

The pump must produce enough flow for both the application rate and tank agitation requirements. Too little agitation will not keep the solution in proper suspension and too much agitation may cause foaming. Here are rule of thumb formulas for calculating how much additional pump flow you will need for agitation.

Liquids:

Tank volume (gallons) x .05 = total agitation in gpm

or

Tank volume (litres) x .05 = total agitation in lpm

Wetable Powders and Flowables:

Tank volume (gallons) x .125 = total agitation in gpm

or

Tank volume (litres) x .125 = total agitation in lpm

EXAMPLE: If you will be spraying a wettable powder from a 100-gallon tank, proper agitation will require 12.5 gpm additional flow from the pump.

Reducing agitation flow requirements

Agitation flow requirements can be reduced by using jet agitation in the tank. Jet agitators use a venturi design to multiply agitation output. Depending on the jet agitator model and pressure, one gallon per minute input can provide two to ten gallons per minute agitation output. If your sprayer is equipped with a jet agitator, consult the operator's manual or documentation to find the output to input ratio and adjust your flow required for agitation accordingly.

Agitation Flow with Jet Agitation:

required gpm x $\frac{\text{input}}{\text{output}}$

or

required lpm x $\frac{\text{input}}{\text{output}}$

For example: If you calculate a requirement of 63 gpm of agitation and your jet agitator produces 3 to 1 output to input ratio, your pump would only need 1/3 of 63 gpm, or 21 gpm.

Selecting the Right Pump

Factor in an “Excess Flow” Requirement

It is wise to have some excess flow capacity so you will not end up with an undersized pump because actual operation conditions may cause changes in spray system performance (such as normal pump wear, operating at less than rated speeds, etc.). Hypro recommends you add an additional 20% to your calculated total pump flow requirement to compensate for these variables. Plumbing systems have a number of restrictions that will result in a pressure drop from the pump to the actual spray point. These must be taken into account and minimized.

Calculating pump flow for broadcast boom sprayers

Chemical application is measured in gallons per acre (gpa) or litres per hectare (l/ha), whereas pump flow is stated in gallons per minute (gpm) or litres per minute (lpm). To calculate the pump flow required by a broadcast boom sprayer, multiply the application rate (from the chemical label) by the sprayer ground speed. Multiply the sum by the boom width on your sprayer. Then, divide that number by 495 for US units or by 600 for metric units. As a formula, it is written like this:

Flow required for boom:

$$\text{gpm} = \frac{\text{gpa} \times \text{mph} \times \text{boom width (ft.)}}{495}$$

or

$$\text{lpm} = \frac{\text{l/ha} \times \text{km/hr} \times \text{boom width (m)}}{600}$$

The result will be the pump flow required to deliver the proper application rate at the boom's nozzles. Then calculate your total pump flow requirement (broadcast):

Flow required for boom:	_____ gpm
Flow required for agitation:	+ _____ gpm
Sub-total	= _____ gpm
Excess flow requirement:	x <u>1.20</u>
TOTAL PUMP FLOW NEEDED:	= _____ gpm

or

Flow required for boom:	_____ lpm
Flow required for agitation:	+ _____ lpm
Sub-total	= _____ lpm
Excess flow requirement:	x <u>1.20</u>
TOTAL PUMP FLOW NEEDED:	= _____ lpm

Calculating pump flow for banding sprayers

First, multiply the band width by the number of rows to determine the total width (w). Then, multiply the application rate (from the chemical label) by the ground speed. Multiply that result by the total width (w) calculated earlier, then divide the result by 5940 for US units or 60,000 for metric units. Here's how the formula appears:

Total band width of sprayer:

$$w = \text{rows} \times \text{band width (inches)}$$

or

$$w = \text{rows} \times \text{band width (cm)}$$

Flow required for banding nozzles:

$$\text{gpm} = \frac{\text{gpa} \times \text{mph} \times w}{5940}$$

or

$$\text{lpm} = \frac{\text{l/ha} \times \text{km/hr} \times w}{60,000}$$

The result will be the pump flow required to deliver the proper application rate at the boom's nozzles. Then calculate your total pump flow requirement (banding):

Flow required for boom:	_____ gpm
Flow required for agitation:	+ _____ gpm
Sub-total	= _____ gpm
Excess flow requirement:	x <u>1.20</u>
TOTAL PUMP FLOW NEEDED:	= _____ gpm

or

Flow required for boom:	_____ lpm
Flow required for agitation:	+ _____ lpm
Sub-total	= _____ lpm
Excess flow requirement:	x <u>1.20</u>
TOTAL PUMP FLOW NEEDED:	= _____ lpm

Selecting the Right Pump

Calculating pump flow for hand gun spraying

For low-level spraying with a hand gun, such as for lawn and turf care, professional applicators typically “walk” the lawn at about 1,000 sq. ft. per minute or 100 sq. m per minute. That means the “gpm” or “lpm” rate of the hand gun will generally be the same as “gallons per 1,000 sq. ft.” or “litres per 100 sq. m.”

To determine your total pump flow requirement:

Flow required for gun/nozzle:	_____	gallons per 1,000ft ² (same as gpm)
Flow required for agitation:	+ _____	gpm
Sub-total	= _____	gpm
Excess flow requirement:	x 1.20	
TOTAL PUMP FLOW NEEDED:	= _____	gpm

or

Flow required for gun/nozzle:	_____	Litres per 100 m ² (same as lpm)
Flow required for agitation:	+ _____	lpm
Sub-total	= _____	lpm
Excess flow requirement:	x 1.20	
TOTAL PUMP FLOW NEEDED:	= _____	lpm

Use this same method for calculating the pump flow requirement for high pressure spraying, such as trees. Even though the application “rate” is usually a visual saturation of the tree, the known gpm or lpm factor will be the hand gun nozzle output, which is the rate you use for the calculation.

Calculating pump pressure for hand gun spraying

For most hand gun chemical spraying, 40 psi (3 bar) at the nozzle is typical. To properly select a pump that can deliver the right nozzle pressure, you must consider the normal “pressure drop” that occurs within the length of hose. The amount of pressure drop through the hose depends on hose length, hose diameter and flow rate. For example, 300’ (90 m) of 1/2” hose spraying at 6 gpm (23 lpm), will have a pressure drop of approximately 120 psi (8 bar). That means you need a pump delivering at least 160 psi (12 bar) in order to ensure 40 psi (3 bar) at the nozzle.

Desired pressure at gun nozzle:	_____	psi
Hose pressure loss:	+ _____	psi
TOTAL PUMP PRESSURE NEEDED:	= _____	psi

or

Desired pressure at gun nozzle:	_____	bar
Hose pressure loss:	+ _____	bar
TOTAL PUMP PRESSURE NEEDED:	= _____	bar

NOTE: When determining the total pump pressure requirement for high tree spraying, you must also consider the spray height (or reach) you need to attain. Generally, pumps of up to 700 psi (50 bar) are used for this purpose.

Gear Driven, Cast Iron

Series 9000C-O



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Planetary oil-bath gear drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Cast iron
- Impeller: Nylon
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Pump seals: Viton®/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 44 lbs./20 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output	Locking Collar and Mounting Clip
9006C-O	117	443	78	5.4	600	1-3/8" 6 spline (SAE) 540 rpm female	x
9008C-O	110	416	75	5.2	1000	1-3/8" 21 spline (SAE) 1000 rpm female	x
9016C-O	117	443	78	5.4	600	1" [25.4 mm] Solid Shaft	
9018C-O	110	416	75	5.2	1000	1" [25.4 mm] Solid Shaft	
9028C-O	110	416	75	5.2	1000	1-3/4" 20 spline (SAE) 1000 rpm female	x
90029	110	416	75	5.2	1000	38mm 8 spline 1000 rpm female	x
3430-0334	Seal and o-ring repair kit						
3430-0591	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9006C-O-B)

9006C-O, 9016C-O

U.S. Units

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
500	97	86	71	47		
540	106	96	87	70	47	
600	117	113	104	96	82	63

9006C-O, 9016C-O

Metric Units

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
500	367	326	269	178		
540	401	363	329	265	178	
600	443	428	394	363	310	238

9008C-O, 9018C-O, 9028C-O, 90029

U.S. Units

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
800	82	70	53			
900	96	88	76	60	24	
1000	110	102	96	86	70	46

9008C-O, 9018C-O, 9028C-O, 90029

Metric Units

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
800	310	265	201			
900	363	333	288	227	91	
1000	416	386	363	326	265	174

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Gear Driven, Cast Iron, Self-Priming

Series 9000C-O-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Planetary oil-bath gear drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Cast iron
- Impeller: Nylon
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Pump seals: Viton®/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 62 lbs./28.2 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output	Locking Collar and Mounting Clip
9006C-O-SP	119	450	77	5.3	600	1-3/8" 6 spline (SAE) 540 rpm	x
9016C-O-SP	119	450	77	5.3	600	1" [25.4 mm] solid shaft	
9028C-O-SP	117	443	69	4.35	1000	1-3/4" 20 spline (SAE) 1000 rpm	x
3430-0334	Seal and o-ring repair kit						
3430-0591	Life Guard silicon carbide seal kit						
3430-0480SP	Self priming chamber kit						

Life Guard silicon carbide seal - Available upon request

9006C-O-SP, 9016C-O-SP

U.S. Units

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
500	101	95	77	51	12		
540	111	109	94	74	47	11	
600	119	118	112	97	79	54	23

9006C-O-SP, 9016C-O-SP

Metric Units

RPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
500	382	360	291	193	45		
540	420	413	356	280	178	42	
600	450	447	424	367	299	204	87

9028C-O-SP

U.S. Units

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
800	91	81	57	19		
940	105	101	84	60	25	
1000	117	114	104	87	65	33


9028C-O-SP

Metric Units

RPM	LPM at .07 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
800	344	307	216	72		
940	397	382	318	227	95	
1000	443	432	394	329	246	125

Gear Driven, Polypropylene

Series 9000P-O

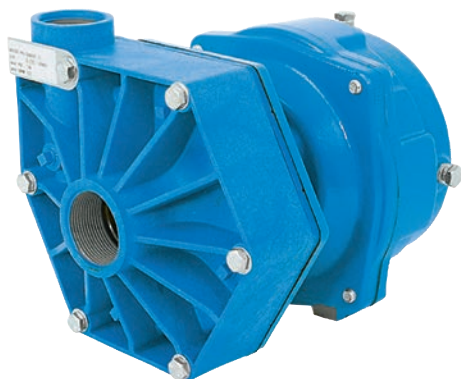

Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Planetary oil-bath gear drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Polypropylene
- Impeller: Polypropylene
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 37 lbs./16.8 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output	Locking Collar Kit
9006P-O	97	367	83	5.7	600	1 3/8" 6 spline (SAE) 540 rpm female	x
9008P-O	94	355	67	4.6	1000	1 3/8" 21 spline (SAE) 1000 rpm female	x
9016P-O	97	367	83	5.7	600	1" (25.4 mm) solid shaft	
9018P-O	94	355	67	4.6	1000	1" (25.4 mm) solid shaft	
3430-0333	Seal and o-ring repair kit						
3430-0590	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9006P-O-B)

9006P-O, 9016P-O

U.S. Units

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
450	73	63	52	34			
500	81	77	67	55	37		
550	88	85	78	68	56	36	
600	97	97	93	85	76	66	52

9006P-O, 9016P-O

Metric Units

RPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
450	276	239	196	129			
500	307	291	255	208	142		
550	333	323	295	257	210	137	
600	367	367	354	323	288	249	198

9008P-O, 9018P-O

U.S. Units

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
800	70	64	53	34		
900	83	79	70	58	42	
1000	96	92	86	78	67	52

9008P-O, 9018P-O

Metric Units

RPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
800	314	243	200	128		
900	363	299	265	220	161	
1000	327	348	327	296	254	198

Gear Driven, Cast Iron

Series 9047C



Features

- Parallel oil-bath gear drive
- Max. fluid temperature: 140° F/60° C
- Impeller: Nylon
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Life Guard silicon carbide seal standard for increased life and dry-run protection
- Life Guard seals are the industry standard on OEM equipment
- Available in NPT and BSP self-priming versions

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output	Port Sizes
9047C	213	805	180	12.4	540	1-3/8" [SAE] 540 RPM Male	2" NPT inlet x 1-1/2" NPT outlet
9047C-SP	195	740	170	11.7	540	1-3/8" [SAE] 540 RPM Male	2" NPT inlet x 2" NPT outlet
9047C-BSP	195	740	170	11.7	540	1-3/8" [SAE] 540 RPM Male	2" BSP inlet x 2" BSP outlet
3430-0779	Seal & O-ring repair kit						

9047C

U.S. Units

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI	GPM at 140 PSI	GPM at 150 PSI	GPM at 160 PSI	GPM at 170 PSI	GPM at 180 PSI
450	189	189	188	188	186	184	176	168	140	119	66	-	-	-	-	-	-
500	199	199	199	198	197	196	195	194	193	186	172	145	106	-	-	-	-
540	213	211	211	210	209	209	208	207	206	205	201	195	192	174	148	116	66

9047C

Metric Units

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 8.9 BAR	LPM at 9.7 BAR	LPM at 10.3 BAR	LPM at 11.0 BAR	LPM at 11.7 BAR	LPM at 12.4 BAR
450	715	715	712	710	705	695	665	635	530	450	250	-	-	-	-	-	-
500	755	755	755	750	745	742	740	735	730	705	650	550	400	-	-	-	-
540	805	800	800	795	790	790	789	785	778	775	760	740	725	660	560	440	250

9047C-SP, 9047C-BSP

U.S. Units

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI	GPM at 140 PSI	GPM at 150 PSI	GPM at 160 PSI
450	174	173	169	166	157	140	119	92	61	26	-	-	-	-	-
500	185	182	180	178	174	172	164	153	132	119	95	69	20	-	-
540	195	194	194	193	190	186	184	181	174	162	148	127	99	79	53

9047C-SP, 9047C-BSP

Metric Units

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 8.9 BAR	LPM at 9.7 BAR	LPM at 10.3 BAR	LPM at 11.0 BAR
450	660	655	640	630	595	530	450	350	230	100	-	-	-	-	-
500	700	690	680	675	660	650	620	580	500	450	360	260	75	-	-
540	740	735	735	730	720	705	695	685	660	615	560	480	375	300	200

Pedestal Mount, Cast Iron & Stainless Steel

Series 9202C and 9202S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Pedestal mount, direct drive
- Port sizes: 1-1/4" NPT inlet, 1" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon (cast iron standard); polypropylene (stainless standard)
- Pump shaft rotation: Counter clockwise when looking at the shaft end, 9202S-R is Clockwise
- Pump seals: Viton/ceramic standard (Life Guard silicon carbide (B) available); Life Guard silicon carbide standard in stainless steel pumps
- Life Guard seals are the industry standard on OEM equipment
- Weight: 18 lbs./8.2 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9202C	103	390	170	11.7	6000	5/8" (15.9 mm) solid shaft
9202S	103	390	170	11.7	6000	5/8" (15.9 mm) stainless steel shaft
9202S-R	103	390	170	11.7	6000	5/8" (15.9 mm) stainless steel shaft
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9202C-B)

9202C, 9202S, 9202S-R

U.S. Units

RPM	10 PSI		20 PSI		40 PSI		60 PSI		80 PSI		100 PSI		120 PSI		140 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	50	1.3	46	1.2												
3600	67	3.7	66	3.7	62	3.5	34	2.6								
4200	75	5.7	75	5.7	75	5.7	66	5.3	44	4.2						
5000	88	9.3	88	9.3	88	9.3	88	9.3	77	8.6	60	7.5	24	6.4		
6000	103	15.6	103	15.6	103	15.6	103	15.6	103	15.6	100	15.5	91	14.8	75	14

9202C, 9202S, 9202S-R

Metric Units

RPM	0.7 BAR		1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR		8.3 BAR		9.7 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	189	1.3	174	1.2												
3600	254	3.7	250	3.7	235	3.5	129	2.6								
4200	284	5.7	284	5.7	284	5.7	250	5.3	167	4.2						
5000	333	9.3	333	9.3	333	9.3	333	9.3	291	8.6	227	7.5	91	6.4		
6000	390	15.6	390	15.6	390	15.6	390	15.6	390	15.6	379	15.5	344	14.8	284	14

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Pedestal Mount, Cast Iron & Stainless Steel

Series 9203C and 9203S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Pedestal mount, direct drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- 220 x 200 Universal flange available (U)
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon (cast iron standard); polypropylene (stainless standard); GTX available
- Pump shaft rotation: Counter clockwise when looking at the shaft end; 9203C-R is clockwise
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Stainless steel models now available with universal flanges
- Weight: 19 lbs./8.6 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max PSI (BAR)	Max RPM	Shaft Output
9203C †	140	530	170	11.7	6000	5/8" (15.9 mm) solid shaft
9203C-R (CW)	140	530	170	11.7	6000	5/8" (15.9 mm) solid shaft
9203S †	140	530	170	11.7	6000	5/8" (15.9 mm) stainless steel shaft
9203S-R (CW)	140	530	170	11.7	6000	5/8" (15.9 mm) stainless steel shaft
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

† Universal Flange (220 x 200) - Add Suffix "U" (i.e.: 9203C-U)
Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9203C-B)

9203C, 9203S, 9203C-R, 9203S-R

U.S. Units

RPM	10 PSI		20 PSI		40 PSI		60 PSI		80 PSI		100 PSI		120 PSI		140 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	80	1.9	65	1.8												
3600	105	5.3	105	5.3	92	5.0	50	3.7								
4200	122	8.2	120	7.9	115	7.7	98	7.1	56	5.3						
5000	140	12.6	140	12.6	138	12.6	130	12.2	118	11.6	88	9.9	45	7.2		
5500	140	14.9	140	14.9	138	14.9	135	15.2	130	15.2	118	14.4	90	12.5	60	9.8
6000	140	17.1	140	17.1	140	17.5	140	18.0	135	18.2	132	18	125	18.2	103	16.3

9203C, 9203S, 9203C-R, 9203S-R

Metric Units

RPM	0.7 BAR		1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR		8.3 BAR		9.7 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	303	1.9	246	1.8												
3600	397	5.3	397	5.3	348	5.0	189	3.7								
4200	462	8.2	454	7.9	435	7.7	371	7.1	212	5.3						
5000	530	12.6	530	12.6	522	12.6	492	12.2	447	11.6	333	9.9	170	7.2		
5500	530	14.9	530	14.9	522	14.9	511	15.2	492	15.2	447	14.4	341	12.5	227	9.8
6000	530	17.1	530	17.1	530	17.5	530	18.0	511	18.2	500	18	473	18.2	409	16.3

Pedestal Mount, Cast Iron & Stainless Steel, Self-Priming

Series 9203C-SP and 9203S-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Pedestal mount, direct drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet (9203C-SP, 9203S-SP); 2" NPT inlet, 2" NPT outlet (9203C-R-SP)
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon (cast iron standard); polypropylene (stainless steel); GTX available
- Pump shaft rotation: Counter clockwise when looking at the shaft end; 9203C-R-SP is clockwise
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Weight: 31.7 lbs./14.4 kg – Stainless Steel; 29 lbs./13.2 kg – Cast Iron

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9203C-SP	120	454	157	10.8	6000	5/8" (15.9 mm) solid shaft
9203C-R-SP (CW)	140	530	155	10.7	6000	5/8" (15.9 mm) solid shaft
9203S-SP	120	454	157	10.8	6000	5/8" (15.9 mm) stainless steel shaft
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					
3430-0480SP	Self priming chamber kit					
3430-0482SP	Self priming chamber kit for reverse rotation ONLY					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9203C-SP-B)

9203C-R-SP

U.S. Units

RPM	20 PSI		40 PSI		60 PSI		80 PSI		100 PSI		120 PSI		140 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
3600	80	3.8	43	2.9										
4200	102	6.1	76	5.4	38	4								
5000	127	10.5	109	9.8	86	8.7	55	7.2	18	5.4				
5500	135	13.5	125	13.1	110	12.3	83	10.9	57	9.3	21	6.9		
6000	138	15.7	132	15.7	122	15.1	111	14.1	93	13.2	67	12.2	32	9.5

9203C-R-SP

Metric Units

RPM	1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR		8.3 BAR		9.7 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
4200	386	6.1	288	5.4	144	4								
5000	481	10.5	413	9.8	326	8.7	208	7.2	68	5.4				
5500	511	13.5	473	13.1	416	12.3	314	10.9	216	9.3	79	6.9		
6000	522	15.7	500	15.7	462	15.1	420	14.1	352	13.2	254	12.2	121	9.5

9203C-SP, 9203S-SP

U.S. Units

RPM	20 PSI		40 PSI		60 PSI		80 PSI		100 PSI		120 PSI		140 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
3600	101	4.2	60	3.4										
4200	118	6.7	97	6.1	54	4.7								
5000	120	10.1	119	10.3	110	10.1	78	8.7	25	5.8				
5500	120	12.1	119	12.7	116	13.2	110	12.8	79	11.0	29	7.6		
6000	120	14.3	119	15.0	116	15.7	114	16.0	110	16.0	82	14.0	40	10.6

9203C-SP, 9203S-SP

Metric Units

RPM	1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR		8.3 BAR		9.7 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
3600	382	4.2	227	3.4										
4200	447	6.7	367	6.1	204	4.7								
5000	458	10.1	450	10.3	416	10.1	295	8.7	95	5.8				
5500	458	12.1	450	12.7	439	13.2	416	12.8	299	11.0	110	7.6		
6000	458	14.3	450	15.0	439	15.7	432	16.0	416	16.0	310	14.0	157	10.6

Pedestal Mount, Cast Iron

Series 9205C



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Pedestal mount, direct drive
- Port sizes: 2" NPT inlet, 1-1/2" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Cast iron
- Impeller: Nylon
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 47 lbs./21.4 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9205C	180	681	196	13.5	4200	7/8" (22.2 mm) solid keyed shaft
3430-0537	Seal and o-ring repair kit					
3430-0646	Life Guard silicon carbide seal kit					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9205C-B)

9205C

U.S. Units

RPM	20 PSI		40 PSI		60 PSI		80 PSI		100 PSI		120 PSI		140 PSI		160 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
3000	165	11.4	164	11.7	154	11.6	104	9.5								
3400	175	14.8	175	15.5	173	16.3	168	16.3	127	14.2	43	8.7				
3800	180	18.2	180	18.8	180	19.8	178	21.1	173	21.8	156	20.7	112	17.5		
4200	180	21.9	180	22.0	180	24.0	180	25.3	180	26.9	177	27.9	173	28.1	157	26.4

9205C

Metric Units

RPM	1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR		8.3 BAR		9.7 BAR		11.0 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
3000	625	11.4	621	11.7	583	11.6	394	9.5								
3400	662	14.8	662	15.5	655	16.3	636	16.3	481	14.2	163	8.7				
3800	681	18.2	681	18.8	681	19.8	674	21.1	655	21.8	591	20.7	424	17.5		
4200	681	21.9	681	22.0	681	24.0	681	25.3	681	26.9	670	27.9	655	28.1	594	26.4

Pedestal Mount, Cast Iron, Self-Priming

Series 9205C-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Pedestal mount, direct drive
- Port sizes:
2" NPT inlet, 2" NPT outlet (9205C-SP)
2" BSP inlet, 2" BSP outlet (9205C-BSP)
- Max. fluid temperature: 140°F/60°C
- Housing: Cast iron
- Impeller: Nylon
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 48 lbs./21.8 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9205C-SP	160	606	145	10.0	3800	7/8" (22.2 mm) solid keyed shaft
9205C-BSP	160	606	145	10.0	3800	7/8" (22.2 mm) solid keyed shaft
3430-0537	Seal and o-ring repair kit					
3430-0646	Life Guard silicon carbide seal kit					
3430-0481SP	Self priming chamber kit					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9205C-SP-B)

9205C-SP, 9205C-BSP

U.S. Units

RPM	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI	GPM at 140 PSI
3400	155	154	153	150	131	110	84	35			
3600	158	157	156	155	153	137	114	88	58		
3800	160	159	158	157	156	155	142	123	102	74	28

9205C-SP, 9205C-BSP

Metric Units

RPM	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 8.9 BAR	LPM at 9.7 BAR
3400	587	583	579	568	496	416	318	132			
3600	598	594	591	587	579	518	432	333	220		
3800	606	602	598	594	591	587	538	466	383	280	106

Pedestal Mount, Cast Iron & Stainless Steel

Series 9206C and 9206S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Pedestal mount, direct drive
- Port sizes: 2" NPT inlet, 1-1/2" NPT outlet
- 220 x 220 (U) and 300 x 220 (-3U models) universal flange available
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon (standard in cast iron); polypropylene (standard in stainless steel); GTX available
- Pump shaft rotation: Counter clockwise when looking at the shaft end
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Weight: 23 lbs./10.5 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket
- ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9206C*	225	852	80	5.5	4200	5/8" (15.9 mm) solid shaft
9206S	225	852	80	5.5	4200	5/8" (15.9 mm) stainless steel shaft
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

*Universal Flange (220 x 220) - Add Suffix "U" (i.e.: 9206C-U),
 Universal Flange (300 x 220) - Add Suffix "3U" (i.e.: 9206C-3U),
 Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9206C-B)

9206C, 9206S, 9206C-U, 9206S-3U

U.S. Units

RPM	10 PSI		20 PSI		30 PSI		40 PSI		50 PSI		60 PSI		70 PSI		80 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	171	2.3	114	2.0												
3600	225	7.0	225	7.1	225	7.5	196	7.3	143	6.1						
4200	225	9.2	225	9.4	225	10.7	225	11.0	225	11.3	202	10.9	158	9.5	80	6.4

9206C, 9206S, 9206C-U, 9206S-3U

Metric Units

RPM	0.7 BAR		1.4 BAR		2.1 BAR		2.8 BAR		3.4 BAR		4.1 BAR		4.8 BAR		5.5 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	647	2.3	432	2.0												
3600	852	7.0	852	7.1	852	7.5	742	7.3	541	6.1						
4200	852	9.2	852	9.4	852	10.7	852	11.0	852	11.3	765	10.9	598	9.5	303	6.4

Pedestal Mount, Cast Iron

Series 9208



Features

- 5" ANSI-flanged inlet x 4" ANSI-flanged outlet
- 316 stainless steel impeller for superior corrosion resistance
- 9208 version includes a solid 416 stainless steel shaft for corrosion resistance
- The 9208 shaft diameter is 1.63" (41.3 mm) to allow direct coupling to electric motors
- Life Guard silicon carbide seal for premium abrasion resistance and dry run protection
- Life Guard seals are the industry standard on OEM equipment
- Pump shaft rotation: Counter clockwise when looking at the shaft end

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9208C	1400	5300	85	5.9	3000	1-5/8" (41.3 mm) solid keyed Stainless Steel shaft
3430-0604	Life Guard silicon carbide seal kit					

9208C

U.S. Units

RPM	20 PSI		40 PSI		60 PSI	
	GPM	HP	GPM	HP	GPM	HP
1750	607	10.8				
2500	1071	32.3	852	31.0	474	24.4
2750	1052	38.5	1027	42.0	788	38.2

9208C

Metric Units

RPM	1.4 BAR		2.8 BAR		4.1 BAR	
	LPM	HP	LPM	HP	LPM	HP
1750	2298	10.8				
2500	4054	32.3	3225	31.0	1794	24.4
2750	3982	38.5	3888	42.0	2983	38.2

Pedestal Mount, Polypropylene

Series 9203P-S and 9500P-S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Pedestal mount
- For belt and pulley drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Polypropylene
- Impeller: Polypropylene
- Pump shaft rotation: Counter clockwise 9203P-S, when looking at the shaft end; 9500P-S is clockwise
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 14 lbs./6.4 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9203P-S	100	379	82	5.7	4200	7/8" (22.2 mm) solid keyed stainless steel shaft
9500P-S	100	379	82	5.7	4200	7/8" (22.2 mm) solid keyed stainless steel shaft
3430-0333	Seal and o-ring repair kit					
3430-0590	Life Guard silicon carbide seal kit					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9203P-S-B)

9203P-S, 9500P-S

U.S. Units

RPM	10 PSI		20 PSI		30 PSI		40 PSI		50 PSI		60 PSI		70 PSI		80 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	55	1.5	49	1.4	32	1.1										
3600	89	4.4	87	4.3	81	4.1	71	3.9	58	3.6	37	3.1				
4200	100	6.7	100	6.6	97	6.5	90	6.3	82	6.0	71	5.7	60	5.2	39	4.4

9203P-S, 9500P-S

Metric Units

RPM	0.7 BAR		1.4 BAR		2.1 BAR		2.8 BAR		3.4 BAR		4.1 BAR		4.8 BAR		5.5 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	208	1.5	185	1.4	121	1.1										
3600	337	4.4	329	4.3	307	4.1	269	3.9	220	3.6	140	3.1				
4200	379	6.7	379	6.6	367	6.5	341	6.3	310	6.0	269	5.7	227	5.2	148	4.4

Pedestal Mount, Clutch-Driven, Polypropylene

Series 9253P-C and 9553P-C



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Pedestal mount with DC clutch drive
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Polypropylene
- Impeller: Polypropylene
- Pump shaft rotation: Counter clockwise when looking at the shaft end; 9553P-C is clockwise
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Clutch: 12 volt with 5-1/2" (140 mm) diameter A-section pulley (part # 2526-0011)
- Weight: 19 lbs./8.6 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Rotation
9253P-C	100	379	82	5.7	4200	CCW
9553P-C	100	379	82	5.7	4200	CW
3430-0333	Seal and o-ring repair kit					
3430-0590	Life Guard silicon carbide seal kit					

Life Guard silicon carbide seal - Add suffix "B" [i.e.: 9253P-C-B]

9253P-C, 9553P-C

U.S. Units

RPM	10 PSI		20 PSI		30 PSI		40 PSI		50 PSI		60 PSI		70 PSI		80 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	55	1.5	49	1.4	32	1.1										
3600	89	4.4	87	4.3	81	4.1	71	3.9	58	3.6	37	3.1				
4200	100	6.7	100	6.6	97	6.5	90	6.3	82	6.0	71	5.7	60	5.2	39	4.4

9253P-C, 9553P-C

Metric Units

RPM	0.7 BAR		1.4 BAR		2.1 BAR		2.8 BAR		3.4 BAR		4.1 BAR		4.8 BAR		5.5 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	208	1.5	185	1.4	121	1.1										
3600	337	4.4	329	4.3	307	4.1	269	3.9	220	3.6	140	3.1				
4200	379	6.7	379	6.6	367	6.5	341	6.3	310	6.0	269	5.7	227	5.2	148	4.4

Flange Mount, Polypropylene

Series 9513P



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Mounts clockwise rotation (when looking at the shaft end) — for direct mount to gasoline engines
- Shaft: 3/4" (19 mm) hollow, 416 stainless steel
- Port size: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Polypropylene
- Impeller: Polypropylene
- Flange bolt pattern for 5 hp gas engine
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 19 lbs./8.6 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output
9513P	91	344	65	4.5	3600	3/4" hollow keyed stainless steel shaft for direct coupling to 5hp engine
3430-0333	Seal and o-ring repair kit					
3430-0590	Life Guard silicon carbide seal kit					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9513P-B)

9513P — Based on 5.5 HP HONDA® Engine

U.S. Units

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
92	91	88	81	70	58	42

9513P — Based on 5.5 HP HONDA® Engine

Metric Units

LPM at 0.0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
348	344	333	307	265	220	159

Honda® is a registered trademark of Honda Motor Co., Ltd.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair Ltd.

Pedestal Mount, Clutch-Driven, Cast Iron & Stainless Steel

Series 9262C-C and 9262S-C



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Pedestal mount with DC clutch drive
- Double "A" groove pulley (5"/125 mm diameter)
- Port sizes: 1-1/4" NPT inlet, 1" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Available in cast iron and 316 stainless steel for extended pump life
- Impeller: Nylon (standard in cast iron); polypropylene (standard in stainless steel); GTX available
- Pump shaft rotation: Counter clockwise when looking at the shaft end; Clockwise for -CR models
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Amp draw: 45 watts at 12 volts
- Weight: 23 lbs./10.5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max PSI	Max RPM	Rotation
9262C-C	88	333	114	7.9	5000	CCW*
9262C-CR	88	333	114	7.9	5000	CW*
9262S-C	145	549	114	7.9	5000	CCW*
9262S-CR	145	549	114	7.9	5000	CW*
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9262C-CB)

*CCW (counterclockwise) CW (clockwise) are determined when looking at the shaft end.

9262C-C, 9262C-CR

U.S. Units

RPM	10 PSI		20 PSI		40 PSI		60 PSI		80 PSI		100 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	50	1.3	46	1.2								
3600	67	3.7	66	3.7	62	3.5	25	2.8				
4200	75	5.7	75	5.7	75	5.7	66	5.3	40	4.6		
5000	88	9.3	88	9.3	88	9.3	88	9.3	77	8.6	60	7.5

9262C-C, 9262C-CR

Metric Units

RPM	0.7 BAR		1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	189	1.3	174	1.2								
3600	254	3.7	250	3.7	235	3.5	95	2.8				
4200	284	5.7	284	5.7	284	5.7	250	5.3	151	4.6		
5000	333	9.3	333	9.3	333	9.3	333	9.3	291	8.6	227	7.5

9262S-C, 9262S-CR

U.S. Units

RPM	10 PSI		20 PSI		40 PSI		60 PSI		80 PSI		100 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	73	1.4	55	1.2								
3600	112	4.5	109	4.5	86	4.0	25	2.8				
4200	128	7.1	127	7.1	116	6.8	92	6.1	40	4.6		
5000	145	11.8	145	11.8	143	11.7	133	11.3	115	10.4	86	9.1

9262S-C, 9262S-CR

Metric Units

RPM	0.7 BAR		1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	276	1.4	208	1.2								
3600	424	4.5	413	4.5	326	4.0	95	2.8				
4200	484	7.1	481	7.1	439	6.8	348	6.1	151	4.6		
5000	549	11.8	549	11.8	541	11.7	503	11.3	435	10.4	326	9.1

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Pedestal Mount, Clutch-Driven, Cast Iron & Stainless Steel, Self-Priming

Series 9263C-SP and 9263S-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Double "A" groove pulley (5"/125 mm diameter)
- Pedestal mount with DC clutch drive
- Max fluid temperature: 140° F/60° C
- Impeller: Nylon (standard in cast iron); polypropylene (standard in stainless steel); GTX available
- Pump seals: Cast Iron models - Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models - Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Amp draw: 45 watts at 12 volts

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Rotation	Port Sizes
9263C-CR-SP	127	481	110	7.6	5000	CW*	2" NPT inlet x 2" NPT outlet
9263C-CR-SP-B	127	481	110	7.6	5000	CW*	2" NPT inlet x 2" NPT outlet
9263C-C-SP	120	454	110	7.6	5000	CCW*	1-1/2" NPT inlet x 1-1/4" NPT outlet
9263S-C-SP	120	454	110	7.6	5000	CCW*	1-1/2" NPT inlet x 1-1/4" NPT outlet
3430-0332	Seal and o-ring repair kit						
3430-0589	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9263-CR-SP-B)

*CCW (counterclockwise) CW (clockwise) are determined when looking at the shaft end.

9263C-CR-SP, 9263C-CR-SP-B

U.S. Units

RPM	20 PSI		30 PSI		40 PSI		50 PSI		60 PSI		70 PSI		80 PSI		90 PSI		100 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
3600	80	3.8	64	3.4	43	2.9	17	2.6										
4200	102	6.1	90	5.8	76	5.4	59	4.7	38	4.0	16	3.7						
5000	127	10.5	119	10.2	109	9.8	99	9.3	86	8.7	70	7.9	55	7.2	37	6.2	18	5.4

9263C-CR-SP, 9263C-CR-SP-B

Metric Units

RPM	1.4 BAR		2.1 BAR		2.8 BAR		3.4 BAR		4.1 BAR		4.8 BAR		5.5 BAR		6.2 BAR		6.9 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
3600	303	3.8	242	3.4	163	2.9	64	2.6										
4200	386	6.1	341	5.8	288	5.4	223	4.7	144	4.0	61	3.7						
5000	481	10.5	450	10.2	413	9.8	375	9.3	326	8.7	265	7.9	208	7.2	140	6.2	68	5.4

9263C-C-SP, 9263S-C-SP

U.S. Units

RPM	20 PSI		30 PSI		40 PSI		50 PSI		60 PSI		70 PSI		80 PSI		90 PSI		100 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
3600	101	4.2	84	3.9	60	3.4	25	2.6										
4200	118	6.7	112	6.7	97	6.1	79	5.5	54	4.7	23	4.0						
5000	120	10.1	120	10.3	119	10.3	117	10.2	110	10.1	96	9.6	78	8.7	52	7.2	25	5.8

9263C-C-SP, 9263S-C-SP

Metric Units

RPM	1.4 BAR		2.1 BAR		2.8 BAR		3.4 BAR		4.1 BAR		4.8 BAR		5.5 BAR		6.2 BAR		6.9 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
3600	382	4.2	318	3.9	227	3.4	95	2.6										
4200	447	6.7	424	6.7	367	6.1	299	5.5	204	4.7	87	4.0						
5000	454	10.1	454	10.3	450	10.3	443	10.2	416	10.1	363	9.6	295	8.7	197	7.2	95	5.8

Pedestal Mount, Clutch-Driven, Cast Iron & Stainless Steel

Series 9263C-C and 9263S-C



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Pedestal mount with DC clutch drive
- Double "A" groove pulley (5"/125 mm diameter)
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- 220 x 200 universal flange available (U)
- Stainless steel models now available with universal flanges
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon (standard in cast iron); polypropylene (standard in stainless steel); GTX available
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Amp draw: 45 watts at 12 volts
- Weight: 23 lbs./10.5 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket
- ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Rotation
9263C-C †	140	530	114	7.9	5000	CCW*
9263C-CR	140	530	114	7.9	5000	CW*
9263S-C †	140	530	114	7.9	5000	CCW*
9263S-CR	140	530	114	7.9	5000	CW*
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

† Universal Flange [220 x 200] - Add Suffix "U" (i.e.: 9263C-C-U)

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9263C-CB)

*CCW (counterclockwise) CW (clockwise) are determined when looking at the shaft end.

9263C-C, 9263S-C, 9263C-CR, 9263S-CR, 9263C-C-U, 9263S-C-U

U.S. Units

RPM	10 PSI		20 PSI		40 PSI		60 PSI		80 PSI		100 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
2400	80	1.9	65	1.8								
3600	105	5.3	105	5.3	92	5.0	50	3.7				
4200	122	8.2	120	7.9	115	7.7	98	7.1	56	5.3		
5000	140	12.6	140	12.6	138	12.6	130	12.2	118	11.6	88	9.9

9263C-C, 9263S-C, 9263C-CR, 9263S-CR, 9263C-C-U, 9263S-C-U

Metric Units

RPM	0.7 BAR		1.4 BAR		2.8 BAR		4.1 BAR		5.5 BAR		6.9 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
2400	303	1.9	246	1.8								
3600	397	5.3	397	5.3	348	5.0	189	3.7				
4200	462	8.2	454	7.9	435	7.7	371	7.1	212	5.3		
5000	530	12.6	530	12.6	522	12.6	492	12.2	447	11.6	333	9.9

Hydraulically-Driven, Cast Iron and Stainless Steel

Series 9302C and 9302S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 1-1/4" NPT inlet, 1" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Impeller: Cast Iron models – Nylon; Stainless Steel models – Polypropylene
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet-HM Series
- Hydraulic ports on GM1 Series: 7/8" 14 UNF #10 SAE
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Max. motor psi: 3000 (bar: 207)
- Weight: 26 lbs./11.8 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9302CT-GM1	63	238	90	6.2	3	11.4	Open/Closed
9302C-HM1C	72	273	150	10.3	13	49.2	Open/Closed
9302C-HM2C	65	246	96	6.6	6	22.7	Open/Closed
9302C-HM4C	72	273	120	8.3	7	26.5	Open/Closed
9302ST-GM1	63	238	90	6.2	3	11.4	Open/Closed
9302S-HM1C	72	273	150	10.3	13	49.2	Open/Closed
9302S-HM2C	65	246	96	6.6	6	22.7	Open/Closed
9302S-HM4C	72	273	120	8.3	7	26.5	Open/Closed
3430-0332	Seal and o-ring repair kit						
3430-0589	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9302CT-GM1-B)

9302CT-GM1, 9302ST-GM1**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
2.0	51	48	39	21					
2.5	60	59	56	48	37	23			
3.0	63	63	62	61	58	50	39	25	0

9302CT-GM1, 9302ST-GM1**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.5 BAR	LPM at 4.2 BAR	LPM at 4.9 BAR	LPM at 5.6 BAR	LPM at 6.3 BAR
7.6	193	182	148	79					
9.5	227	223	212	182	140	87			
11.4	238	238	235	231	220	189	148	95	0

9302C-HM1C, 9302S-HM1C**U.S. Units**

Hyd. Flow GPM	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI	GPM at 140 PSI
11	72	72	71	65	56	45	29				
12	72	72	72	72	70	63	53	40			
13	72	72	72	72	72	71	68	63	56	48	35

9302C-HM1C, 9302S-HM1C**Metric Units**

Hyd. Flow LPM	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR	LPM at 9.7 BAR
41.6	273	273	269	246	212	170	110				
45.4	273	273	273	273	265	238	201	151			
49.2	273	273	273	273	273	269	257	238	212	182	132

9302C-HM2C, 9302S-HM2C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
4	54	49	42	34	19				
5	59	57	50	42	34	25	11		
6	64	63	60	52	44	36	27	18	9

9302C-HM2C, 9302S-HM2C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
15.1	204	185	159	129	72				
18.9	223	216	189	159	129	95	42		
22.7	244	238	227	197	167	136	102	68	34

9302C-HM4C, 9302S-HM4C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
6	65	63	59	51	41	29	12				
7	72	72	71	67	60	51	42	31	17		
8	72	72	72	72	70	64	57	50	42	32	16

9302C-HM4C, 9302S-HM4C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
22.7	246	238	223	193	155	110	45				
26.5	273	273	269	254	227	193	159	117	64		
30.3	273	273	273	273	265	242	216	189	159	121	61

Hydraulically-Driven, Cast Iron & Stainless Steel

Series 9303C and 9303S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- 220 x 200 universal flange available (U)
- Max. fluid temperature: 140°F/60°C
- Impeller: Cast Iron models – Nylon; (GTX available)
Stainless Steel models – Polypropylene
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available;
Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Max. motor psi: 3000 (bar: 207)
- Stainless steel models now available with universal flanges
- Weight: 26 lbs./11.8 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket
- ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9303C-HM1C	114	432]	130	9.0	13	49.2	Open/Closed
9303C-HM2C	97	367	95	6.5	6	22.7	Open/Closed
9303C-HM3C	125	473	98	6.8	24	90.8	Open/Closed
9303C-HM4C	115	435	93	6.4	7	26.5	Open/Closed
9303C-HM5C	147	556	145	10.0	16	60.6	Open/Closed
9303S-HM1C	114	432]	130	9.0	13	49.2	Open/Closed
9303S-HM2C	97	367	95	6.5	6	22.7	Open/Closed
9303S-HM3C	125	473	98	6.8	24	90.8	Open/Closed
9303S-HM4C	115	435	93	6.4	7	26.5	Open/Closed
9303S-HM5C	147	556	145	10.0	16	60.6	Open/Closed
3430-0332	Seal and o-ring repair kit						
3430-0589	Life Guard silicon carbide seal kit						

Universal Flange (220 x 200) - Add suffix "U" (i.e.: 9303C-HM3C-U)

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9303C-HM1C-B)

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

9303C-HM1C, 9303S-HM1C**U.S. Units**

Hyd. Flow GPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
11	104	101	96	90	82	71	60	47	31		
12	110	109	107	105	101	92	81	67	53	36	9
13	112	111	109	107	104	102	96	85	76	63	33

9303C-HM1C, 9303S-HM1C**Metric Units**

Hyd. Flow LPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
41.6	394	382	363	341	310	269	227	178	117		
45.4	416	413	405	397	382	348	307	254	201	136	34
49.2	424	420	413	405	394	386	363	322	288	238	125

9303C-HM2C, 9303S-HM2C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
4	70	60	45	25					
5	83	74	65	50	37	22	4		
6	94	86	80	72	62	50	37	22	7

9303C-HM2C, 9303S-HM2C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
15.1	265	227	170	95					
18.9	314	280	246	189	140	83	15		
22.7	356	326	303	273	235	189	140	83	26

9303C-HM3C, 9303S-HM3C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
15	100	92	83	69	47				
18	116	114	108	100	90	76	55	33	
20	125	123	120	114	107	96	85	71	50

9303C-HM3C, 9303S-HM3C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
56.8	379	348	314	261	178				
68.1	439	432	409	379	341	288	208	125	
75.7	473	466	454	432	405	363	322	269	189

9303C-HM4C, 9303S-HM4C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
5	84	76	66	52	34				
6	97	92	86	78	67	50	25		
7	110	104	98	91	82	69	55	38	14

9303C-HM4C, 9303S-HM4C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
18.9	318	288	250	197	129				
22.7	367	348	326	295	254	189	95		
26.5	416	394	371	344	310	261	208	144	53

9303C-HM5C, 9303S-HM5C**U.S. Units**

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI
13	113	105	97	86	73	59	44				
14	128	123	116	108	98	88	74	61	44		
15	135	132	126	119	110	100	89	77	66	50	20
16	145	142	137	132	126	117	107	95	83	70	55

9303C-HM5C, 9303S-HM5C**Metric Units**

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR
49.2	428	397	367	326	276	223	167				
53.0	485	466	439	409	371	333	280	231	167		
56.8	511	500	477	450	416	379	337	291	250	189	76
60.6	549	538	519	500	477	443	405	360	314	265	208

Hydraulically-Driven, Cast Iron & Stainless Steel, Self-Priming

Series 9303C-SP and 9303S-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron and 316 stainless steel for extended pump life
- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Impeller: Cast Iron models – Nylon; (GTX available)
Stainless Steel models – Polypropylene
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Max. motor psi: 3000 (bar: 207)
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models
 - Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Weight: 38 lbs./17.3 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9303C-HM1C-SP	122	462	130	9.0	13	49.2	Open/Closed
9303C-HM2C-SP	104	398	80	5.5	6	22.7	Open/Closed
9303C-HM3C-SP	120	454	95	6.5	24	90.8	Open/Closed
9303C-HM4C-SP	99	375	97	6.7	7	26.5	Open/Closed
9303C-HM5C-SP	140	530	140	9.7	16	60.5	Open/Closed
9303S-HM1C-SP	114	432	130	9.0	13	49.2	Open/Closed
9303S-HM2C-SP	97	361	95	6.5	6	22.7	Open/Closed
9303S-HM3C-SP	125	473	98	6.8	20	75.7	Open/Closed
9303S-HM4C-SP	115	435	93	6.4	7	26.5	Open/Closed
9303S-HM5C-SP	147	556	145	9.9	16	60.5	Open/Closed
3430-0589	Life Guard silicon carbide seal kit						
3430-0480SP	Self priming chamber kit						

Life Guard silicon carbide seal - Add suffix "B" [i.e.: 9303C-HM1C-SP-B]

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

9303C-HM1C-SP, 9303S-HM1C-SP**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
11	119	111	102	89	75	58	42	25			
12	122	120	113	104	94	81	69	55	39	24	
13	122	121	119	111	102	90	78	65	52	39	26

9303C-HM1C-SP, 9303S-HM1C-SP**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
41.6	450	420	386	337	284	220	159	95			
45.4	462	454	428	394	356	307	261	208	148	91	
49.2	462	458	450	420	386	341	295	246	197	148	98

9303C-HM2C-SP, 9303S-HM2C-SP**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
4	57	43	26				
5	80	67	53	39	23		
6	98	88	78	67	55	42	29

9303C-HM2C-SP, 9303S-HM2C-SP**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
15.1	216	163	98				
18.9	303	254	201	148	87		
22.7	371	333	295	254	208	159	110

9303C-HM3C-SP, 9303S-HM3C-SP**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI
15	104	90	74	55	23			
18	119	113	102	87	69	46		
20	120	119	114	106	91	74	55	33

9303C-HM3C-SP, 9303S-HM3C-SP**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR
56.8	394	341	280	208	87			
68.1	450	428	386	329	261	174		
75.7	454	450	432	401	344	280	208	125

9303C-HM4C-SP, 9303S-HM4C-SP**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI
5	72	60	46	30	15			
6	87	79	66	52	38	27	13	
7	95	91	84	71	58	42	30	16

9303C-HM4C-SP, 9303S-HM4C-SP**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR
18.9	273	227	174	114	57			
22.7	329	299	250	197	144	102	49	
26.5	360	344	318	269	220	159	114	61

9303C-HM5C-SP, 9303S-HM5C-SP**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
13	114	111	102	89	75	58	42	25			
14	118	117	113	104	94	81	69	55	39	24	
15	122	121	119	111	102	90	78	65	52	39	26

9303C-HM5C-SP, 9303S-HM5C-SP**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
49.2	432	420	386	337	284	220	159	95			
53.0	447	443	428	394	356	307	261	208	148	91	
56.8	462	458	450	420	386	341	295	246	197	148	98

Hydraulically-Driven, Polypropylene

Series 9000C-O



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Polypropylene
- Impeller: Polypropylene
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Max. motor psi: 3000 (bar: 207)
- Weight: 21 lbs./9.5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9303P-HM1C	110	416	130	9.0	13	49.2	Open/Closed
9303P-HM2C	82	310	95	6.5	6	22.7	Open/Closed
9303P-HM3C	110	416	93	6.4	24	90.8	Open/Closed
9303P-HM4C	82	310	84	5.3	7	26.5	Open/Closed
9303P-HM5C	113	427	120	8.3	16	60.5	Open/Closed
3430-0445	Seal and o-ring repair kit						
3430-0593	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9303P-HM1C-B)

9303P-HM1C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
11	93	90	86	80	74	67	59	49	36	18		
12	102	99	95	91	87	81	74	66	55	39	19	
13	109	106	103	99	94	88	82	74	65	54	42	28

9303P-HM1C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
41.6	352	341	326	303	280	254	223	185	136	68		
45.4	386	375	360	344	329	307	280	250	208	148	72	
49.2	413	401	390	375	356	333	310	280	246	204	159	106

9303P-HM2C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
5	65	56	46	38	20				
6	74	72	64	56	48	38	21		
7	80	75	70	62	57	48	40	28	9

9303P-HM2C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
18.9	246	212	174	144	76				
22.7	280	273	242	212	182	144	79		
26.5	303	284	265	235	216	182	151	106	34

9303P-HM3C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
15	85	80	70	60	44				
18	100	97	92	84	76	63	48		
20	109	108	104	99	90	82	71	60	39

9303P-HM3C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
56.8	322	303	265	227	167				
68.1	379	367	348	318	288	238	182		
75.7	413	409	394	375	341	310	269	227	148

9303P-HM4C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI
5	60	52	41	26				
6	70	66	58	48	37	21		
7	80	76	70	63	55	45	32	15

9303P-HM4C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR
18.9	227	197	155	98				
22.7	265	250	220	182	140	79		
26.5	303	288	265	238	208	170	121	57

9303P-HM5C**U.S. Units**

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
12	94	92	86	78	68	58	44	15				
13	100	98	94	88	79	70	60	48	25			
14	108	107	104	100	94	86	77	68	57	42		
15	113	112	110	106	100	93	86	78	68	56	40	

9303P-HM5C**Metric Units**

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
45.4	356	348	326	295	257	220	167	57			
49.2	379	371	356	333	299	265	227	182	95		
53.0	409	405	394	379	356	326	291	257	216	159	
56.8	428	424	416	401	379	352	326	295	257	212	151

Hydraulically-Driven, Cast Iron

Series 9305C



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Available in cast iron
- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 2" NPT inlet, 1-1/2" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Max. motor psi: 3000 (bar: 207)
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Weight: 48 lbs./21.8 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9305C-HM3C	182	689	156	10.8	19	72	Open/Closed
3430-0500	Seal and o-ring repair kit						
3430-0601	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9305C-HM3C-B)

9305C-HM3C

U.S. Units

Hyd. Flow GPM	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI	GPM at 140 PSI
17	173	164	148	127	97	70	44	14		
18	177	175	168	154	135	109	87	62	34	
19	180	179	177	167	151	134	115	95	72	44

9305C-HM3C

Metric Units

Hyd. Flow LPM	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR	LPM at 9.7 BAR
64.4	655	621	560	481	367	265	167	53		
68.1	670	662	636	583	511	413	329	235	129	
71.9	685	678	670	632	572	507	435	360	273	167

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Hydraulically-Driven, Cast Iron, Self-Priming

Series 9305C-SP and 9305C-BSP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Available in cast iron
- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 2" NPT inlet, 2" NPT outlet (Model 9305C-HM3C-SP), 2" BSP inlet, 2" BSP outlet (Model 9305C-HM3C-BSP)
- Max. fluid temperature: 140°F/60°C
- Impeller: Nylon
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Max. motor psi: 3000 (bar: 207)
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Weight: 59 lbs./26.8 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd LPM	Hydraulic Selection System
9305C-HM3C-SP	155	587	143	9.9	19	72	Open/Closed
9305C-HM3C-BSP	155	587	143	9.9	19	72	Open/Closed
3430-0601	Life Guard silicon carbide seal kit						
3430-0481SP	Self priming chamber kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9305C-HM3C-B-SP)

9305C-HM3C-SP, 9305C-HM3C-BSP

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI
17	148	145	135	118	100	81	60	37	17		
18	150	149	147	138	120	102	81	60	38	14	
19	153	152	150	147	140	120	104	85	66	45	28

9305C-HM3C-SP, 9305C-HM3C-BSP

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR
64.4	560	549	511	447	379	307	227	140	64		
68.1	568	564	556	522	454	386	307	227	144	53	
71.9	579	575	568	556	553	454	394	322	250	170	106

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Hydraulically-Driven, Cast Iron & Stainless Steel

Series 9306C and 9306S



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 2" NPT inlet, 1-1/2" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Available in cast iron and 316 stainless steel for extended pump life
- Impeller: Nylon (cast iron models); polypropylene (stainless steel models); (GTX available)
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Max. motor psi: 3000 (bar: 207)
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- 220 x 220 (U) Universal flange available
- Weight: 33 lbs./15 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9306C-HM1C*	207	784	127	8.8	13	49.2	Open/Closed
9306C-HM3C*	214	810	128	8.8	24	90.8	Open/Closed
9306C-HM5C*	212	803	140	9.6	17	64.4	Open/Closed
9306S-HM1C	207	784	127	8.8	13	49.2	Open/Closed
9306S-HM3C	214	810	128	8.8	24	90.8	Open/Closed
9306S-HM5C	212	803	140	9.6	17	64.4	Open/Closed
3430-0332	Seal and o-ring repair kit						
3430-0589	Life Guard silicon carbide seal kit						

*Universal Flange (220 x 220) - Add Suffix "U" (i.e.: 9306C-HM3C-U) - Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9306C-HM3C-B)

9306C-HM1C, 9306S-HM1C, 9306C-HM1C-U, 9306S-HM1C-U

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
11	207	200	186	155	122	88	44			
12	207	207	196	179	149	119	88	53		
13	207	207	207	195	171	144	115	85	53	20

9306C-HM1C, 9306S-HM1C, 9306C-HM1C-U, 9306S-HM1C-U

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
41.6	784	757	704	587	462	333	167			
45.4	784	784	742	678	564	450	333	201		
49.2	784	784	784	738	647	545	435	322	201	76

9306C-HM3C, 9306S-HM3C, 9306C-HM3C-U, 9306S-HM3C-U

U.S. Units

Hyd. Flow GPM	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
18	190	179	159	90					
20	214	203	199	181	139	49			
22	214	214	214	210	198	176	127	16	
24	214	214	214	214	214	210	190	154	101

9306C-HM3C, 9306S-HM3C, 9306C-HM3C-U, 9306S-HM3C-U

Metric Units

Hyd. Flow LPM	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
68.1	719	678	602	341					
75.7	810	768	753	685	526	185			
83.3	810	810	810	795	750	666	481	61	
90.8	810	810	810	810	810	795	719	583	382

9306C-HM5C, 9306S-HM5C, 9306C-HM5C-U, 9306S-HM5C-U

U.S. Units

Hyd. Flow GPM	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI
15	212	212	212	187	150	114	65	19		
16	212	212	212	212	189	158	125	87	42	
17	212	212	212	212	212	189	162	133	102	58

9306C-HM5C, 9306S-HM5C, 9306C-HM5C-U, 9306S-HM5C-U

Metric Units

Hyd. Flow LPM	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR
56.8	803	803	803	708	568	432	246	72		
60.6	803	803	803	803	715	598	473	329	159	
64.4	803	803	803	803	803	715	613	503	386	220

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypor® is a registered trademark of Pentair.

Hydraulically-Driven, Cast Iron & Stainless Steel Flanged

Series 9306C and 9306S - 300x220 Flanged Pumps



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port Sizes: 300 x 220 (3U) Universal flange
- Max. fluid temperature: 140°F/60°C
- Available in cast iron and 316 stainless steel for extended pump life
- Impeller: Nylon (cast iron models); polypropylene (stainless steel models); (GTX available)
- Motor: internal gear gerotor
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet
- Max. motor psi: 3000 (bar: 207)
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard silicon carbide (B) available; Stainless Steel models – Life Guard silicon carbide
- Life Guard seals are the industry standard on OEM equipment
- Hydraulic motor seal: double-lip Teflon® and case drain available
- Weight: 33 lbs./15 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9306C-HM1C-3U	283	1071	127	8.8	13	49.2	Open/Closed
9306C-HM3C-3U	322	1219	128	8.8	24	90.3	Open/Closed
9306C-HM5C-3U	312	1181	140	9.6	17	64.4	Open/Closed
9306S-HM1C-3U	283	1071	127	8.8	13	49.2	Open/Closed
9306S-HM3C-3U	322	1219	128	8.8	24	90.3	Open/Closed
9306S-HM5C-3U	312	1181	140	9.6	17	64.4	Open/Closed
3430-0332	Seal and o-ring repair kit						
3430-0589	Life Guard silicon carbide seal kit						

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9306C-HM1C-B3U)

9306C-HM1C-3U, 9306S-HM1C-3U

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
11	255	225	190	155	122	88	44	5	19	
12	271	242	211	179	149	119	88	53	85	24
13	283	258	226	199	171	144	115			

9306C-HM1C-3U, 9306S-HM1C-3U

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
41.6	965	852	719	587	462	333	167	19		
45.4	1026	916	799	678	564	450	333	201	72	
49.2	1071		856	753	647	545	435	322	201	91

9306C-HM3C-3U, 9306S-HM3C-3U

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
18	285	256	213	165	90					
20	308	297	268	233	192	139	49			
22	312	312	308	288	255	219	176	127	16	
24	322	322	320	316	298	265	231	196	154	101

9306C-HM3C-3U, 9306S-HM3C-3U

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
68.1	1079	969	806	624	341					
75.7	1166	1124	1014	882	727	526	185			
83.3	1181	1181	1166	1090	965	829	666	481	61	
90.8	1219	1219	1211	1196	1128	1003	874	742	583	382

9306C-HM5C-3U, 9306S-HM5C-3U

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI
15	285	269	242	212	182	149	112	68	19		
16	308	291	269	242	212	179	149	115	78	37	
17	312	312	297	270	242	214	187	154	122	82	44

9306C-HM5C-3U, 9306S-HM5C-3U

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 8.9 BAR
56.8	1079	1018	916	802	689	564	424	257	72		
60.6	1166	1101	1018	916	802	677	564	435	307	159	
64.4	1181	1181	1124	1022	916	810	708	583	462	310	167

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Hydraulically-Driven, Cast Iron

Series 9307C



For Flanged Connections You Will Also Need:

☐ Universal Flange Gasket ☐ Universal Flange Clamp

See page 214 for details

Features

- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 3" NPT inlet, 2" NPT outlet
- 300 x 220 universal flange available (U)
- Max. fluid temperature: 140°F/60°C
- Impeller: stainless steel
- Motor: external gear
- Hydraulic ports: -10 SAE inlet and -12 SAE outlet
- Max. motor psi: 3000 (bar: 207)
- Pump seals: Life Guard silicon carbide standard
- Life Guard seals are the industry standard on OEM equipment
- Weight: 86 lbs./39 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9307C-GM10	370	1400	135	9.3	20	75.7	Open/Closed
9307C-GM12	370	1400	135	9.3	23	87.1	Open/Closed
3430-0604	Life Guard silicon carbide seal kit						

*Universal Flange (300 x 220) - Add Suffix "U" (i.e.: 9307C-GM10-U)

9307C-GM10, 9307C-GM10-U

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
16	282	253	219	168	73				
17	318	288	258	222	174	95			
18	346	318	291	258	222	166	90		
19	361	361	338	311	281	250	201	137	
20	370	370	351	328	301	275	241	184	106

9307C-GM10, 9307C-GM10-U

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
60.6	1067	958	829	636	276				
64.4	1204	1090	977	840	659	360			
68.1	1310	1204	1101	977	840	628	341		
71.9	1366	1366	1279	1177	1064	946	761	519	
75.7	1400	1400	1329	1241	1139	1041	912	696	401

9307C-GM12, 9307C-GM12-U

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
16	222	180	115						
17	246	212	166	92					
18	274	245	209	157	58				
19	302	272	242	203	150				
20	326	298	271	240	196	142			
21	345	324	297	269	238	194	140		
22		345	322	297	270	236	193	138	
23		370	344	323	299	273	235	194	137

9307C-GM12, 9307C-GM12-U

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
60.6	840	681	435						
64.4	931	802	628	348					
68.1	1037	927	791	594	220				
71.9	1143	1030	916	768	568				
75.7	1234	1128	1026	908	742	537			
79.5	1306	1226	1124	1018	901	734	530		
83.3		1306	1219	1124	1022	893	731	522	
87.1		1400	1302	1223	1132	1033	889	734	519

Hydraulically-Driven, Cast Iron with ForceField Technology

Series 9307CWS



- ForceField seal technology to protect your pump against today's harshest application environments:
 - Eliminates dry run failures
 - Eliminates chemical and fertilizer bonding failures
 - Prevents costly in-season downtime
 - Maintenance-free operation
 - Self-regulating chamber designed to provide pressure when needed and safe serviceability when it is not needed
 - Direct drop-in for current 9307 designs
- Components designed for today's high volume liquid fertilizer application on large capacity sprayers:
 - Hydraulic motor includes a case drain for maximum motor life
 - 316 stainless steel impeller
 - Two-piece shaft design includes 416 stainless steel wet end and 8620 hardened steel drive end
 - Bearings designed to handle continuous high volume pump loading
- Capable of flows over 370 GPM (1400 LPM) at 40 PSI (2.8 BAR)
- 300 universal flange inlet x 220 universal flange outlet
- One-year warranty that includes pump, motor and seals

For Flanged Connections

You Will Also Need:

☐ Universal Flange Gasket

☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd. GPM	Max Hyd. LPM	Hydraulic Selection System
9307CWS-GM12	370	1400	135	9.8	23	87.1	Open/Closed

9307CWS-GM12: Performance in water

U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
16	222	180	115						
17	246	212	166	92					
18	274	245	209	157	58				
19	302	272	242	203	150				
20	326	298	271	240	196	142			
21	345	324	297	269	238	194	140		
22	345	345	322	297	270	236	193	138	
23	370	370	344	323	299	273	235	194	137

9307CWS-GM12: Performance in water

Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR
60.6	840	681	435						
64.4	931	802	628	348					
68.1	1037	927	791	594	220				
71.9	1143	1030	916	768	568				
75.7	1234	1128	1026	908	742	537			
79.5	1306	1226	1124	1018	901	734	530		
83.3	1306	1306	1219	1124	1022	893	731	522	
87.1	1400	1400	1302	1223	1132	1033	889	734	519

9307CWS-GM12: Performance in 28% liquid fertilizer

U.S. Units

Hyd. Flow GPM	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI	GPM at 140 PSI
16	228	204	159	100							
17	234	219	190	147	49						
18	247	247	223	194	146	49					
19	255	255	239	221	191	151	55				
20	260	260	252	240	220	191	150	63			
21	260	260	254	248	237	224	196	159	87		
22	260	260	254	248	240	230	214	194	159	101	
23	260	260	254	249	249	242	237	227	211	174	133

9307CWS-GM12: Performance in 28% liquid fertilizer

Metric Units

Hyd. Flow LPM	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR	LPM at 9.7 BAR
60.6	863	772	602	379	-						
64.4	886	829	719	556	185						
68.1	935	935	844	734	553	185					
71.9	965	965	905	836	723	572	208				
75.7	984	984	954	908	833	723	568	238			
79.5	984	984	961	939	897	848	742	602	329		
83.3	984	984	961	939	908	871	810	734	602	382	
87.1	984	984	961	942	942	916	897	859	799	659	503

Hydraulically-Driven, Cast Iron

Series 9308C



Features

- 5" ANSI-flanged inlet x 4" ANSI-flanged outlet
- 316 stainless steel impeller for superior corrosion resistance
- 9308 versions include a two-piece shaft design with a 416 stainless steel wet end and hardened 8620 drive end for extended life
- Life Guard silicon carbide seal for premium abrasion resistance and dry-run protection
- Life Guard seals are the industry standard on OEM equipment

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd GPM	Max Hyd LPM	Hydraulic Selection System
9308C-PM15	900	3407	58	4.0	16	60.6	Open/Closed
9308C-GM25	1078	4081	72	5.0	28	106	Open/Closed
9308CX	Pump head only						
3430-0604	Life Guard silicon carbide seal kit						

9308C-PM15

U.S. Units

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI
8	430				
12	656	656	416		
16	900	900	900	778	607

9308C-PM15

Metric Units

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.5 BAR
30.3	1628				
45.7	2483	2483	1575		
60.6	3407	3407	3407	2945	2298

9308C-GM25

U.S. Units

Hyd. Flow GPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
17	520					
23	828	828	667	296		
28	1078	1078	965	845	667	380

9308C-GM25

Metric Units

Hyd. Flow LPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.5 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
64.3	1968					
87.1	3134	3134	2525	1120		
106	4081	4081	3653	3199	2525	1438

Belt-Driven, Cast Iron, Self-Priming

Series 9400C-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Drive: 12-groove belt
- Spring-loaded belt tensioner
- Stainless steel wear ring
- Stainless steel pump shaft, standard
- Port sizes: 1-1/2" NPT inlet, 1-1/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Cast iron
- Impeller: Nylon
- Pump shaft rotation: Counter clockwise when looking at shaft end
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 57 lbs./25.9 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output
9403C-540-SP	120	454	99	6.8	600	1-3/8" female, 6 spline shaft
9403C-540Q-SP	120	454	99	6.8	600	1-3/8" 6 spline quick coupler
9403C-540S-SP	120	454	99	6.8	600	1" [25.4 mm] solid shaft
9403C-1000-SP	120	454	99	6.8	1000	1-3/8" female, 21-spline shaft
9403C-1000L-SP	120	454	99	6.8	1000	1-3/4" female, 20-spline shaft
3430-0332	Seal kit standard					
3430-0589	Life Guard silicon carbide seal kit					
3430-0480SP	Self priming chamber kit					

Life Guard silicon carbide seal - Add suffix "B" [i.e.: 9403C-540-SP-B]

9403C-540-SP

U.S. Units

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
500	114	113	101	83	60	27			
540	120	119	116	102	85	62	32		
600	120	120	120	119	110	97	78	54	24

9403C-540-SP

Metric Units

RPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
500	432	428	382	314	227	102			
540	454	450	439	386	322	235	121		
600	454	454	454	450	416	367	295	204	91

9403C-1000-SP

U.S. Units

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
800	111	109	94	74	47	21			
900	120	119	116	102	85	62	32		
1000	120	120	120	119	110	97	78	54	24

9403C-1000-SP

Metric Units

RPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
800	420	413	356	280	178	79			
900	454	450	439	386	322	235	121		
1000	454	454	454	450	416	367	295	204	91

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Belt-Driven, Cast Iron, Polypropylene & Stainless Steel

Series 9400 Belt Drive



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard
- Extend pump life with Stainless Steel
 - Fact: Chemical corrosion, pump cavitation, and abrasive wear are key factors in pump life
 - 316 Stainless Steel pumps provide superior chemical corrosion resistance, while maintaining material strength to prolong the life against abrasive wear
 - 316 Stainless Steel resists cavitation pitting of pumps, extending the wear life
 - Drop in replacements for cast iron pumps

Features

- Available in cast iron, polypropylene and 316 stainless steel for extended pump life
- Drive: 12-groove belt
- Spring-loaded belt tensioner
- Stainless steel wear ring
- Stainless steel pump shaft, standard
- Port sizes: 9402 models – 1-1/4" NPT inlet, 1" NPT outlet; 9403 models – 1-1/2" NPT inlet, 1-1/4" NPT outlet
- 220 x 200 universal flange available (U)
- Max. fluid temperature: 140°F/60°C
- Impeller: Cast Iron models – Nylon; Poly & Stainless Steel models – Polypropylene
- Pump shaft rotation: Counter clockwise when looking at shaft end
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide (B) available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 40-45 lbs./18.2-20.5 kg

For Flanged Connections You Will Also Need:

- ☐ Universal Flange Gasket ☐ Universal Flange Clamp

See page 214 for details

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	PTO Output
9402C-540	76	283	95	6.5	600	1-3/8" female, 6-spline shaft
9402C-540Q	76	283	95	6.5	600	1-3/8" 6-spline quick coupler
9402C-540S	76	283	95	6.5	600	1" (25.4 mm) solid shaft
9402C-1000	76	283	95	6.5	1000	1-3/8" female, 21-spline shaft
9402C-1000L	76	283	95	6.5	1000	1-3/4" female, 20-spline shaft
9402C-1000S	76	283	95	6.5	1000	1" (25.4 mm) solid shaft
9403C-540+	140	530	104	7.2	600	1-3/8" female, 6-spline shaft
9403C-540Q+	140	530	104	7.2	600	1-3/8" 6-spline quick coupler
9403C-540S+	140	530	104	7.2	600	1" (25.4 mm) solid shaft
9403C-1000+	140	530	104	7.2	1000	1-3/8" female, 21-spline shaft
9403C-1000L+	140	530	104	7.2	1000	1-3/4" female, 20-spline shaft
9403C-1000-MTZ	164	617	113	7.8	1000	38 mm female, 8-spline shaft
9403C-1000S+	140	530	104	7.2	1000	1" (25.4 mm) solid shaft
9403P-540	91	344	83	5.7	600	1-3/8" female, 6-spline shaft
9403P-540Q	91	344	83	5.7	600	1-3/8" 6-spline quick coupler
9403P-540S	91	344	83	5.7	600	1" (25.4 mm) solid shaft
9403P-1000	86	326	83	5.7	1000	1-3/8" female, 21-spline shaft
9403P-1000L	86	326	83	5.7	1000	1-3/4" female, 20-spline shaft
9403P-1000S	86	326	83	5.7	1000	1" (25.4 mm) solid shaft
9403S-540	140	530	104	7.2	540	1-3/8" female, 6-spline shaft
9403S-540Q	140	530	104	7.2	540	1-3/8" 6-spline quick coupler
9403S-540S	140	530	104	7.2	540	1" (25.4 mm) solid shaft
9403S-1000	140	530	104	7.2	1000	1-3/8" female, 21-spline shaft
9403S-1000L	140	530	104	7.2	1000	1-3/4" female, 20-spline shaft
9403S-1000S	140	530	104	7.2	1000	1" (25.4 mm) solid shaft
3430-0332	Seal and o-ring repair kit					
3430-0476	Seal, o-ring, belt and gasket repair kit for 540 rpm drives					
3430-0477	Seal, o-ring, belt and gasket repair kit for 1000 rpm drives					
3430-0589	Life Guard silicon carbide seal kit					
3430-0333	Seal and o-ring repair kit (polypropylene)					
3430-0478	Seal, o-ring, belt and gasket repair kit for 540 rpm drives (polypropylene)					
3430-0479	Seal, o-ring, belt and gasket repair kit for 1000 rpm drives (polypropylene)					
3430-0590	Life Guard silicon carbide seal kit (polypropylene)					

†Universal Flange (220 x 200) - Add Suffix "U" (i.e.: 9403C-1000S-U)

Life Guard silicon carbide seal - Add suffix "B" (i.e.: 9402C-540-B)

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

9402C-540**U.S. Units**

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
450	61	58	50	36				
500	67	66	62	56	42			
540	71	71	70	65	58	44		
600	76	76	76	75	73	66	56	42

9402C-540**Metric Units**

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
450	231	220	189	136				
500	254	250	235	212	159			
540	269	269	265	246	220	167		
600	288	288	288	284	276	250	212	159

9402C-1000**U.S. Units**

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI
800	68	67	64	57	41				
900	74	74	73	71	64	54	41		
1000	76	76	76	76	76	72	65	56	43

9402C-1000**Metric Units**

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR
800	257	254	242	216	155				
900	280	280	276	269	242	204	155		
1000	288	288	288	288	288	273	246	212	163

9403C-540, 9403S-540**U.S. Units**

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI
450	107	99	86	50					
500	121	116	106	93	76	42			
540	129	127	120	111	98	80	50		
600	140	138	135	130	121	112	94	73	40

9403C-540, 9403S-540**Metric Units**

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR
450	405	375	326	189					
500	458	439	401	352	288	159			
540	488	481	454	420	371	303	189		
600	530	522	511	492	458	424	356	276	151

9403C-1000, 9403S-1000**U.S. Units**

RPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI
800	115	106	96	80	56				
900	129	127	120	111	98	80	50		
1000	140	139	137	133	128	119	100	76	46

9403C-1000, 9403S-1000**Metric Units**

RPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR
800	435	401	363	303	212				
900	488	481	454	420	371	303	189		
1000	530	526	519	503	485	450	379	288	174

9403C-1000-MTZ**U.S. Units**

RPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI
800	136	132	123	112	98	70	45				
900	150	149	145	135	125	115	97	72	35		
1000	163	162	160	155	150	140	130	115	95	75	45

9403C-1000-MTZ**Metric Units**

RPM	LPM at 0.7 Bar	LPM at 1.4 Bar	LPM at 2.1 Bar	LPM at 2.8 Bar	LPM at 3.4 Bar	LPM at 4.1 Bar	LPM at 4.8 Bar	LPM at 5.5 Bar	LPM at 6.2 Bar	LPM at 6.9 Bar	LPM at 7.6 Bar
800	515	500	466	424	371	265	170				
900	568	564	549	511	473	435	367	273	132		
1000	617	613	606	587	568	530	492	435	360	284	170

Gas Engine-Driven ProwerPro, Cast Iron

Models 1521C-65, 1521C-65M



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- PowerPro Engine (EPA & CARB certified)
- Closed coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 65 lbs./29.4kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1521C-65	110	416	80	5.5	1-1/2" x 1-1/4"	PowerPro 6.5 hp
1521C-65M	Same as 1521C-65 without mounting base					
1538	1-1/2" x 1-1/4" centrifugal pump. DOES NOT include Engine. (Must use 5/8" threaded shaft engine)					
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

1521C-65, 1521C-65M

U.S. Units

GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
110	106	96	88	80	60	30

1521C-65, 1521C-65M

Metric Units

LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
416	401	363	333	303	227	114

Gas Engine-Driven ProwerPro, Cast Iron

Models 1552C-130, 1522C-130E



Features

- PowerPro Engine (EPA & CARB certified)
- Closed coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard
- Weight: 110 lbs./50kg

Order Information

Model Number	Max GPM	Max (LPM)	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1552C-130	170	644	150	10.3	2" x 1-1/2"	PowerPro 13 hp
1552C-130E	170	644	150	10.3	2" x 1-1/2"	PowerPro 13 hp w/ electric start
1551	2" x 1-1/2" centrifugal pump kit. DOES NOT include engine. (Must use 1" threaded shaft engine)					
3430-0464	Seal and o-ring repair kit					

1552C-130, 1552C-130E

U.S. Units

GPM at 20 PSI	GPM at 40 PSI	GPM at 60 PSI	GPM at 80 PSI	GPM at 100 PSI	GPM at 120 PSI	GPM at 140 PSI
170	166	148	120	92	65	35

1552C-130, 1552C-130E

Metric Units

LPM at 1.4 BAR	LPM at 2.8 BAR	LPM at 4.1 BAR	LPM at 5.5 BAR	LPM at 6.9 BAR	LPM at 8.3 BAR	LPM at 9.7 BAR
644	628	560	454	348	246	132

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Gas Engine-Driven PowerPro, Cast Iron, Self-Priming

Models 1522C-65SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- PowerPro Engine (EPA & CARB certified)
- Closed coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide available
- Life Guard seals are the industry standard on OEM equipment
- Fill Port 3/4" NPT

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfg. & HP
1522C-65SP	130	492	65	4.5	2" x 2"	PowerPro 6.5 hp
1538-SP*	2" x 2" centrifugal pump kit, does not include engine.					
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

* Must use threaded-shaft engine.

1522C-65SP

U.S. Units

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 65 PSI
130	121	108	93	85	76	56	34	0

1522C-65SP

Metric Units

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.5 BAR
492	458	409	352	322	288	212	129	0

Gas Engine-Driven PowerPro, Cast Iron, Self-Priming

Models 1552C-130SP, 1552C-130ESP



Features

- PowerPro Engine (EPA & CARB certified)
- Closed coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard
- Fill Port 1" NPT

Order Information

Model Number	Max GPM	Max LPM	Max BAR	Max BAR	Port Size	Engine Mfg. & HP
1552C-130SP	163	617	147	10.1	2" x 2"	PowerPro 13 hp
1552C-130ESP	163	617	147	10.1	2" x 2"	PowerPro 13 hp w/ electric start
1551-SP*	2" x 2" centrifugal pump kit. Does not include engine.					
1551-BSP*	2" x 2" centrifugal pump kit. (BSP threads) Does not include engine.					
3430-0464	Seal and o-ring repair kit					

* Must use threaded-shaft engine.

1552C-130SP, 1552C-130ESP

U.S. Units

GPM at 0 PSI	GPM at 20 PSI	GPM at 40 PSI	GPM at 60 PSI	GPM at 80 PSI	GPM at 100 PSI	GPM at 120 PSI	GPM at 140 PSI	GPM at 147 PSI
163	161	148	122	100	75	51	27	0

1552C-130SP, 1552C-130ESP

Metric Units

LPM at 0 BAR	LPM at 1.4 BAR	LPM at 12.8 BAR	LPM at 4.1 BAR	LPM at 5.5 BAR	LPM at 6.9 BAR	LPM at 8.3 BAR	LPM at 9.7 BAR	LPM at 10.1 BAR
617	609	560	462	379	284	193	102	0

Gas Engine-Driven, Cast Iron

Models 1536 and 1539



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Briggs & Stratton® engine (EPA & CARB certified)
- Close-coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 53 lbs./24.1 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfg. & HP
1536	110	416	75	5.2	1-1/2" x 1-1/4"	Briggs & Stratton® 5.5 hp
1539	Same as model 1536 without mounting base					
1538*	1-1/2" x 1-1/4" centrifugal pump kit. DOES NOT include engine.					
3430-0332	Seal and o-ring repair kit					
3430-0589	Life Guard silicon carbide seal kit					

* Must use threaded shaft engine.

1536, 1539

U.S. Units

GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
110	106	96	87	73	50

1536, 1539

Metric Units

LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
416	401	363	329	276	189

Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation.

Gas Engine-Driven, Cast Iron

Models 1537 and 1540



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Honda® engine (EPA & CARB certified)
- Close-coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide available
- Life Guard seals are the industry standard on OEM equipment
- Weight: 53 lbs./24.1 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfg. & HP
1537	110	416	80	5.5	1-1/2" x 1-1/4"	Honda® 5.5 hp
1540	Same as model 1537 without mounting base					
1538*	1-1/2" x 1-1/4" centrifugal pump kit. DOES NOT include engine.					
3430-0332	Seal and o-ring repair kit					
3420-0589	Life Guard silicon carbide seal kit					

* Must use threaded shaft engine.

1537, 1540

U.S. Units

GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI
110	106	96	88	80	60	30

1537, 1540

Metric Units

LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
416	401	363	333	303	227	114

Viton® is a registered trademark of DuPont.

Gas Engine-Driven, Cast Iron, Self-Priming

Models 1536-SP and 1539-SP



Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Briggs & Stratton® engine (EPA & CARB certified)
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide available
- Life Guard seals are the industry standard on OEM equipment
- Fill Port 3/4" NPT
- Weight: 72 lbs./32.7 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfgr. & HP
1536-SP	100	379	65	4.5	2" x 2"	Briggs & Stratton® 5.5 hp
1539-SP	Same as model 1536-SP without mounting base					
1538-SP*	2" x 2" centrifugal pump kit. DOES NOT include engine.					
3430-0332	Seal kit standard					
3430-0482SP	Self-primer conversion kit					
3430-0589	Life Guard silicon carbide seal kit					

* Must use threaded shaft engine.

1536-SP, 1539-SP

U.S. Units

GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
92	81	67	55	40	15

1536-SP, 1539-SP


Metric Units

LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
348	307	254	208	151	57

Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation.

Gas Engine-Driven, Cast Iron, Self-Priming

Models 1537-SP and 1540-SP

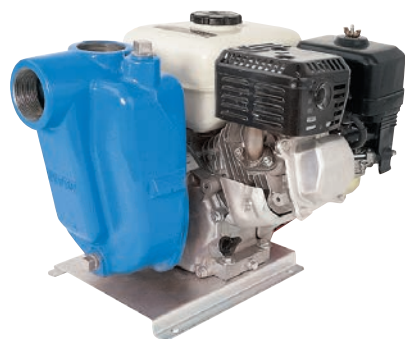

Upgrade Options:

- Increase dry-run and abrasive resistance with Life Guard Seals
 - Life Guard seals are the OEM standard

Features

- Honda® engine (EPA & CARB certified)
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Impeller: Nylon
- Pump seals: Viton/ceramic standard; Life Guard silicon carbide available
- Life Guard seals are the industry standard on OEM equipment
- Fill Port 3/4" NPT
- Weight: 78 lbs./35 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfgr. & HP
1537-SP	106	401	75	5.2	2" x 2"	Honda® 5.5 hp
1540-SP	Same as model 1537-SP without mounting base					
1538-SP*	2" x 2" centrifugal pump kit. DOES NOT include engine.					
3430-0332	Seal kit standard					
3430-0482SP	Self-primer conversion kit					
3430-0589	Life Guard silicon carbide seal kit					

* Must use threaded shaft engine.

1537-SP, 1540-SP

U.S. Units

GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
98	87	73	60	44	21

1537-SP, 1540-SP

Metric Units

LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
371	329	276	227	167	79

Viton® is a registered trademark of DuPont.

Honda® is a registered trademark of Honda Motor Co., Ltd.
Hypro is a registered trademark of Pentair.

Gas Engine-Driven, Cast Iron

Series 1550



- Honda® engine (EPA & CARB certified)
- Close-coupled, gas engine-driven
- Max. fluid temperature: 140°F/60°C
- Housing: cast iron
- Pump seals: Viton/ceramic
- Impeller: Nylon
- Weight: 105 lbs./47.7 kg;
SP and BSP: 125 lbs./56.8 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP	Self Priming
1550	150	568	140	9.7	2" x 1-1/2"	Honda® 9 hp	No
1550-SP	155	587	135	9.3	2" x 2"	Honda® 9 hp	Yes
1550-BSP†	155	587	135	9.3	2" x 2"	Honda® 9 hp	Yes
1551*	2" x 1-1/2" centrifugal pump kit. DOES NOT include engine.						
1551-SP*	2" x 2" centrifugal pump kit. DOES NOT include engine.						
3430-0464	Seal, o-ring, and gasket repair kit						

* Must use threaded shaft engine. † BSP Threads

1550

U.S. Units

GPM at 20 PSI	GPM at 40 PSI	GPM at 60 PSI	GPM at 80 PSI	GPM at 100 PSI	GPM at 120 PSI	GPM at 140 PSI
145	130	107	87	69	45	16

1550-SP, 1550-BSP

U.S. Units

GPM at 10 PSI	GPM at 20 PSI	GPM at 40 PSI	GPM at 60 PSI	GPM at 80 PSI	GPM at 100 PSI	GPM at 120 PSI
145	141	118	93	71	49	28

1550

Metric Units

LPM at 1.4 BAR	LPM at 2.8 BAR	LPM at 4.1 BAR	LPM at 5.5 BAR	LPM at 6.9 BAR	LPM at 8.3 BAR	LPM at 9.7 BAR
549	492	405	329	261	170	61

1550-SP, 1550-BSP

Metric Units

LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR
549	534	447	352	269	185	106

Honda® is a registered trademark of Honda Motor Co., Ltd.
Hypro is a registered trademark of Pentair.

Life Guard Silicon Carbide Pump Seals

Specially designed to prolong seal life



The drawing to the right represents a cross sectional view of a Life Guard Premium Silicon Carbide Seal (top) and a standard seal (bottom). There are three key differences shown in the drawing: material, mating rings and balance.

Material:

The Life Guard seal utilizes silicon carbide (SiC) for its seal surfaces (primary ring and mating ring). This is more abrasion resistant than the carbon graphite and ceramic used in standard seals. SiC also runs cooler if the pump is run dry, improving the life of the seal.

Mating Rings:


The O-ring style of the Life Guard seal mating ring allows heat to dissipate into the pump casting. This keeps the seal at a lower temperature and dramatically improves the chances of the seal to survive a dry-run episode.

Balance:


The bellows and primary ring of the Life Guard seal are pressure balanced. This results in cooler operation at higher pressures.

Life Guard silicon carbide seals are available in the following models: Pedestal mount, Flange mount, Clutch-driven, Hydraulically-driven, Belt-driven, and Gas Engine-driven.


Side by Side Comparison

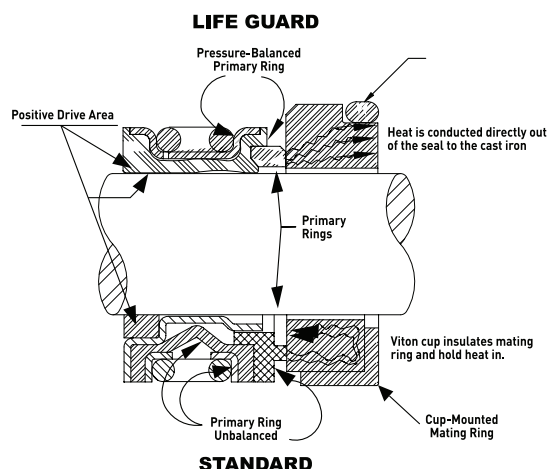

LIFE TEST IN ABRASIVE SOLUTION

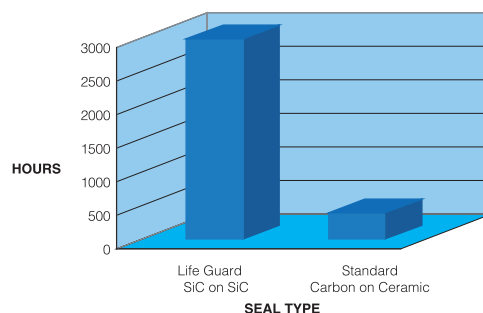

DRY-RUN SURVIVABILITY (5 MINUTES/CYCLE)

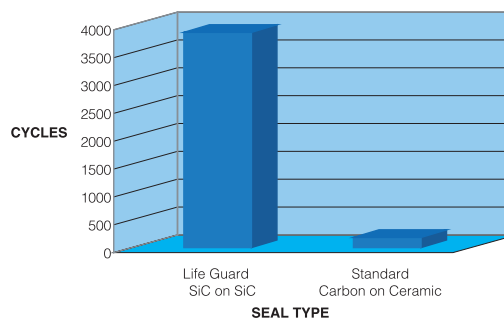

Life Guard Silicon Carbide Seal Kits

Part Number	Pump Series/Model #	Size		Description	Estimated Weight Ea.
		US	Metric		
3430-0589	9200, 9300 and 9400 Cast and Stainless	5/8"	15.9 mm	Mechanical seal and o-ring	4 oz./114 g
3430-0593	9303P	5/8"	15.9 mm	Mechanical seal, o-ring, gasket and washer for under acorn nut	4 oz./114 g
3430-0601	9305C and 9305C-SP	5/8"	15.9 mm	Mechanical seal and o-ring	4 oz./114 g
3430-0590	All Poly Models	3/4"	19 mm	Mechanical seal, o-ring, gasket and washer for under acorn nut	4 oz./114 g
3430-0604	9307 Series	1-3/8"	35 mm	Mechanical seal, o-ring and gasket	4 oz./114 g
3430-0646	9205 Models	3/4"	19 mm	Mechanical seal and o-ring	4 oz./114 g
3430-0591	9000C-O and 9000C-O-SP	3/4"	19 mm	Mechanical seal and o-ring	4 oz./114 g

Self-Priming Adaptor (SPA)

Provides Fast Self-Priming for Closed Impeller Centrifugal Pumps




- Creates self-priming capability for all standard centrifugal pump models
- Increases priming efficiency over open impeller transfer pumps and self-priming centrifugal pumps
- Allows the use of a single, high efficiency pump for both tank filling and spraying
- Constructed out of 304 stainless steel for corrosion resistance
- Protects the pump's mechanical seal from dry-run during priming operations for on-board loading
- Guards against unexpected dry-run conditions during spraying application, if system were to function automatically
- Allows centrifugal pumps to be mounted in tight-fitting configurations while maintaining priming and flow performance capabilities
- SPA can be mounted in nearby remote location up to 10 ft (3 m) from pump

Order Information

Model Number	Description
1530-0024S	2" NPT Self-Priming Adaptor
1530-0028S	2" NPT High Volume Self-Priming Adaptor
3430-0700	Mounting Kit

Self-Priming Adaptor Configuration

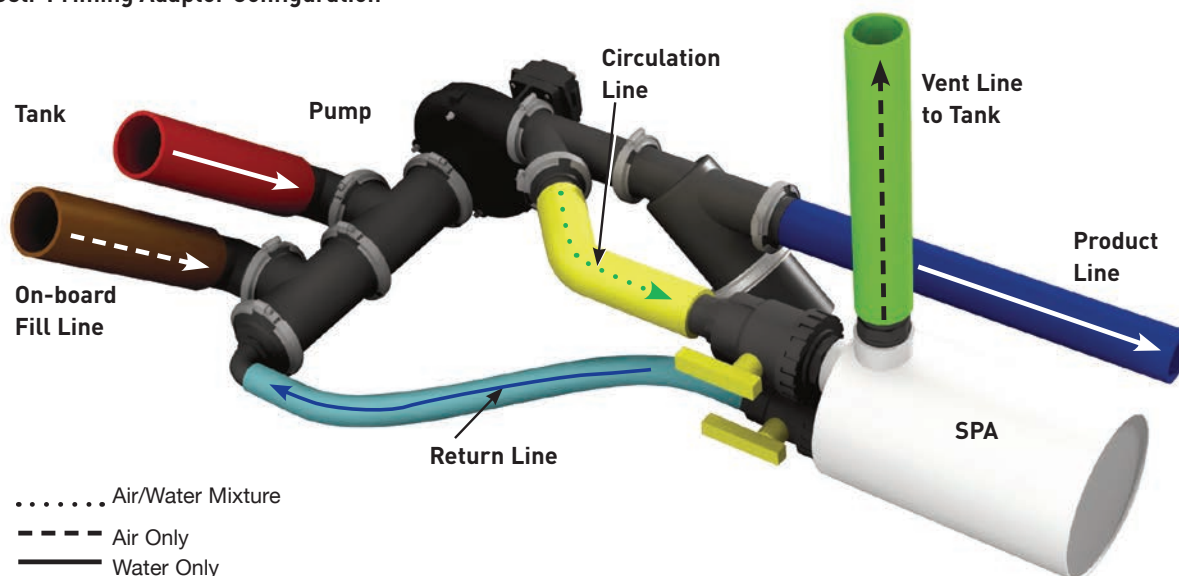

How the Self-Priming Adaptor Works

To facilitate pump priming, liquid is circulated through the pump and eye of the impeller. The attached Self-Priming Adaptor (SPA) stores an initial amount of liquid for the priming operation. The SPA, when activated with two ball valves, separates the air from the liquid being circulated and releases it back to the atmosphere through the vent line. Only liquid returns back to the pump inlet, thereby eliminating the inlet suction line of air. Once the pump is primed, pump pressure and flow increases. Flow is directed to the tank. The operator then closes the two ball valves, shutting off the circulation path between the pump and SPA.

Centrifugal Pump Accessories

12 Volt Clutch



Part Number	Shaft Size	Pulley Type	Max. HP	Max. RPM	Max. AMPS @ 12V	Pump Model	Est. Weight Ea.
2526-0011	7/8" (19 mm)	5.25" (140 mm)-A	30	5000	4.85	9203P, 9253P-C, 9500P-S, 9205C, 9205C-SP	8 lbs./3.6kg
3430-0592	5/8" (15.9 mm)	5.00" (125 mm) Double Groove-A	30	5000	3.75	9202C, 9203C, 9206C, 9203C-R, 9262C-C, 9263C-C, 9263C-CR, 9203C-SP, 92625-C, 92635-C, 9263S-CR, 9263C-C-SP, 9263C-CR-SP	9 lbs./4.1kg

Vent Line Kit



Part Number	Description	Est. Weight Ea.
3430-0456	Vent line kit with 25' (6.3 m) long, 1/4" ID vinyl hose, 1/8" NPT x 1/4" HB 90° nylon elbow fitting, 1/8" NPT x 1/4" HB straight polypropylene fitting, plastic hose clamp and plastic cable tie. Works with all Hypro centrifugals.	14 oz./397g
3430-0797	Push-to-connect vent line kit with 25' (6.3 m) long, 1/4" polyethylene tubing, 1/8" MNPT x 1/4" push-to-connect straight, 1/8" MNPT x 1/4" push-to-connect 90° elbow, and plastic cable ties. Works with all Hypro centrifugal pumps.	14 oz./397g

PTO Mounting Clips



Part Number	Pump Series	Est. Weight Ea.
1520-0034	9000P-O and 9000C-O (not for 9040 Series)	4 lbs./1.8 kg



Hydraulic Test Kit

Part Number	Description	Est. Weight Ea.
3430-0650	Hydraulic test kit with pressure and tank fixtures with flow meter and digital pressure gauges. Works with all Hypro HM series motors.	20 lbs./9.1 kg

Centrifugal Pump Repair Tools

Part Number	Pump Series	Description
3010-0061	9000	Main bearing support tool
3010-0064	9000, 9200, 9300	Support bar/sleeve extractor
3010-0066	9200, 9300	Wire brush
3010-0067	9200, 9300	Wire brush holder
3010-0084	9000, 9200, 9300	Internal/external retaining ring pliers
3010-0167	9000, 9300	Internal/external retaining ring pliers
3010-0168	9000, 9200, 9300	Tool box
3020-0008	9300	Allen wrench; 1/4" hex
3020-0009	9200, 9300	Allen wrench; 1/16" hex
3430-0650	9300	Hydraulic test kit

Transfer Pumps-3 in. Polypropylene

Series 1543P, 9243P and 9343P



Achieve the highest performance available in a 3" poly transfer pump (up to 484 GPM / 1832 LPM) with the highest efficiency and horsepower on the market. Ideal for nurse tank transfer and other closed system applications. The polypropylene housing and EPDM elastomers protect the pump from most chemicals and corrosive environments.

- Gas engine mount, pedestal mount or hydraulic drive options available
- Gas engine-driven versions powered by field proven 13 HP Hypro PowerPro engine or Honda GX390 (EPA & CARB certified)
- Housing: 3" X 3" Polypropylene
- Pump Seals: EPDM Mechanical
- Suction lift: 25 ft./7.62 m
- Poly impeller with stainless steel insert

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfg. & HP
1543P-130SP	440	1666	54	3.7	3"x 3" NPT	PowerPro 13 HP
1543P-130ESP	440	1666	54	3.7	3"x 3" NPT	PowerPro 13 HP w/ elec. start
1543P-130ESP-01	440	1666	54	3.7	300 x 300 UF	PowerPro 13 HP w/ elec. start
1543P-390EHSP	440	1666	54	3.7	3"x 3" NPT	Honda® GX390 w/ elec. start
9243P-SP	460	1741	54	3.7	3"x 3" NPT	Pedestal
9343P-GM6-SP	450	1703	52	3.6	3"x 3" NPT	Hydraulic
9343P-GM6Y-SP*	450	1703	52	3.6	3"x 3" NPT	Hydraulic
9343P-GM10-SP	484	1832	58	4.0	3"x 3" NPT	Hydraulic
9343P-GM10Y-SP*	484	1832	58	4.0	3"x 3" NPT	Hydraulic
3430-0692	Pump head kit with EPDM seal					
3430-0757	EDPM seal kit					
3410-0042	Cam lock kit					

* Y= case drain motor

1543P-130SP, 1543P-130ESP, 1543P-390EHSP, 1543P-130ESP-01 U.S. Units

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
440	400	338	269	184	68	0

1543P-130SP, 1543P-130ESP, 1543P-390EHSP, 1543P-130ESP-01 Metric Units

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
1666	1514	1279	1018	697	257	0

9243P-SP

U.S. Units

	Feet	0	12	23	35	46	58	69	81	92	104	116
	PSI	0	5	10	15	20	25	30	35	40	45	50
2900	GPM	380	358	342	312	275	224	160	50	-	-	-
	RPM	HP	7.1	6.8	6.5	6.3	6.0	5.6	5.0	4.2	-	-
3200	GPM	424	405	384	359	331	297	251	193	103	0	-
	RPM	HP	9.1	8.9	8.7	8.5	8.3	8.0	7.5	7.0	6.2	5.3
3500	GPM	460	445	425	404	379	353	321	280	227	159	70
	RPM	HP	12.2	11.8	11.4	11.1	10.9	10.6	10.2	9.8	9.2	8.5

9243P-SP

Metric Units

	m	5.1	10.2	12.8	15.3	17.9	20.4	23.0	25.5	28.1	30.6	33.2	35.7
	BAR	0.50	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50
2900	LPM	1325	1193	1097	980	830	637	376	46	-	-	-	-
	RPM	kW	5.0	4.7	4.6	4.4	4.1	3.8	3.4	2.9	-	-	-
3200	LPM	1497	1378	1301	1215	1118	996	853	660	403	154	-	-
	RPM	kW	6.6	6.4	6.3	6.1	6.0	5.7	5.5	5.2	4.7	4.3	-
3500	LPM	1650	1537	1471	1403	1328	1242	1139	1016	866	685	467	208
	RPM	kW	8.7	8.3	8.2	8.0	7.9	7.7	7.5	7.2	6.9	6.5	6.0

9343P-GM6-SP

US Units

Performance	Feet	0	12	23	35	46	58	69	81	92	104	116	127
	PSI	0	5	10	15	20	25	30	35	40	45	50	55
8 gal/min	GPM	342	316	284	240	176	67	-	-	-	-	-	-
9 gal/min	GPM	378	355	327	294	252	194	103	-	-	-	-	-
10 gal/min	GPM	414	394	371	345	314	276	227	155	52	-	-	-
11 gal/min	GPM	450	433	414	392	368	340	307	265	210	128	28	-

9343P-GM6-SP

Metric Units

Performance	m	5.1	10.2	12.8	15.3	17.9	20.4	23.0	25.5	28.1	30.6	33.2	35.7
	BAR	0.50	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50
30 l/min	LPM	1110	885	730	495	145	-165	-	-	-	-	-	-
35 l/min	LPM	1335	1180	1085	970	825	630	345	35	-	-	-	-
40 l/min	LPM	1545	1425	1355	1270	1185	1080	960	805	600	325	45	-

9343P-GM10-SP

US Units

Performance	Feet	0	12	23	35	46	58	69	81	92	104	116	127
	PSI	0	5	10	15	20	25	30	35	40	45	50	55
12 gal/min	GPM	364	340	310	274	227	157	46	-	-	-	-	-
13 gal/min	GPM	391	368	342	312	275	227	158	55	-	-	-	-
14 gal/min	GPM	415	395	373	348	318	282	236	170	74	-	-	-
15 gal/min	GPM	445	426	406	383	357	327	292	247	187	102	7	-
16 gal/min	GPM	484	466	446	425	401	374	344	309	266	211	139	47

9343P-GM10-SP

Metric Units

Performance	m	5.1	10.2	12.8	15.3	17.9	20.4	23.0	25.5	28.1	30.6	33.2	35.7
	BAR	0.50	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50
45 l/min	LPM	1225	1045	925	775	560	250	43	-	-	-	-	-
50 l/min	LPM	1390	1240	1150	1045	920	760	540	255	-24	-	-	-
55 l/min	LPM	1535	1405	1335	1255	1165	1060	935	780	575	310	35	-
60 l/min	LPM	1730	1610	1540	1470	1390	1305	1215	1105	985	840	665	445

Gas Engine-Driven Transfer Pumps – 2 in. & 3 in. Cast Iron

Series 1530



1532C-6SP with PowerPro Engine

- Gas engine driven (EPA & CARB certified)
- Pump seals: fluoroelastomer (viton)
- Suction lift: 20 ft. (6 m)
- Flapper valve: EPDM

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1532C-6SP	170	644	42	2.9	2" x 2" NPT	PowerPro 6.5 hp
1532C-160HSP	170	644	42	2.9	2" x 2" NPT	Honda GX160
1533C-13SP	330	1249	60	4.1	3" x 3" NPT	PowerPro 13 hp
1533C-13ESP	330	1249	60	4.1	3" x 3" NPT	PowerPro 13 hp w/ electric start
1533C-390EHSP	330	1249	60	4.1	3" x 3" NPT	Honda GX390 w/ electric start
3430-0673CSP	170	644	42	2.9	Pump head kit for 2" NPT self-priming cast iron transfer pump	
3430-0674CSP	330	1249	60	4.1	Pump head kit for 3" NPT self-priming cast iron transfer pump	

1532C-6SP, 1532C-160HSP

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 42 PSI
170	155	140	123	106	87	65	42	14	0

1532C-6SP, 1532-160HSP

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 2.9 BAR
644	587	530	466	401	329	246	159	53	0

1533C-13SP, 1533C-13ESP, 1533C-390EHSP

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 66 PSI
330	325	321	315	296	273	248	221	192	161	129	48	0

1533C-13SP, 1533C-13ESP, 1533C-390EHSP

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.6 BAR
1249	1230	1215	1192	1120	1033	938	836	726	609	488	181	0

Pedestal-Mount Transfer Pumps – 2 in. & 3 in. Cast Iron



3430-0674CSP



9232C-SP

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Description
9232C-SP	170	644	42	2.9	2" x 2" NPT self priming pedestal-mount cast iron transfer pump
9233C-SP	330	1249	60	4.1	3" x 3" NPT self priming pedestal-mount cast iron transfer pump
3430-0673CSP	170	644	42	2.9	Pump head kit for 2" NPT self-priming cast iron transfer pump
3430-0674CSP	330	1249	60	4.1	Pump head kit for 3" NPT self-priming cast iron transfer pump
3430-0675	Replacement pedestal for 2" NPT self-priming cast iron transfer pump				
3430-0676	Replacement pedestal for 3" NPT self-priming cast iron transfer pump				

9232C-SP, 3430-0673CSP

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 42 PSI
170	155	140	123	106	87	65	42	14	0

9232C-SP, 3430-0673CSP

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 2.9 BAR
644	587	530	466	401	329	246	159	53	0

9233C-SP, 3430-0674CSP

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 66 PSI
330	325	321	315	296	273	248	221	192	161	129	48	0

9233C-SP, 3430-0674CSP

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.6 BAR
1249	1230	1215	1192	1120	1033	938	836	726	609	488	181	0

Hydraulically-Driven Transfer Pumps – 2 in. Cast Iron



9332C-HM_C-SP

- Housing: cast iron
- Pump seals: fluoroelastomer (viton)
- Suction lift: 20 ft. (6 m)
- Flapper valve: EPDM

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Hyd. Flow GPM	Hyd. Flow LPM	Port Size
9332C-HM1C-SP	170	644	60	4.1	13	49	2" x 2" NPT
9332C-HM5C-SP	170	644	60	4.1	16	60	2" x 2" NPT

9332C-HM1C-SP

U.S. Units

Hyd. Flow GPM	GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
8	150	138	124	88	53	0		
9	160	150	140	113	79	48	0	
10	170	163	155	135	108	77	42	0

9332C-HM1C-SP

Metric Units

Hyd. Flow LPM	LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
30	568	522	469	333	201	0		
34	606	567	530	428	229	182	0	
38	643	617	587	511	409	291	159	0

9332C-HM5C-SP

U.S. Units

Hyd. Flow GPM	GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
10	150	138	123	90	55	0		
11	160	150	140	113	79	48	0	
12	170	163	155	135	108	77	42	0

9332C-HM5C-SP

Metric Units

Hyd. Flow LPM	LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
38	568	522	466	341	208	0		
42	606	568	530	428	299	182	0	
45	644	617	587	511	409	291	158	0

Electric Motor Mount Transfer Pumps – 2 in. & 3 in. Cast Iron



- Housing: cast iron
- Pump seals: fluoroelastomer (viton)
- Suction lift: 20 ft. (6 m)
- Flapper valve: EPDM

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	NEMA Frame
9732C-SPX*	170	644	42	2.9	2" x 2" NPT	182/184TC
9733C-SPX*	330	1249	60	4.1	3" x 3" NPT	215TC

* Electric Motor not included

9732C-SPX

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI
170	151	133	113	94	74	52	25	0

9732C-SPX

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR
644	572	503	428	356	280	197	95	0

9733C-SPX

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI	GPM at 55 PSI	GPM at 60 PSI	GPM at 61 PSI
330	325	320	310	290	265	230	195	163	133	95	50	11	0

9733C-SPX

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR	LPM at 3.8 BAR	LPM at 4.1 BAR	LPM at 4.2 BAR
1249	1230	1211	1173	1098	1003	871	738	617	503	360	190	42	0

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Gas Engine-Driven Transfer Pumps – 2 in. Polypropylene

Series 1542P



1542P-65SPM 6.5 HP
with frame

- Gas engine driven (EPA & CARB certified-North America and EC/CE Listed -Europe)
- Pump Seals: EPDM Mechanical
- Suction lift: 25 ft./7.62 m
- Available with or without frame

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1542P-65SP	200	757	58	4.0	2" x 2" NPT	PowerPro 6.5 hp
1542P-65SPM	200	757	58	4.0	2" x 2" NPT	PowerPro 6.5 hp with frame
1542P-65ESP	200	757	58	4.0	2" x 2" NPT	PowerPro 6.5 hp w/ elec. start
1442P-65SP	200	757	58	4.0	2" x 2" NPT	6.5 HP EC/CE listed
1542P-160HSP	200	757	58	4.0	2" x 2" NPT	Honda® GX160
1542P-200HSP	200	757	58	4.0	2" x 2" NPT	Honda® GX200
1542P-950BSP	200	757	58	4.0	2" x 2" NPT	Briggs & Stratton® 950
1542P-55SP	150	568	58	4.0	2" x 2" NPT	PowerPro 6.5 hp
1542P-550BSP	150	568	58	4.0	2" x 2" NPT	Briggs & Stratton® 550
3410-0041	Cam lock kit					
3430-0690	Pump head kit for 1542P-55SP with EPDM seal					
3430-0691	Pump head kit for 1542P-65SP with EPDM seal					
3430-0635	EPDM seal kit					
3430-0659	Viton seal kit					

1542P-55SP, 1542P-550BSP

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
150	147	131	108	80	48	0

U.S. Units

1542P-55SP, 1542P-550BSP

Metric Units

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
568	556	496	409	303	182	0

1542P-65SP, 1542P-200HSP, 1542P-950BSP

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
200	182	162	136	106	65	0

U.S. Units

1542P-65SP, 1542P-200HSP, 1542P-950BSP

Metric Units

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
757	689	613	515	401	246	0

Hydraulically-Driven Transfer Pumps – 2 in. Polypropylene

Series 9342P

9342P-HM_C-5SP
Hydraulic drive



Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Motor Capacity
9342P-HM1C-5SP	200	757	58	40	2" x 2" NPT	10 gpm
9342P-HM5C-5SP	206	780	60	41	2" x 2" NPT	11 gpm
3430-0635	EPDM seal kit					

9342P-HM1C-5SP

Hyd. Flow GPM	GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
8	165	145	122	95	57		
9	185	166	144	119	86	0	
10	200	184	164	141	114	80	0

U.S. Units

9342P-HM1C-5SP

Metric Units

Hyd. Flow LPM	LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
30.3	625	549	463	358	215		
34.1	700	630	547	449	325	0	
37.9	757	695	620	534	433	301	0

9342P-HM5C-5SP

Hyd. Flow GPM	GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
9	175	154	123	84	0		
10	192	174	149	118	76	0	
11	206	189	169	145	117	79	0

U.S. Units

9342P-HM5C-5SP

Metric Units

Hyd. Flow LPM	LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
34.1	662	582	467	316	0		
37.9	727	658	562	446	288	0	
41.6	780	717	639	550	442	299	0

Honda® is a registered trademark of Honda Motor Co., Ltd.

Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation. Hypro® is a registered trademark of Pentair Ltd.

Gas Engine-Driven Transfer Pumps – 2 in. & 3 in. Aluminum

Series 1540A



1541A-SP



1543A-65TSP



1543A-65SP

- PowerPro Gas engine driven (EPA & CARB certified)
- Housing: Aluminum
- Pump seals: EPDM Mechanical
- Suction lift:
 - 13 ft./4m (1541A)
 - 23 ft./7.01m (1542A & 1543A)
- Trash pumps will handle 1-1/8" (29 mm) solids
- Transfer pumps will handle 3/8" (9.5mm) solids
- Framed: 1542A & 1543A versions only

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1541A-SP	40	151	28	1.9	2" x 2" BSP	PowerPro 2.5 hp
1542A-65SP	147	556	50	3.4	2" x 2" NPT	PowerPro 6.5 hp
1542A-160HSP	147	556	50	3.4	2" x 2" NPT	Honda GX160
1542A-550BSP	147	556	50	3.4	2" x 2" NPT	Briggs & Stratton 550
1543A-65SP	259	980	50	3.4	3" x 3" NPT	PowerPro 6.5 hp
1543A-160HSP	259	980	50	3.4	3" x 3" NPT	Honda GX160
1543A-65TSP (Trash)	272	1030	50	3.4	3" x 3" NPT	PowerPro 6.5 hp
1543A-160HTSE	272	1030	50	3.4	3" x 3" NPT	Honda GX160
3430-0791	3" Trash Kit (NPT ports, SAE 3/4" keyed shaft mount)					
3430-0792	2" Transfer Kit (NPT ports, SAE 3/4" keyed shaft mount)					
3430-0793	3" Transfer Kit (NPT ports, SAE 3/4" keyed shaft mount)					

1541A-SP

U.S. Units

GPM at 0 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 28 PSI
40	28	21	14	7	0

1541A-SP

Metric Units

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 1.9 BAR
151.4	106.0	79.5	53.0	26.5	0

1542A-65SP, 1542A-160HSP, 1542P-550BSP

U.S. Units

GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
147	144	136.6	124.7	110.2	94.1	78.3	57.1	19.2	0

1542A-65SP, 1542A-160HSP, 1542P-550BSP

Metric Units

LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
556.5	545.1	517.1	472	417.2	356.2	296.4	216.1	72.7	0

1543A-65SP, 1543A-160HSP

U.S. Units

GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
259	251.6	233.7	213.6	190.9	162.2	135.8	99.3	56.1	8.7

1543A-65SP, 1543A-160HSP

Metric Units

LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
980.4	952.4	884.6	808.6	722.6	614	514.1	375.9	212.4	32.9

1543A-65TSP, 1543A-160HTSE

U.S. Units

GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
272	269.8	241	207.6	179.3	140.4	98.1	50.7	5.4	0

1543A-65TSP, 1543A-160HTSE

Metric Units

LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
1029.6	1021.3	912.3	785.8	678.7	531.5	371.3	191.9	20.4	0

Honda® is a registered trademark of Honda Motor Co., Ltd.

Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation. Hypro® is a registered trademark of Pentair Ltd.

Transfer Pumps – 2 in. & 3 in. Aluminum

Series 1570



- Honda® engine (EPA & CARB certified)
- Close-coupled, gas engine driven
- Housing: Aluminum
- Pump seals: Buna-N/ceramic
- Inlet valve: Buna-N
- Suction lift: 28 ft./8.53m

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1572-SPX	145	549	50	3.4	2" x 2" NPT	Honda® 4 hp
1573-SPX	280	1060	50	3.4	3" x 3" NPT	Honda® 5.5 hp

1572-SPX

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
145	141	133	125	114	102	87	70	51	24	0

1572-SPX

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
549	534	503	473	432	386	329	265	193	91	

1573-SPX

U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
280	268	255	233	211	181	149	115	77	46	0

1573-SPX

Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
1060	1014	965	882	799	685	564	435	291	174	

Transfer Pumps Accessories

Transfer Pump Cam Lock Kit



Order Information

Size	Model Number
2" NPT	3410-0041
3" NPT	3410-0042


Hypro cam lock kits easily add heavy-duty male cam lock connections to the NPT ports of 2" and 3" polypropylene pumps.

- Includes one male cam lock adapter for pump inlet
- Includes one heavy-duty 90° elbow and one male cam lock adapter for the pump outlet
- Prepares transfer pumps for the most common means of quick coupling a hose
- Interchangeable with other cam lock fittings made to MIL-C-27487 specifications

Honda® is a registered trademark of Honda Motor Co., Ltd.
Hypro is a registered trademark of Pentair.

Roller Pump Comparisons

Get up to 10 times longer pump life with Hypro Silver Series XL Roller pumps!

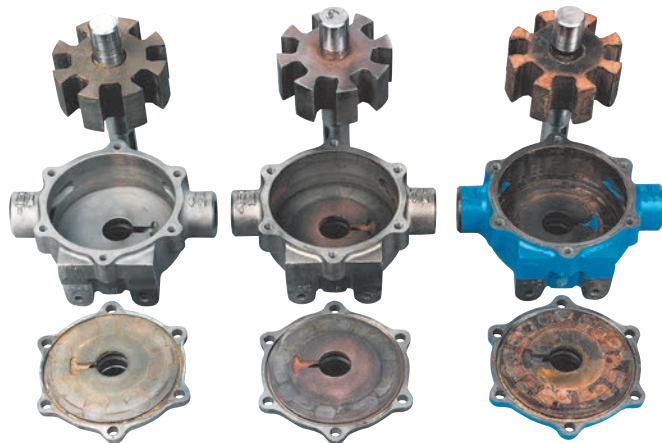

Silver Series XL

Ni-Resist

Cast Iron


Herbicide users:

Get up to 10 times longer pump life!

- Cast Iron pumps lasted to 140 hours before failure.
- Ni-Resist pumps lasted to 332 hours before failure.
- Silver Series X pumps ran over 1000 hours and still met new pump specs!

These three pumps were photographed after being tested with a 30:1 mix of water and Roundup® herbicide.

The Ni-Resist and Cast Iron indicate damage from pitting and corrosion, but the Silver Series XL is in like-new condition after more than 1000 hours of use.

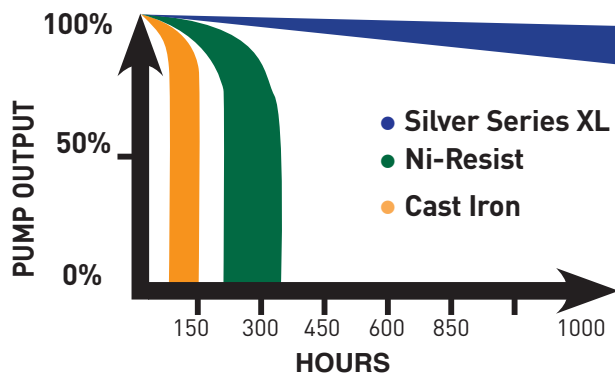

Floating Design, PTFE Coating



Ni-Resist Pumps

Improvements with Hypro Roller Pumps

Floating PTFE coated rotors

- Floating rotor design and black PTFE coating on metal rotors increases performance and extends pump life
- Standard production in 4001, 4101, 6500, & 7560 Silver Series XL and Ni-Resist pumps
- Available at no additional charge

Clear Coat Finish

- Offers increased protection from chemical attack and from the elements
- Included on all Ni-Resist roller pumps
- Available at no additional charge

Pump Recommendations for Applications

Which Roller Pump, Rollers and Seals Should You Use?

Material options for rollers and seals are listed in the order of recommendations for usage. These recommendations are only a general guide. For suggestions on specific chemicals or applications, call Pentair's Technical/Applications Department at (800) 445-8360.

Application	Specific Chemicals	Suggestions							
		Housing Materials			Roller Materials			Seal Materials	
		Silver Series XL	Ni-Resist	Cast Iron	Super Roller	Poly Rollers	Teflon® Rollers*	Viton®	Buna-N
WEED CONTROL CHEMICALS	Emulsions, soluble powders, sodium arsenate.	X	X	X	X			X	
	Chemicals containing glyphosate (such as Roundup®) or other acidics	X			X	X	X*	X	
INSECT CONTROL	Emulsions not containing aromatic solvents.	X	X	X	X			X	
BRUSH CONTROL	Heavy-duty sprays using diesel oil for carrier.	X	X	X	X			X	
PEST CONTROL CHEMICALS, FUMIGANTS, ETC.	This category or use includes mosquito sprays, termite control liquids, nematocides, soil and grain fumigants where any of the following chemicals with aromatic solvents are present: Pentachlorophenol, xylene, xylol, benzene, high sulphur fuel or diesel oil. Fumigants containing: ethylene dichloride, ethylene dibromide, carbon tetrachloride, perchlorethylene, trichlorethylene, methyl bromide, and other aromatic solvents.	X	X	X	X			X	
LIQUID FERTILIZERS	Up to 32% nitrogen content, or others if the liquid is atmospheric pressure and the temperature is handled.	X	X			X			X
POWDERED FERTILIZERS	Fertilizers dissolved in water (greenhouse plant food).	X	X	X	X	X		X	X
PUMPING	Large quantities of plain water.	X	X	X	X	X		X	X
SPRAYING	Wettable powder sprays.	X	X	X	X	X		X	X
MATERIAL HANDLING	Heavy abrasive powders in suspension.	X	X	X	X	X		X	X
ACIDS	Mild sulfuric acid for spraying. Mild muriatic acid, inhibited muriatic, etc.	X				X	X*	X	

*Note: Limit Pressure at 100 psi (6.9 bar) when using Teflon® Rollers.

Cast Iron, Ni-Resist or Silver Series XL

Series 4001 4 Roller



Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP
	@1100 RPM		@1400 RPM		@1800 RPM	
0 PSI	5.5	.06	7.1	.10	9.1	.14
0 BAR	20.8	.06	26.9	.10	34.4	.14
25 PSI	4.9	.14	6.4	.20	8.5	.30
1.7 BAR	18.5	.14	24.2	.20	32.2	.30
50 PSI	4.4	.24	5.9	.32	8.0	.46
3.4 BAR	16.6	.24	22.3	.32	30.3	.46
75 PSI	4.1	.34	5.6	.44	7.6	.62
5.2 BAR	15.5	.34	21.2	.44	28.7	.62
100 PSI	3.8	.41	5.3	.56	7.3	.78
6.9 BAR	14.4	.41	20.1	.56	27.6	.78
125 PSI	3.5	.50	5.0	.68	7.0	.95
8.6 BAR	13.2	.50	18.9	.68	26.5	.95
150 PSI	3.3	.62	4.8	.78	6.7	1.1
10.3 BAR	12.5	.62	18.2	.78	25.4	1.1

- Port size: 3/4" NPT
- Max. fluid temperature: 140°F/60°C
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Pump shaft rotation: Clockwise when looking at the shaft end (counter clockwise available)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton standard
- Available shaft adapters: See page 67
- Special torque arm and base kit is available for gas engines
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 5 lbs./2.3 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
4001C	9.1	34.4	150	10.3	1800	5/8"	15.9 mm	solid
4001C-H	9.1	34.4	150	10.3	1800	1/2"	12.7 mm	hollow
4001	9.1	34.4	150	10.3	1800	5/8"	15.9 mm	solid
4001N-H	9.1	34.4	150	10.3	1800	1/2"	12.7 mm	hollow
4001XL	9.1	34.4	150	10.3	1800	5/8"	15.9 mm	solid
4001XL-H	9.1	34.4	150	10.3	1800	1/2"	12.7 mm	hollow

Teflon® rollers - Add Suffix "T2" - (i.e.: 4001C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 4001C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 4001C-R).

Cast Iron, Ni-Resist or Silver Series XL

Series 4101 4 Roller



Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP
	@1800 RPM		@2200 RPM		@2600 RPM	
0 PSI	5.0	.11	6.2	.14	7.2	.16
0 BAR	18.9	.11	23.5	.14	27.3	.16
25 PSI	4.8	.21	5.8	.27	6.9	.30
1.7 BAR	18.1	.21	21.9	.27	26.1	.30
50 PSI	4.5	.34	5.6	.40	6.6	.46
3.4 BAR	17.0	.34	21.2	.40	25.0	.46
75 PSI	4.2	.45	5.4	.55	6.4	.62
5.2 BAR	15.9	.45	20.4	.55	24.2	.62
100 PSI	3.9	.56	5.0	.68	6.0	.76
6.9 BAR	14.8	.56	18.9	.68	22.7	.76
125 PSI	3.7	.68	4.7	.82	5.7	.92
8.6 BAR	14.0	.68	17.8	.82	21.6	.92
150 PSI	3.4	.78	4.4	.96	5.4	1.08
10.3 BAR	12.9	.78	16.6	.96	20.4	1.08

- Port size: 3/4" NPT
- Max. fluid temperature: 140°F/60°C
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Pump shaft rotation: Clockwise when looking at the shaft end (counter clockwise available)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton standard
- Available shaft adapters: See page 67
- Special torque arm and base kit is available for gas engines
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 5 lbs./2.27 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
4101C	7.2	27.3	150	10.3	2600	5/8"	15.9 mm	solid
4101C-H	7.2	27.3	150	10.3	2600	1/2"	12.7 mm	hollow
4101N	7.2	27.3	150	10.3	2600	5/8"	15.9 mm	solid
4101N-H	7.2	27.3	150	10.3	2600	1/2"	12.7 mm	hollow
4101XL	7.2	27.3	150	10.3	2600	5/8"	15.9 mm	solid
4101XL-H	7.2	27.3	150	10.3	2600	1/2"	12.7 mm	hollow

Teflon® rollers - Add Suffix "T2" - (i.e.: 4101C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 4101C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 4101C-R).

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Ni-Resist or Silver Series XL

Series 4001 and 4101 12 volt DC 4 Roller



- Super Rollers and Viton seals standard
- Locking collar and torque arm come in each package
- Rotor: Ni-Resist (N) or Silvercast (XL)
- Weight: 16-18 lbs./7.3-8.2 kg

Note: All models come in either Ni-Resist or Silver Series XL housings.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S	Metric	Shaft
4001N-EH	10.4	39.4	30	2.1	1900	1/2"	12.7 mm	hollow
4001N-E2H	9.9	37.5	50	3.4	1600	1/2"	12.7 mm	hollow
4001XL-EH	10.4	39.4	30	2.1	1900	1/2"	12.7 mm	hollow
4001XL-E2H	9.9	37.5	50	3.4	1600	1/2"	12.7 mm	hollow
4101N-EH	7.5	28.4	50	3.4	1900	1/2"	12.7 mm	hollow
4101N-E2H	5.9	22.3	90	6.2	1600	1/2"	12.7 mm	hollow
4101XL-EH	7.5	28.4	50	3.4	1900	1/2"	12.7 mm	hollow
4101XL-E2H	5.9	22.3	90	6.2	1600	1/2"	12.7 mm	hollow

Teflon® rollers - Add Suffix "T2" - (i.e.: 4001N-EHT2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 4001N-EHT3).

U.S. Units

Series 4101-EH and 4101-E2H	Model 4101N-EH & 4101XL-EH				Model 4101N-E2H & 4101XL-E2H			
	Volts	PSI	AMPS	GPM	PSI	AMPS	GPM	
	12.0 (Battery) Engine Off	0	10.0	6.3	0	---	---	
		5	11.3	6.0	10	8.4	5.3	
		10	12.5	5.8	20	11.8	4.8	
		15	13.7	5.6	30	13.7	4.65	
		20	15.1	5.4	40	16.4	4.4	
		25	16.7	5.2	50	19.6	4.05	
		30	18.6	5.0	60	22.8	3.65	
		35	20.3	4.8	70	25.8	3.20	
		40	22.3	4.6	80	28.9	3.00	
		45	24.1	4.4	90	31.5	2.75	
		50	25.7	4.2	100	34.2	2.60	
	13.5 (Alternator) Engine Running	0	10.4	7.5	0	---	---	
		5	11.7	7.0	10	9.1	5.9	
		10	13.0	6.6	20	11.2	5.6	
		15	14.2	6.4	30	13.9	5.25	
		20	15.8	6.2	40	16.9	5.0	
		25	17.4	6.0	50	19.5	4.7	
		30	19.6	5.8	60	22.7	4.35	
		35	20.9	5.6	70	25.7	4.0	
		40	22.5	5.4	80	29.2	3.6	
		45	24.3	5.2	90	31.9	3.4	
		50	26.1	5.0	100	34.8	3.2	

Metric Units

Series 4101-EH and 4101-E2H	Model 4101N-EH & 4101XL-EH				Model 4101N-E2H & 4101XL-E2H			
	Volts	BAR	AMPS	LPM	BAR	AMPS	LPM	
	12.0 (Battery) Engine Off	0	10.0	23.8	0	---	---	
		.3	11.3	22.7	.7	8.4	20.0	
		.7	12.5	22.0	1.4	11.8	18.2	
		1.0	13.7	21.2	2.1	13.7	17.6	
		1.4	15.1	20.4	2.8	16.4	16.7	
		1.7	16.7	19.7	3.4	19.6	15.3	
		2.1	18.6	18.9	4.1	22.8	13.8	
		2.4	20.3	18.2	4.8	25.8	12.1	
		2.8	22.3	17.4	5.5	28.9	11.4	
		3.1	24.1	16.7	6.2	31.5	10.4	
		3.4	25.7	15.9	6.9	34.2	9.84	
	13.5 (Alternator) Engine Running	0	10.4	28.4	0	---	---	
		.3	11.7	26.5	.7	9.1	22.3	
		.7	13.0	25.0	1.4	11.2	21.2	
		1.0	14.2	24.2	2.1	13.9	19.9	
		1.4	15.8	23.5	2.8	16.9	18.9	
		1.7	17.4	22.7	3.4	19.5	17.8	
		2.1	19.6	22.0	4.1	22.7	16.5	
		2.4	20.9	21.2	4.8	25.7	15.1	
		2.8	22.5	20.4	5.5	29.2	13.6	
		3.1	24.3	19.7	6.2	31.9	12.9	
		3.4	26.1	18.9	6.9	34.8	12.1	

Series 4001-EH and 4001-E2H	Model 4001N-EH & 4001XL-EH				Model 4001N-E2H & 4001XL-E2H			
	Volts	PSI	AMPS	GPM	PSI	AMPS	GPM	
	12.0 (Battery) Engine Off	0	12.6	9.0	10	13.9	8.4	
		5	14.1	8.3	20	18.0	7.9	
		10	15.2	8.1	30	22.2	7.2	
		15	17.3	7.8	35	25.0	6.9	
		20	19.7	7.2	40	27.0	6.5	
		25	22.1	6.7	50	31.6	5.9	
		30	24.8	6.2	60	36.2	5.4	
	13.5 (Alternator) Engine Running	0	13.4	10.4	10	14.4	9.9	
		5	14.8	9.9	20	18.3	9.1	
		10	16.2	9.4	30	22.3	8.5	
		15	18.2	8.9	35	24.5	8.3	
		20	20.5	8.5	40	27.0	8.0	
		25	22.5	8.2	50	31.0	7.3	
		30	24.9	7.7	60	36.1	6.8	

Series 4001-EH and 4001-E2H	Model 4001N-EH & 4001XL-EH				Model 4001N-E2H & 4001XL-E2H			
	Volts	BAR	AMPS	LPM	BAR	AMPS	LPM	
	12.0 (Battery) Engine Off	0	12.6	34.1	.7	13.9	31.8	
		.3	14.1	31.4	1.4	18.0	29.9	
		.7	15.2	30.7	2.1	22.2	27.3	
		1.0	17.3	29.5	2.4	25.0	26.1	
		1.4	19.7	27.3	2.8	27.0	24.6	
		1.7	22.1	25.4	3.5	31.6	22.3	
		2.1	24.8	23.5	4.1	36.2	20.4	
		0	13.4	39.4	.7	14.4	37.5	
	13.5 (Alternator) Engine Running	.3	14.8	37.5	1.4	18.3	34.4	
		.7	16.2	35.6	2.1	22.3	32.2	
		1.0	18.2	33.7	2.4	24.5	31.4	
		1.4	20.5	32.2	2.8	27.0	30.3	
		1.7	22.5	31.0	3.5	31.0	27.6	
		2.1	24.9	29.1	4.1	36.1	25.7	

Cast Iron, Ni-Resist or Silver Series XL

Series 6500 6-Roller



Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP
	@540 RPM		@1000 RPM		@1200 RPM	
0 PSI	9.7	.08	18.2	.20	21.8	.30
0 BAR	36.7	.08	68.9	.20	82.5	.30
50 PSI	8.0	.38	16.5	.71	20.1	.90
3.4 BAR	30.3	.38	62.4	.71	76.1	.90
100 PSI	7.2	.68	15.4	1.26	19.1	1.51
6.9 BAR	27.3	.68	58.3	1.26	72.3	1.51
150 PSI	6.6	.97	14.7	1.80	18.2	2.14
10.3 BAR	25	.97	55.6	1.80	68.9	2.14
200 PSI	5.6	1.29	14.0	2.34	17.3	2.84
13.8 BAR	21.2	1.29	53	2.34	65.5	2.84
250 PSI	4.9	1.65	13.4	2.91	16.5	3.48
17.2 BAR	18.5	1.65	50.7	2.91	62.4	3.48
300 PSI	4.3	1.91	12.7	3.47	15.7	4.17
20.7 BAR	16.3	1.91	48.1	3.47	59.4	4.17

- Port size: 3/4" NPT
- 1" hose barb inlet fitting for 1000 rpm operation
- Max. fluid temperature: 140°F/60°C
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Shaft rotation: Counter clockwise when looking at the shaft end (clockwise available)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton standard
- Available PTO adapters: See page 67
- Recommended PTO torque arm kit 3430-0540
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 9 lbs./4.1 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
6500C	21.8	82.5	300	20.7	1200	5/8"	15.9 mm	solid
6500N	21.8	82.5	300	20.7	1200	5/8"	15.9 mm	solid
6500XL	21.8	82.5	300	20.7	1200	5/8"	15.9 mm	solid

Teflon® rollers - Add Suffix "T2" - (i.e.: 6500C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 6500C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 6500C-R).

Cast Iron, Ni-Resist or Silver Series XL

Series 7560 8-Roller



Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP
	@540 RPM		@800 RPM		@1000 RPM	
0 PSI	12	.33	18.3	.89	22.5	1.56
0 BAR	45.4	.33	69.3	.89	85.2	1.56
50 PSI	11.1	.74	17.5	1.26	22	1.78
3.4 BAR	42	.74	66.2	1.26	83.3	1.78
100 PSI	10.3	1.25	16.9	1.95	21.3	2.53
6.9 BAR	39	1.25	64	1.95	80.6	2.53
150 PSI	9.5	1.77	16.1	2.65	20.6	3.5
10.3 BAR	36	1.77	60.9	2.65	78	3.5
200 PSI	8.6	2.26	15.5	3.4	20	4.2
13.8 BAR	32.5	2.26	58.7	3.4	75.7	4.2
250 PSI	7.0	2.78	14.5	4.2	18.9	5.3
17.2 BAR	29.5	2.78	54.9	4.2	71.5	5.3
300 PSI	7.1	3.3	18.9	5.3	18.0	6.1
20.7 BAR	26.9	3.3	51.9	5.3	68.1	6.1

- Max. fluid temperature: 140°F/60°C
- Port sizes: 3/4" NPT
- 1" hose barb inlet fitting for 1000 rpm operation
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Shaft rotation: Counter clockwise when looking at the shaft end (clockwise available)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton standard
- Available PTO adapters: See page 67
- Recommended PTO torque arm kit 3430-0540
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 13 lbs./5.89 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
7560C	22.5	85.2	300	26.7	1000	15/16"	23.8 mm	solid
7560N	22.5	85.2	300	26.7	1000	15/16"	23.8 mm	solid
7560XL	22.5	85.2	300	26.7	1000	15/16"	23.8 mm	solid

Teflon® rollers - Add Suffix "T2" - (i.e.: 7560C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 7560C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 7560C-R).

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Hydraulically-Driven Cast Iron, Ni-Resist or Silver Series

Series 7560-GM30, 7560-GM15 8-Roller



- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Max. fluid temperature: 140°F/60°C
- Pump port size: 3/4" NPT
- 1" hose barb inlet fitting for 1000 rpm operation
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton® standard
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Motor port size: -10 SAE (7/8" - 14" UNF)

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Motor Capacity	
						Hydraulic Flow Max US	Hydraulic Flow Max Metric
7560C-GM30	20.8	78.7	300	20.7	1000	12 gpm	45 lpm
7560N-GM30	20.8	78.7	300	20.7	1000	12 gpm	45 lpm
7560XL-GM30	20.8	78.7	300	20.7	1000	12 gpm	45 lpm
7560C-GM15	20.1	76.1	300	20.7	1000	6 gpm	23 lpm
7560N-GM15	20.1	76.1	300	20.7	1000	6 gpm	23 lpm
7560XL-GM15	20.1	76.1	300	20.7	1000	6 gpm	23 lpm

Teflon® rollers - Add Suffix "T2" - (i.e.: 7560C-GM30-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 7560C-GM30-T3).

7560C,N,XL-GM15

U.S. Units

Hyd.GPM	GPM at									
	0 PSI	25 PSI	50 PSI	75 PSI	100 PSI	125 PSI	150 PSI	200 PSI	250 PSI	300 PSI
3	10.6	9.4	8.5	7.7	7.1	6.5	5.8	4.8	3.2	1.6
4	14.1	13.1	12.0	11.3	10.6	10.0	9.3	8.3	6.9	5.2
5	17.4	16.6	15.7	15.0	14.4	13.5	13.2	11.8	10.3	8.7
6	20.8	20.1	19.4	18.6	17.9	17.1	16.5	14.9	13.3	11.8

7560C,N,XL-GM15

Metric Units

Hyd.LPM	LPM at									
	0 Bar	1.7 Bar	3.5 Bar	5.2 Bar	6.9 Bar	8.6 Bar	10.3 Bar	13.8 Bar	17.2 Bar	20.7 Bar
11.4	40.1	35.6	32.2	29.1	26.9	24.6	22.0	18.2	12.1	6.1
15.1	53.4	49.6	45.4	42.8	40.1	37.9	35.2	31.4	26.1	19.7
18.9	65.9	62.8	59.4	56.8	54.5	51.1	50.0	44.7	39.0	32.9
22.7	78.7	76.1	73.4	70.4	67.8	64.7	62.5	56.4	50.3	44.7

7560C,N,XL-GM30

U.S. Units

Hyd. GPM	GPM at									
	0 PSI	25 PSI	50 PSI	77 PSI	100 PSI	125 PSI	150 PSI	200 PSI	250 PSI	300 PSI
5	9.0	8.5	7.8	7.3	6.7	6.1	5.5	4.4	3.3	2.2
6	10.5	10.0	9.5	8.9	8.4	7.8	7.3	6.2	5.2	4.1
7	11.9	11.5	11.0	10.4	9.9	9.4	8.9	7.8	6.8	5.7
8	13.7	13.1	12.5	12.0	11.5	10.9	10.4	9.4	8.4	7.3
9	15.2	14.6	14.1	13.6	13.1	12.6	12.1	11.1	10.0	9.1
10	16.9	16.5	15.9	15.4	14.9	14.3	13.9	12.9	11.9	11.0
11	18.6	18.2	17.6	17.1	16.6	16.1	15.6	14.7	13.8	12.9
12	20.1	19.6	19.1	18.6	18.1	17.6	17.1	16.3	15.3	14.5

7560C,N,XL-GM30

Metric Units

Hyd. LPM	LPM at										
	0 BAR	2 BAR	4 BAR	6 BAR	8 BAR	10 BAR	12 BAR	14 BAR	16 BAR	18 BAR	20 BAR
20	35.8	33.2	30.5	28.1	25.6	23.4	20.9	18.5	15.8	12.6	10.0
25	42.8	39.5	36.8	34.0	31.8	29.2	26.2	23.7	21.6	18.9	16.4
30	51.8	49.0	45.8	43.0	40.3	37.9	35.3	33.3	31.1	28.9	26.2
35	58.1	55.8	52.7	50.1	47.7	45.5	43.1	40.9	38.8	36.3	33.5
40	67.6	64.8	62.4	60.0	57.7	55.8	53.4	51.3	48.8	46.6	44.1
45	75.3	72.7	70.4	68.1	66.0	63.8	61.8	59.8	57.8	55.7	53.3

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co. Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair Ltd.

Cast Iron, Ni-Resist or Silver Series XL

Series 7700 7-Roller



- Max. fluid temperature: 140°F/60°C
- Port size: 3/4" NPT
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Shaft rotation: Counter clockwise when looking at the shaft end (Clockwise available)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton standard
- Available PTO adapters: See page 67
- Recommended PTO torque arm kit 3430-0540
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 14 lbs./6.36 kg

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP
	@540 RPM		@600 RPM		@800 RPM	
0 PSI	14.2	.23	15.3	.28	22.1	.37
0 BAR	53.7	.23	57.9	.28	83.6	.37
50 PSI	12.9	.56	14.0	.62	20.7	.86
3.4 BAR	48.8	.56	53	.62	78.3	.86
100 PSI	11.9	1.10	13.0	1.20	19.5	1.66
6.9 BAR	45	1.10	49.2	1.20	73.8	1.66
150 PSI	11.2	1.64	12.3	1.80	18.6	2.40
10.3 BAR	42.4	1.64	46.6	1.80	70.4	2.40
200 PSI	10.3	2.22	11.6	2.44	17.8	3.26
13.8 BAR	39	2.22	43.9	2.44	67.4	3.26

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
7700C	22.1	83.7	200	13.8	800	15/16"	23.8 mm	solid
7700N	22.1	83.7	200	13.8	800	15/16"	23.8 mm	solid
7700XL	22.1	83.7	200	13.8	800	15/16"	23.8 mm	solid

Teflon® rollers - Add Suffix "T2" - (i.e.: 7700C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 7700C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 7700C-R).

Cast Iron, Ni-Resist or Silver Series XL

Series 1700 5-Roller



- Max. fluid temperature: 140°F/60°C
- Port size: 1" NPT
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Shaft rotation: Counter clockwise when looking at the shaft end (Clockwise available)
- Rollers: Super Rollers standard [Poly (T3) and Teflon® (T2) available]
- Shaft Seals: Viton standard
- Available PTO adapters (forged steel recommended): See page 67
- Recommended PTO torque arm kit 3430-0540
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 19 lbs./8.6 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
1700C	45	170	200	13.8	1000	15/16"	23.8 mm	solid
1700N	45	170	200	13.8	1000	15/16"	23.8 mm	solid
1700XL	45	170	200	13.8	1000	15/16"	23.8 mm	solid

Teflon® rollers - Add Suffix "T2" - (i.e.: 1700C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 1700C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 1700C-R).

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Cast Iron, Ni-Resist or Silver Series XL

Series 1502 6-Roller



- Max. fluid temperature: 140°F/60°C
- Port size: 1-1/2" NPT
- Housing: Cast Iron (C), Ni-Resist (N) or Silvercast (XL)
- Shaft rotation: Counter clockwise when looking at the shaft end (Clockwise available)
- Rollers: Super rollers standard [Poly (T3) available]
- Shaft Seals: Buna-N standard on Cast Iron and Ni-Resist [Viton (Q) available]; Viton standard on Silver Series XL
- Available PTO adapters (forged steel recommended): See page 67
- Recommended PTO Torque Arm Kit 3430-0540
- Rotor: Cast Iron, Ni-Resist or Silvercast
- Weight: 30 lbs./13.6 kg

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP
	@540 RPM		@600 RPM		@1000 RPM	
0 PSI	33.1	.51	36.8	.66	62.1	2.02
0 BAR	125	.51	139	.66	235	2.02
25 PSI	29.7	1.02	33.6	1.15	58.5	3.04
1.7 BAR	112	1.02	127	1.15	221	3.04
50 PSI	27.8	1.45	31.7	1.68	56.9	3.69
3.4 BAR	105	1.45	120	1.68	215	3.69
100 PSI	24.3	2.46	28.3	2.78	53.9	5.31
6.9 BAR	92	2.46	107	2.78	204	5.31
150 PSI	21.0	3.54	25.0	3.95	50.9	7.12
10.3 BAR	79.5	3.54	94.6	3.95	193	7.12

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output		
						U.S.	Metric	Shaft
1502C	62	235	200	13.8	1000	15/16"	23.8 mm	solid
1502N	62	235	200	13.8	1000	15/16"	23.8 mm	solid
1502XL	62	235	200	13.8	1000	15/16"	23.8 mm	solid

Teflon® rollers - Add Suffix "T2" - (i.e.: 1502C-T2).

Polypropylene rollers - Add Suffix "T3" - (i.e.: 1502C-T3).

Reverse rotation* - Add Suffix "R" - (i.e.: 1502C-R).

Cast Iron or Silver Series XL, Gas Engine Driven

Models: 4101C-25, 4101XL-25



- 2.5 HP PowerPro Engine
- Port size: 3/4" NPT
- Housing: Cast Iron (C) or Silvercast (XL)
- Rollers: Super rollers standard [Poly (T3) and Teflon® (T2)]
- Shaft Seals: Viton standard
- Rotor: Cast Iron (C) or Silvercast (XL)
- Weight: 29 lbs./13.1 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Engine Mfr. & HP
4101C-25	8.9	34.7	100	6.9	PowerPro 2.5 hp
4101XL-25	8.9	34.7	150	10.3	PowerPro 2.5 hp

Pressure in PSI and BAR	GPM
BAR	LPM
0 PSI	8.9
0 BAR	34
50 PSI	8.6
3.4 BAR	33
100 PSI	8.3
6.9 BAR	31
150 PSI	8.0
10.3 BAR	30

Teflon® is a registered trademark of E.I. DuPont de Nemours and Co.

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

Roller Pump Kits & Accessories

Roller Pump Accessory Selection Guide

Description	Series 1500	Series 1700	Series 6500	Series 7560	Series 7700	Series 4000	Series 5200
540 rpm 1-3/8" Forged Steel PTO Adapter	1320-0076	1320-0076	1320-0077	1320-0076	1320-0076	-----	1320-0081
1000 rpm 1-3/8" Forged Steel PTO Adapter	1320-0078	1320-0078	1320-0079	1320-0078	-----	1320-0079	-----
1000 rpm 1-3/4" Forged Steel PTO Adapter	1320-0080	1320-0080	-----	1320-0080	-----	-----	-----
540 rpm 1-3/8" Forged Steel Quick Coupler	1323-0072	1323-0072	1323-0074	1323-0072	1323-0072	-----	-----
1000 rpm 1-3/8" Forged Steel Quick Coupler	1323-0073	1323-0073	1323-0075	1323-0073	-----	-----	-----
Multi-Speed 1-3/8" Forged Steel Quick Coupler	1323-0076	1323-0076	1323-0077	1323-0076	1323-0076	1323-0077	-----
Steel Shaft Adapter 3/4" x 5/8	-----	-----	1320-0015	-----	-----	1320-0015	-----
Steel Shaft Adapter 5/8" x 5/8	-----	-----	1320-0016	-----	-----	1320-0016	-----
Repair Kits	3430-0387 3430-0386	3430-0437	3430-0380	3430-0381	3430-0384	3430-0390	-----
Torque Arm Kit	-----	3430-0540	3430-0540	3430-0540	3430-0540	-----	-----
Base Kits	3420-0004	3420-0010	3420-0023	3420-0003	3420-0010	3420-0024* 3420-0025**	-----
Hydraulic Flange Kit	-----	-----	-----	3430-0636	-----	-----	-----

* For electric motor drive 3 1/2" shaft centerline (4001, 4101).

** For gas engine drive 43/16" shaft centerline (4101 only).

Roller Repair Kits

Kit Number	Pump Series	Description	Estimated Weight Ea.	
			US Units	Metric Units
3430-0387	1502C and 1502N	Roller kit includes: 6 Super Rollers, 1 o-ring gasket, and 2 Buna-N seals	1 lb. 7 oz.	652 g
3430-0386	1502XL	Roller kit includes: 6 Super Rollers, 1 o-ring gasket, and 2 Viton® seals	1 lb. 8 oz.	680 g
3430-0437	1700	Roller kit includes: 5 Super Rollers, 1 o-ring gasket, and 2 Viton® seals	1 lb. 5 oz.	595 g
3430-0380	6500	Roller kit includes: 6 Super Rollers, 1 o-ring gasket, and 2 Viton® seals	8 oz.	227 g
3430-0381	7560/7700	Roller kit includes: 8 Super Rollers, 1 o-ring gasket, and 2 Viton® seals	12 oz.	340 g
3430-0390	4001/4101	Roller kit includes: 4 Super Rollers, 1 o-ring gasket, and 2 Viton® seals	3 oz.	85 g

Base Kits

Kit Number	Pump Series	Description	Estimated Weight Ea.	
			US Units	Metric Units
3420-0025	4101	Base kit for mounting to gas engine, 4-3/16" shaft centerline. Base kit includes: 1 Base, 2 Bolts and 2 Lock washers	12 oz.	340 g
3420-0024	4001/4101	Base kit for mounting to an electric motor, 3-1/2" shaft centerline. Base kit includes: 1 Base, 2 Bolts and 2 Lock washers	7 oz.	198 g
3420-0023	6500	Base kit includes: 1 Base, 2 Bolts and 2 Lock washers	12 oz.	340 g
3420-0003	7560	Base kit includes: 1 Base, 3 Bolts and 3 Lock washers	1 lb. 10 oz.	737 g
3420-0010	7700/1700	Base kit includes: 1 Base and 4 Bolts	14 oz.	397 g
3420-0004	1500	Base kit includes: 1 Base and 4 Bolts	6 lbs.	2.7 kg

Roller Pump Repair Tools and Tool Kits

Kit Number	Pump Series	Description
3011-0006	6500	Tool Kit
3011-0021	4001/4101	Tool Kit
3010-0001†	1700, 6500, 7560, 7700	Support fixture
3010-0002†	1700, 6500, 7560, 7700	Support fixture
3010-0003†	4001/4101, 6500	Bearing and seal assembly tool
3010-0004†	4001/4101, 6500	Bearing disassembly tool
3010-0005	1500, 1700, 7560, 7700	Bearing and seal assembly tool
3010-0006	1500, 1700, 7560, 7700	Bearing disassembly tool
3010-0010*	4001/4101, 6500	Bearing support tool
3010-0014*	4001/4101, 6500	Bearing race support tool
3010-0020	1500, 1700, 7560, 7700	Bearing support tool
3010-0066*	1500, 1700, 4001/4101, 6500, 7560, 7700	Wire brush
3010-0067*	1500, 1700, 4001/4101, 6500, 7560, 7700	Wire brush holder
3010-0068*	1500, 1700, 4001/4101, 6500, 7560, 7700	Tool Box
3020-0009*	1500, 1700, 4001/4101, 6500, 7560, 7700	Allen wrench; 1/16" hex

* Included in 3011-0006 - Tool kit for 6500 series roller pumps.

† Included in 3011-0021 - Tool kit for 4001/4101 series roller pumps.

PTO and Shaft Adapters (Female to Female)



Part Number	US	Metric	US	Metric	Material	RPM	Pump Model
	PTO (I.D.)	PTO (I.D.)	Pump End (I.D.)	Pump End (I.D.)			
1320-0015	3/4"	19 mm	5/8"	19 mm	steel	*	4000, 6500
1320-0016	5/8"	15.9 mm	5/8"	15.9 mm	steel	*	4000, 6500
1320-0076	1-3/8" (6 spline)	34.9 mm (6 spline)	15/16"	23.8 mm	forged steel	540	1500, 1700, 7560, 7700
1320-0077	1-3/8" (6 spline)	34.9 mm (6 spline)	5/8"	34.9 mm	forged steel	540	6500
1320-0078	1-3/8" (21 spline)	34.9 mm (21 spline)	15/16"	23.8 mm	forged steel	1000	1500, 1700, 7560
1320-0079	1-3/8" (21 spline)	34.9 mm (21 spline)	5/8"	34.9 mm	forged steel	1000	4000, 6500
1320-0080	1-3/4" (20 spline)	44.5 mm (20 spline)	15/16"	23.8 mm	forged steel	1000	1500, 1700, 7560
1320-0081	1-3/8" (6 spline)	34.9 mm (6 spline)	1"	34.9 mm	forged steel	540	5200

* Refer to recommended pump rpm.

Quick Couplers (Female to Female)



Part Number	PTO (I.D.)		Pump End (I.D.)		Material	RPM	Pump Model
	US	Metric	US	Metric			
1323-0072	1-3/8" (6 spline)	34.9 mm (6 spline)	15/16"	23.8 mm	forged steel	540	1500, 1700, 7560, 7700
1323-0073	1-3/8" (21 spline)	34.9 mm (21 spline)	15/16"	23.8 mm	forged steel	1000	1500, 1700, 7560
1323-0074	1-3/8" (6 spline)	34.9 mm (6 spline)	5/8"	15.9 mm	forged steel	540	6500
1323-0075	1-3/8" (21 spline)	34.9 mm (21 spline)	5/8"	15.9 mm	forged steel	1000	4000, 6500
1323-0076	1-3/8" (multi-speed)	34.9 mm (multi-speed)	15/16"	23.8 mm	forged steel	540/1000	1500, 1700, 7560, 7700
1323-0077	1-3/8" (multi-speed)	34.9 mm (multi-speed)	5/8"	15.9 mm	forged steel	540/1000	4000, 6500

Other Pump Accessories

Couplers



Inches	mm
1/8"	3.2 mm
3/16"	4.7 mm
1/4"	6.4 mm
1/2"	13 mm
5/8"	15.9 mm
3/4"	19 mm
7/8"	22.2 mm
15/16"	23.8 mm
1"	25.4 mm
1-1/8"	28.6 mm

Note:
These couplers are designed for inch dimensional shafts and keys. Metric dimensions are for reference only (except for 2739-1009).

Series	Part Number	Description	Estimated Weight Each	
			US Units	Metric
2738 (2.0 hp limit)* Replaces L-075	2738-1001	1/2" coupling end, with 1/8" keyway	6 oz.	170 g
	2738-1002	5/8" coupling end, with 3/16" keyway	6 oz.	170 g
	2738-1003	3/4" coupling end, with 3/16" keyway	6 oz.	170 g
	2738-1004	7/8" coupling end, with 3/16" keyway	6 oz.	170 g
	2728-1001	Center disc	1 oz.	28 g
2739 (5.0 hp limit)* Replaces L-095	2739-1001	5/8" coupling end, with 3/16" keyway	11 oz.	312 g
	2739-1002	3/4" coupling end, with 3/16" keyway	11 oz.	312 g
	2739-1003	7/8" coupling end, with 3/16" keyway	11 oz.	312 g
	2739-1004	15/16" coupling end, with 1/4" keyway	11 oz.	312 g
	2739-1005	1" coupling end, with 1/4" keyway	11 oz.	312 g
	2739-1006	1-1/8" coupling end, with 1/4" keyway	11 oz.	312 g
	2739-1009	24 mm coupling end, with 8mm keyway	11 oz.	312 g
	2729-1001	Center disc	1 oz.	28 g
	2729-1005	Heavy-duty center disc, urethane material	1 oz.	28 g
2741 (10.5 hp limit)* Replaces L-100	2741-1001	3/4" coupling end, with 3/16" keyway	1 lb. 5 oz.	595 g
	2741-1004	15/16" coupling end, with 1/4" keyway	1 lb. 5 oz.	595 g
	2741-1002	1" coupling end, with 1/4" keyway	1 lb. 5 oz.	595 g
	2741-1005	1-1/4" coupling end, with 1/4" keyway	1 lb. 5 oz.	595 g
	2741-1007	1-3/8" coupling end, with 5/16" keyway	1 lb. 5 oz.	595 g
	2741-1003	1-1/8" coupling end, with 1/4" keyway	1 lb. 5 oz.	595 g
	2729-1002	Center disc	1 oz.	28 g
	2729-1006	heavy-duty center disc, urethane material	1 oz.	28g
2740 (18.0 hp limit)* Replaces L-110	2740-1001	3/4" coupling end, with 3/16" keyway	3 lbs. 11 oz.	1.67 kg
	2740-1002	1" coupling end, with 1/4" keyway	3 lbs. 8 oz.	1.59 kg
	2740-1005	1-3/8" coupling end, with 5/16" keyway	3 lbs.	1.4 kg
	2740-1007	1-1/8" coupling end, with 1/4" keyway	2 lbs. 15 oz.	1.33 kg
	2729-1003	Center disc	3 oz.	85 g

* HP limit is electric motor hp at 1725 rpm for driving a steady uniform load. For an uneven load, stop-start and moderate shock loads, divide hp by a 1.5 service factor.

Ordering Instructions:

To order one 1/2" x 3/4" Series 2738 coupling, specify the following:

Note: It is not necessary to order in complete sets, parts can be ordered individually.

Quantity	Part Number	Description
1	2738-1001	1/2" coupling end
1	2738-1003	3/4" coupling end
1	2728-1001	Center disc

Relief Valves



Part Number	Ports-NPT Inlet (M) Outlet (F)	Max. PSI	Max. BAR	Body Material	Valve Material	Estimated Weight Each	
						US Units	Metric
3300-0002	1/2" M x 1/2" F	200	14	cast bronze	stainless steel ball	10 oz.	283 g
3300-0001	3/4" M x 3/4" F	400	28	cast bronze	stainless steel ball	1 lb. 1 oz.	482 g
3301-0001	3/4" M x 3/4" F	400	28	cast bronze	flat neoprene	1 lb. 2 oz.	510 g
3300-0093	3/4" M x 3/4" F	300	20	cast bronze	stainless steel ball	1 lb. 2 oz.	510 g
3300-0094	1" M x 3/4" F	150	10	cast bronze	stainless steel ball	1 lb. 4 oz.	567 g
3316-0002	1-1/4"	200	14	cast iron	stainless steel cone	2 lbs. 14 oz.	1.3 kg
3300-0015	3/4" M - 3/4" F	150	10	nylon	nylon	6 oz.	170 g
3300-0016	3/4" M - 3/4" F	250	17	nylon	nylon	6 oz.	170 g
3300-0098	3/4" M - 3/4" F	400	28	nylon	nylon	6 oz.	170 g

Torque Arm Kit (pump not included)



Part Number	Material	RPM	For Pump Series	Estimated Weight Each	
				US Units	Metric
3430-0540	steel	540/1000	1502, 1700, 6500, 7560, and 7700	2 lbs. 4 oz.	1.02 kg

Poly Diaphragm Pump Series

Series 9910-DP423, DP573, and DP763



- Glass-filled polypropylene construction of head, manifold and control components for the maximum in chemical resistance
- Flow rate up to 11.5 gpm (43.3 lpm), 15.6 gpm (59 lpm) and 20.2 gpm (76.5 lpm) pressure up to 290 psi (20 bar)
- 3 cylinder design eliminates the need for pulsation dampening devices and lengthens the life of the entire pumping system
- Kynar™ and 300 series stainless steel valve design for higher flow and better corrosion resistance
- The external inlet and outlet manifold design vs. an internal manifold design allows for easy valve replacement and lower cost repairs

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Description
9910-DP423	11.5	43.3	290	20	Poly Diaphragm Pump
9910-DP423GRGI	11.5	43.3	290	20	Poly Diaphragm Pump with Gearbox and Control Unit
9910-DP573	15.6	59.1	290	20	Poly Diaphragm Pump
9910-DP573GRGI	15.6	59.1	290	20	Poly Diaphragm Pump with Gearbox and Control Unit
9910-DP763	20.2	76.4	290	20	Poly Diaphragm Pump
9910-DP763GRGI	20.2	76.4	290	20	Poly Diaphragm Pump with Gearbox and Control Unit
9910-GS25	Control Unit (DP 423)				
9910-GS35S	Control Unit (DP573 & DP763)				

DP423

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Ø350 RPM		Ø400 RPM		Ø450 RPM		Ø500 RPM		Ø550 RPM	
0 PSI	7.5	0.18	8.5	0.20	9.4	0.29	10.5	0.35	11.5	0.42
0 BAR	28.3	0.18	32.2	0.20	35.6	0.29	39.5	0.35	43.3	0.42
72 PSI	7.3	0.46	8.3	0.53	9.2	0.61	10.2	0.68	11.0	0.77
5 BAR	27.4	0.46	31.2	0.53	34.6	0.61	38.5	0.68	41.5	0.77
145 PSI	7.2	0.77	8.2	0.87	9.1	0.98	10.1	1.11	11.0	1.21
10 BAR	27.3	0.77	31.1	0.87	34.5	0.98	38.2	1.11	41.4	1.21
217 PSI	7.0	1.06	8.1	1.21	9.1	1.37	10.0	1.51	10.8	1.68
15 BAR	26.5	1.06	30.5	1.21	34.5	1.37	37.7	1.51	40.7	1.68
290 PSI	6.9	1.33	7.8	1.53	9.1	1.74	9.8	1.93	10.6	2.14
20 BAR	26.0	1.33	29.5	1.53	34.2	1.74	37.0	1.93	40.1	2.14

DP573

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Ø350 RPM		Ø400 RPM		Ø450 RPM		Ø500 RPM		Ø550 RPM	
0 PSI	10.4	0.14	11.7	0.17	13.0	0.24	14.3	0.32	15.6	0.43
0 BAR	39.5	0.10	44.3	0.13	49.1	0.18	54.3	0.24	59.1	0.32
72 PSI	10.3	0.54	11.6	0.62	12.6	0.67	14.2	0.77	15.5	0.83
5 BAR	39.0	0.40	43.8	0.46	47.7	0.50	53.9	0.57	58.6	0.62
145 PSI	10.1	0.95	11.4	1.09	12.6	1.22	14.1	1.28	15.2	1.41
10 BAR	38.4	0.71	43.0	0.81	47.6	0.91	53.3	0.95	57.5	1.05
217 PSI	9.9	1.33	11.1	1.50	12.5	1.71	13.9	1.89	14.9	2.07
15 BAR	37.3	0.99	41.9	1.12	47.4	1.28	52.7	1.41	56.4	1.54
290 PSI	9.7	1.60	10.8	1.88	12.5	2.14	13.8	2.43	14.8	2.64
20 BAR	36.8	1.19	40.9	1.40	47.3	1.60	52.3	1.81	56.1	1.97

DP763

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Ø350 RPM		Ø400 RPM		Ø450 RPM		Ø500 RPM		Ø550 RPM	
0 PSI	13.7	0.20	15.3	0.29	17.1	0.39	18.8	0.51	20.2	0.63
0 BAR	51.8	0.15	57.8	0.22	64.9	0.29	71.0	0.38	76.4	0.47
72 PSI	13.4	0.71	15.2	0.77	16.8	0.90	18.4	0.98	20.1	1.11
5 BAR	50.9	0.53	57.6	0.57	63.5	0.67	69.8	0.73	76.0	0.83
145 PSI	13.3	1.21	15.0	1.39	16.7	1.58	18.4	1.76	19.9	1.93
10 BAR	50.5	0.90	56.8	1.04	63.4	1.18	69.7	1.31	75.4	1.44
217 PSI	12.8	1.76	14.9	2.02	16.7	2.25	18.1	2.50	19.5	2.75
15 BAR	48.5	1.31	56.3	1.51	63.1	1.68	68.6	1.86	73.9	2.05
290 PSI	12.7	2.12	14.6	2.49	16.5	2.77	18.0	3.12	19.4	3.45
20 BAR	48.0	1.58	55.4	1.86	62.3	2.07	68.2	2.33	73.4	2.57

Kynar™ is a registered trademark of Arkema, Inc.
Hypor® is a registered trademark of Pentair.

Low Pressure, 2 Diaphragm

Model 9910-D70 and D70GR



- Max. fluid temperature: 140°F/60°C
- Port sizes: 1-1/4" inlet, 1" outlet, hose barb
- Diaphragms: 2, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 3300-0087 or 3300-0088, see page 84.
- Weight: 22 lbs./10 kg (D70); 31 lbs./14 kg (D70GR)

Order Information

Pressure in PSI and BAR	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM			
0 PSI	13.6	0.33	15.1	0.40	16.9	0.48	18.4	0.58	19.6	0.80		
0 BAR	51.2	0.33	57.1	0.40	63.7	0.48	69.4	0.58	74.1	0.80		
72 PSI	11.2	0.73	12.7	0.79	14.1	0.91	15.6	1.01	17.0	1.09		
5 BAR	42.3	0.73	47.9	0.79	53.2	0.91	58.8	1.01	64.3	1.09		
145 PSI	11.0	1.20	12.4	1.39	13.9	1.63	15.2	1.66	16.6	1.91		
10 BAR	41.4	1.20	46.9	1.39	52.6	1.63	57.3	1.66	62.7	1.91		
217 PSI	10.7	1.71	12.3	2.10	13.8	2.19	15.1	2.36	16.3	2.63		
15 BAR	40.4	1.71	46.3	2.10	52.2	2.19	57.1	2.36	61.6	2.63		
290 PSI	10.6	2.18	12.1	2.46	13.7	2.77	15.0	3.12	16.1	3.39		
20 BAR	40.0	2.18	45.7	2.46	51.8	2.77	56.7	3.12	60.6	3.39		

All HP requirements listed in the table are electrical.
For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9910-D70	19.6	74.2	290	20	550	Select shaft kit for desired drive
9910-D70GR	19.6	74.2	290	20	3600	3/4" hollow shaft w/ gear reduction for 5 hp gas engine

Low Pressure, 3 Diaphragm

Model 9910-D115 and D115GR34



- Max. fluid temperature: 140°F/60°C
- Port sizes: 1-1/2" inlet, 1" outlet, hose barb
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 3300-0087 or 3300-0088, see page 84.
- Weight: 35 lbs./15.9 kg (D115); 44 lbs./20 kg (D115GR34)

Order Information

Pressure in PSI and BAR	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM			
0 PSI	18.9	0.33	21.4	0.40	23.9	0.45	26.4	0.69	28.6	0.91		
0 BAR	71.5	0.33	80.9	0.40	90.1	0.45	99.7	0.69	107.9	0.91		
72 PSI	18.6	1.13	20.7	1.18	23.4	1.40	25.5	1.62	27.9	1.83		
5 BAR	70.0	1.13	78.2	1.18	88.5	1.40	96.1	1.62	105.3	1.83		
145 PSI	18.3	1.89	20.5	2.13	23.2	2.47	25.3	2.82	27.7	2.99		
10 BAR	69.0	1.89	77.4	2.13	87.5	2.47	95.6	2.82	104.4	2.99		
217 PSI	18.2	2.72	20.4	3.11	23.1	3.51	25.1	3.88	27.6	4.33		
15 BAR	68.6	2.72	77.0	3.11	87.0	3.51	94.7	3.88	104.0	4.33		
290 PSI	18.0	3.45	20.3	3.98	22.9	4.54	25.0	5.09	27.5	5.51		
20 BAR	68.0	3.45	76.7	3.98	86.2	4.54	94.2	5.09	103.8	5.51		

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9910-D115	28.6	108.3	290	20	550	Select shaft kit for desired drive
9910-D115GR34	28.6	108.3	290	20	3600	3/4" hollow shaft w/ gear reduction for 5 hp gas engine

Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Low Pressure, 3 Diaphragm

Model 9910-D135



- Max. fluid temperature: 140°F/60°C
- Port sizes: 1-1/2" inlet, 1" outlet, hose barb
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated
- Pump shaft rotation: CW and CCW
- Recommended control unit: 3300-0087 or 3300-0088, see page 84.
- Weight: 38 lbs./17.2 kg

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM	
0 PSI	22.6	0.51	25.8	0.69	28.8	0.92	31.5	1.22	33.9	1.45
0 BAR	85.4	0.51	97.3	0.69	108.8	0.92	118.8	1.22	128.0	1.45
72 PSI	22.2	1.31	25.3	1.64	28.3	1.84	31.2	2.09	33.3	2.44
5 BAR	83.8	1.31	95.6	1.64	106.7	1.84	117.6	2.09	125.8	2.44
145 PSI	22.1	2.29	25.2	2.65	28.2	2.97	31.1	3.45	33.2	3.88
10 BAR	83.4	2.29	95.2	2.65	106.3	2.97	117.2	3.45	125.3	3.88
217 PSI	22.0	3.21	25.1	3.80	28.0	4.31	30.8	4.80	33.1	5.32
15 BAR	83.0	3.21	94.6	3.80	105.7	4.31	116.3	4.80	124.9	5.32
290 PSI	21.7	4.23	24.8	4.88	27.9	5.45	30.7	6.21	33.0	6.84
20 BAR	81.9	4.23	93.4	4.88	105.3	5.45	115.7	6.21	124.6	6.84

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9910-D135	33.9	128.3	290	20	550	1-3/8" - 6 splined male shaft

Low Pressure, 4 Diaphragm

Model 9910-D160



- Max. fluid temperature: 140°F/60°C
- Port sizes: 2" inlet, 1-1/2" outlet, hose barb
- Diaphragms: 4, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated
- Pump shaft rotation: CW and CCW
- For hydraulic drive adaption, see page 82.
- Recommended control unit: 3300-0087 or 3300-0088, see page 84.
- Weight: 66 lbs./30 kg

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM	
0 PSI	27.9	0.61	32.1	0.80	35.1	1.03	38.9	1.33	41.9	1.68
0 BAR	105.3	0.61	121.0	0.80	132.3	1.03	146.6	1.33	158.1	1.68
72 PSI	26.4	1.51	30.0	1.73	33.6	2.01	37.1	2.18	40.9	2.50
5 BAR	99.7	1.51	113.1	1.73	127.0	2.01	139.9	2.18	154.2	2.50
145 PSI	25.4	2.48	28.7	2.91	32.6	3.28	35.7	3.74	38.9	4.13
10 BAR	95.7	2.48	108.5	2.91	122.9	3.28	134.8	3.74	146.8	4.13
217 PSI	24.3	3.45	27.7	4.06	31.0	4.58	34.4	5.13	37.6	5.73
15 BAR	91.8	3.45	104.5	4.06	117.0	4.58	129.8	5.13	141.9	5.73
290 PSI	23.6	4.50	26.9	5.18	30.2	5.86	33.7	6.45	36.8	7.26
20 BAR	89.1	4.50	101.6	5.18	114.1	5.86	127.0	6.45	138.9	7.26

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9910-D160	41.9	155.1	290	20	550	1-3/8" - 6 splined male shaft

Low Pressure, 6 Diaphragm

Model 9910-D250



- Max. fluid temperature: 140°F/60°C
- Port sizes: 2" inlet, 1-1/2" outlet, hose barb
- Diaphragms: 6, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated
- Mounting base: included
- Pump shaft rotation: CW and CCW
- For hydraulic drive adaption, see page 82.
- Recommended control unit: 3300-0082, see page 84.
- Weight: 92 lbs./41.7 kg

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	@350 RPM		@400 RPM		@450 RPM		@500 RPM		@550 RPM	
0 PSI	42.7	0.71	48.3	0.90	54.3	1.22	59.8	1.60	65.7	2.01
0 BAR	161.2	0.71	182.5	0.90	204.8	1.22	225.7	1.60	248.1	2.01
72 PSI	41.4	2.33	47.2	2.73	52.7	3.10	58.1	3.45	63.3	3.88
5 BAR	156.1	2.33	178.2	2.73	198.9	3.10	219.4	3.45	239.0	3.88
145 PSI	40.1	4.09	45.9	4.73	52.1	5.27	56.6	6.02	61.3	6.45
10 BAR	151.4	4.09	173.1	4.73	196.4	5.27	213.8	6.02	231.2	6.45
217 PSI	39.3	5.70	45.1	6.58	50.7	7.45	55.5	8.32	60.2	9.22
15 BAR	148.5	5.70	170.0	6.58	191.5	7.45	209.5	8.32	227.1	9.22
290 PSI	38.8	7.52	44.5	8.45	50.1	9.66	54.8	10.89	59.2	11.54
20 BAR	146.4	7.52	167.9	8.45	189.0	9.66	206.9	10.89	223.4	11.54

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
9910-D250	65.7	248.7	290	20	550	1-3/8" - 6 splined male shaft

Medium Pressure, 2 Diaphragm

Model 9910-D252, D252GRGI, D252GRGI58 and D252GRGIAP



- Max. fluid temperature: 140°F/60°C
- Diaphragms: 2, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included
- Recommended control unit: 9910-KIT1990, see page 83.
- Weight: 14 lbs./6.4 kg (GRGI models); 12 lbs./5.4 kg (D252)

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	@450 RPM		@500 RPM		@550 RPM		@600 RPM		@650 RPM	
0 PSI	4.8	0.15	5.4	0.19	5.9	0.23	6.1	0.25	6.5	0.27
0 BAR	18.0	0.15	20.5	0.19	22.4	0.23	23.1	0.25	24.6	0.27
72 PSI	4.1	0.33	4.6	0.37	5.0	0.42	5.5	0.45	5.9	0.46
5 BAR	15.3	0.33	17.3	0.37	18.7	0.42	20.8	0.45	22.2	0.46
145 PSI	4.0	0.49	4.4	0.57	4.8	0.64	5.3	0.65	5.6	0.72
10 BAR	14.9	0.49	16.6	0.57	18.1	0.64	19.8	0.65	21.3	0.72
217 PSI	3.9	0.66	4.3	0.76	4.7	0.82	5.2	0.89	5.5	0.97
15 BAR	14.7	0.66	16.4	0.76	17.9	0.82	19.6	0.89	20.9	0.97
290 PSI	3.8	0.84	4.2	0.94	4.6	1.02	5.1	1.12	5.4	1.21
20 BAR	14.5	0.84	16.0	0.94	17.4	1.02	19.4	1.12	20.5	1.21

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.
Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-D252	6.5	24.6	290	20	650	3/4" HB inlet, 1/2" HB outlet	3/4" solid keyed shaft
9910-D252GRGI	6.5	24.6	290	20	3600	3/4" HB inlet, 3/8" HB outlet	3/4" hollow shaft
9910-D252GRGI58	5.5	20.8	290	20	3600	3/4" HB inlet, 3/8" HB outlet	5/8" hollow shaft
9910-D252GRGIAP	6.5	24.6	290	20	3600	3/4" HB inlet, 3/8" HB outlet	3/4" hollow input shaft with 5/8" output solid shaft

Medium Pressure, 2 Diaphragm

Model 9910-D30, D30AP-A, D30GRGI and D30-B-GRGI



- Max. fluid temperature: 140°F/60°C
- Shaft: flanged for shaft kit (D30); flanged w/ 3/4" shaft ext. (D30AP-A); 3/4" hollow shaft for gas engine mount (D30GRGI)
- Diaphragms: 2, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-GS40GI, see page 83.
- Weight: 23 lbs./10.4 kg (D30); 33 lbs./15.0 kg (D30GRGI and D30-B-GRGI); 24 lbs./10.9 kg (D30AP-A)

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	③350 RPM	③400 RPM	③450 RPM	③500 RPM	③550 RPM					
0 PSI	6.1	0.13	6.9	0.16	7.8	0.19	8.7	0.24	9.6	0.28
0 BAR	23.0	0.13	26.1	0.16	29.5	0.19	32.8	0.24	36.2	0.28
145 PSI	5.7	0.55	6.6	0.66	7.2	0.76	8.1	0.85	9.3	0.90
10 BAR	21.4	0.55	24.9	0.66	27.3	0.76	30.6	0.85	34.9	0.90
290 PSI	5.6	1.00	6.3	1.14	7.1	1.29	7.8	1.47	8.8	1.64
20 BAR	21.0	1.00	23.7	1.14	26.7	1.29	29.5	1.47	33.4	1.64
465 PSI	5.5	1.46	5.9	1.67	6.9	1.89	7.7	2.06	8.6	2.27
30 BAR	20.6	1.46	22.4	1.67	26.0	1.89	29.0	2.06	32.5	2.27
580 PSI	5.2	1.90	5.8	2.11	6.8	2.41	7.5	2.71	8.3	2.94
40 BAR	19.5	1.90	22.1	2.11	25.8	2.41	28.2	2.71	31.4	2.94

All HP requirements listed in the table are electrical.
For approximate gasoline equivalent, multiply by 1.3.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size
9910-D30	9.6	36.3	580	40	550	1" HB inlet, 1/2" HB outlet
9910-D30AP-A	Same pump as 9910-D30 with 3/4" solid thru shaft					
9910-D30GRGI	9.6	36.3	580	40	3600	Assembled with gearbox 9910-KIT1640 and control 9910-GS40GI for mounting on 5 hp gas engine
9910-D30-B-GRGI	Same pump as 9910-D30GRGI with Buna-N diaphragms					

Medium Pressure, 3 Diaphragm

Model 9910-D403, and D403GRGI



- Max. fluid temperature: 140°F/60°C
- Shaft: flanged for kit attachment (D403); 3/4" hollow shaft for gas engine mount (D403GRGI)
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-GR40, see page 83.
- Weight: 23 lbs./10.4 kg (D403); 32 lbs./14.5 kg (D403GRGI)

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	③350 RPM	③400 RPM	③450 RPM	③500 RPM	③550 RPM					
0 PSI	6.3	0.22	7.3	0.33	8.0	0.41	8.9	0.54	9.9	0.61
0 BAR	23.9	0.22	27.6	0.33	30.3	0.41	33.6	0.54	37.5	0.61
145 PSI	6.2	0.73	7.1	0.91	7.9	1.07	8.8	1.12	9.8	1.21
10 BAR	23.2	0.73	26.7	0.91	29.9	1.07	33.4	1.12	37.1	1.21
290 PSI	6.1	1.21	7.0	1.41	7.8	1.63	8.7	1.82	9.7	2.03
20 BAR	23.0	1.21	26.4	1.41	29.5	1.63	32.8	1.82	36.7	2.03
465 PSI	6.0	1.80	6.8	2.02	7.7	2.34	8.6	2.61	9.6	2.84
30 BAR	22.7	1.80	25.8	2.02	29.2	2.34	32.3	2.61	36.4	2.84
580 PSI	5.9	2.36	6.7	2.65	7.6	2.91	8.4	3.30	9.5	3.62
40 BAR	22.3	2.36	25.5	2.65	28.9	2.91	31.7	3.30	35.9	3.62

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.
Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Drive and Control Unit
9910-D403	9.9	37.5	580	40	550	1" HB inlet, 1/2" HB outlet
9910-D403GRGI	9.9	37.5	580	40	3600	Assembled with gearbox 9910-KIT1640 and control 9910-GR40 for mounting on 5-6 hp gas engines

Medium Pressure, 3 Diaphragm

Model 9910-D50, D50AP-A and D50-B



- Max. fluid temperature: 140°F/60°C
- Shaft: flanged for shaft kit (D50); flange w/1" shaft ext. (D50AP-A)
- Diaphragms: 2, full-hydraulic, Desmopan® standard, Buna available (D50-B has Buna diaphragms)
- Housing components for liquid handling: epoxy coated
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-GS40GI, see page 83.
- Weight: 35 lbs./15.9 kg

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	350 RPM		400 RPM		450 RPM		500 RPM		550 RPM	
0 PSI	9.7	0.36	11.9	0.49	12.3	0.64	13.2	0.77	14.8	0.94
0 BAR	36.8	0.36	45.0	0.49	46.6	0.64	49.9	0.77	55.8	0.94
145 PSI	9.3	1.08	11.5	1.25	11.9	1.49	12.9	1.59	14.6	1.76
10 BAR	35.1	1.08	43.3	1.25	44.9	1.49	48.6	1.59	55.1	1.76
290 PSI	9.1	1.85	11.0	2.09	11.7	2.40	12.6	2.72	14.5	2.97
20 BAR	34.4	1.85	41.5	2.09	44.1	2.40	47.4	2.72	54.9	2.97
465 PSI	8.8	2.61	10.8	3.00	11.6	3.41	12.0	3.80	14.4	4.03
30 BAR	33.2	2.61	40.6	3.00	43.6	3.41	45.3	3.80	54.4	4.03
580 PSI	8.6	3.44	10.3	3.77	11.4	4.38	11.9	4.92	14.1	5.17
40 BAR	32.5	3.44	38.9	3.77	42.9	4.38	44.7	4.92	53.3	5.17

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size
9910-D50	14.8	56.0	580	40	550	1-1/4" HB inlet, 1/2" HB outlet
9910-D50-B	Same pump as 9910-D50 w/Buna-N diaphragms					
9910-D50AP-A	Same pump as 9910-D50 w/solid 1" thru shaft					

Medium Pressure, 3 Diaphragm

Model 9910-D503, D503GRGI and D503GRGI34



- Max. fluid temperature: 140°F/60°C
- Shaft: flanged adapter (D503); 1" hollow shaft for gas engine mount (D503GRGI)
- Diaphragms: 2, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-RM40, see page 83.
- Weight: 28 lbs./12.7 kg

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	350 RPM		400 RPM		450 RPM		500 RPM		550 RPM	
0 PSI	9.4	0.52	12.1	0.86	12.6	0.91	13.4	1.09	14.3	1.32
0 BAR	35.4	0.52	45.5	0.86	47.6	0.91	50.5	1.09	54.1	1.32
145 PSI	9.0	1.24	11.6	1.68	11.9	1.72	13.2	1.85	14.1	2.09
10 BAR	34.1	1.24	44.0	1.68	44.9	1.72	49.7	1.85	53.3	2.09
290 PSI	8.9	2.05	11.4	2.67	11.7	2.74	12.8	3.01	13.8	3.30
20 BAR	33.6	2.05	43.2	2.67	44.1	2.74	48.4	3.01	51.9	3.30
465 PSI	8.7	2.78	11.3	3.72	11.6	3.90	12.6	4.14	13.6	4.41
30 BAR	33.0	2.78	42.5	3.72	43.6	3.90	47.4	4.14	51.4	4.41
580 PSI	8.5	3.56	11.0	4.67	11.4	4.83	12.2	5.37	13.4	5.49
40 BAR	32.2	3.56	41.7	4.67	42.9	4.83	46.0	5.37	50.5	5.49

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Drive and Control Unit
9910-D503	14.3	54.1	580	40	550	-
9910-D503GRGI	14.3	54.1	580	40	3600	Assembled with gearbox 9910-KIT1642 and control 9910-RM40 for mounting on 8 hp gas engine
9910-D503GRGI34	14.3	54.1	290	20	3600	Assembled with gearbox 9910-KIT1640 and control 9910-RM40 for mounting on 5-6.5 hp gas engines

High Pressure, 3 Diaphragm

Model 9910-D813 and D813GRGI



- Max. fluid temperature: 140°F/60°C
- Shaft: Flanged adapter and 1-3/8" - 6 splined male shaft ext. (D813); 1" hollow shaft for gas engine mount (D813GRGI)
- Diaphragms: 3, semi-hydraulic, Desmopan® standard Buna available
- Housing: anodized aluminum
- Mounting base: included
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-VDR50 or 9910-GS50GI, see page 84.
- Weight: 50 lbs./22.7 kg (D813); 66 lbs./30 kg (D813GRGI)

Pressure in PSI and BAR	GPM		HP		GPM		HP		GPM		HP		GPM		HP	
	LPM		HP		LPM		HP		LPM		HP		LPM		HP	
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM		Q600 RPM		Q650 RPM		Q700 RPM	
0 PSI	14.7	0.41	17.0	0.64	18.2	0.74	19.8	0.93	20.8	1.12	22.4	1.33	24.1	1.59	25.9	1.80
0 BAR	55.6	0.41	64.3	0.64	68.7	0.74	74.7	0.93	78.6	1.12	84.6	1.33	90.6	1.59	96.6	1.80
217 PSI	13.9	2.23	16.1	2.51	17.8	2.93	19.5	3.40	19.9	3.61	21.6	4.06	23.3	4.53	25.0	4.99
15 BAR	52.3	2.23	60.8	2.51	67.1	2.93	73.7	3.40	75.0	3.61	81.4	4.06	87.8	4.53	94.2	4.99
435 PSI	13.6	4.06	15.6	4.65	17.4	5.26	19.1	5.80	19.7	6.23	21.4	6.77	23.1	7.31	24.8	7.85
30 BAR	51.2	4.06	58.7	4.65	65.5	5.26	71.9	5.80	74.3	6.23	80.7	6.77	87.1	7.31	93.5	7.85
580 PSI	13.5	5.22	15.3	6.03	17.2	6.81	18.4	7.51	19.2	8.01	20.4	8.71	22.1	9.41	23.8	10.11
40 BAR	50.8	5.22	57.7	6.03	64.8	6.81	69.4	7.51	72.6	8.01	77.2	8.71	82.0	9.41	86.8	10.11
725 PSI	13.4	6.30	15.0	7.31	16.9	8.33	17.9	9.23	19.0	9.82	20.1	10.72	21.2	11.62	22.3	12.52
50 BAR	50.4	6.30	56.5	7.31	63.9	8.33	67.5	9.23	71.8	9.82	75.4	10.72	79.8	11.62	84.2	12.52

All HP requirements listed in the table are electrical.
For approximate gasoline equivalent, multiply by 1.3.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-D813	20.8	78.7	725	50	550	1-1/4" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male shaft extension
9910-D813GRGI	20.8	78.7	725	50	3600	Assembled with gearbox 9910-KIT1642 and control 9910-VDR50 for mounting on 13 hp gas engine	

High Pressure, 4 Diaphragm

Model 9910-D1064 and D1064GRGI



- Max. fluid temperature: 140°F/60°C
- Shaft: Flanged adapter and 1-3/8" - 6 splined male shaft ext. (D1064); 1" hollow shaft for gas engine mount (D1064GRGI)
- Diaphragms: 4, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-VDR50 or 9910-GS50GI, see page 84.
- Weight: 54 lbs./24.5 kg (D1064); 76 lbs./34.5 kg (D1064GRGI)

Pressure in PSI and BAR	GPM		HP		GPM		HP		GPM		HP		GPM		HP	
	LPM		HP		LPM		HP		LPM		HP		LPM		HP	
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM		Q600 RPM		Q650 RPM		Q700 RPM	
0 PSI	19.6	0.75	22.4	1.04	25.2	1.33	27.1	1.59	28.7	1.90	30.3	2.16	32.0	2.42	33.7	2.68
0 BAR	74.0	0.75	84.6	1.04	95.1	1.33	102.4	1.59	108.5	1.90	114.6	2.16	120.7	2.42	126.8	2.68
217 PSI	18.8	2.95	21.6	3.41	24.5	3.92	26.8	4.33	28.5	4.71	30.3	5.09	32.0	5.47	33.7	5.85
15 BAR	70.8	2.95	81.6	3.41	92.3	3.92	101.1	4.33	107.6	4.71	114.6	5.09	120.7	5.47	126.8	5.85
435 PSI	18.4	5.40	21.1	6.20	23.9	7.01	26.2	7.77	28.3	8.28	30.3	8.79	32.0	9.30	33.7	9.81
30 BAR	69.4	5.40	79.5	6.20	90.3	7.01	98.8	7.77	106.7	8.28	114.6	8.79	120.7	9.30	126.8	9.81
580 PSI	18.2	7.01	21.0	8.05	23.7	9.12	26.0	10.06	28.0	10.79	29.9	11.52	31.9	12.25	33.8	12.98
40 BAR	68.8	7.01	79.2	8.05	89.3	9.12	98.1	10.06	105.8	10.79	113.6	11.52	120.7	12.25	126.8	12.98
725 PSI	18.0	8.65	20.8	9.88	23.3	11.18	25.9	12.38	27.8	13.13	29.7	13.88	31.6	14.63	33.5	15.38
50 BAR	67.9	8.65	78.4	9.88	87.9	11.18	97.6	12.38	104.7	13.13	112.8	13.88	120.7	14.63	126.8	15.38

All HP requirements listed in the table are electrical.
For approximate gasoline equivalent, multiply by 1.3.

Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-D1064	28.7	108.6	725	50	550	1-1/4" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male shaft extension
9910-D1064GRGI	28.7	108.6	725	50	3600	Assembled with gearbox 9910-KIT1642 and control 9910-VDR50 for mounting on 18 hp gas engine	

High Pressure, 5 Diaphragm

Model 9910-D1265



- Max. fluid temperature: 140°F/60°C
- Shaft: flanged adapter and 1-3/8" - 6 splined male shaft ext.
- Diaphragms: 5, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included
- Pump shaft rotation: CW and CCW
- For shaft kits and other drive options, see pages 81-82.
- Recommended control unit: 9910-VDR50 or 9910-GS50GI, see page 84.
- Weight: 67 lbs./30.4 kg

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM	
0 PSI	23.9	1.23	26.9	1.62	29.8	2.10	32.0	2.62	33.4	2.95
0 BAR	90.0	1.23	101.6	1.62	112.6	2.10	120.8	2.62	126.1	2.95
217 PSI	22.8	3.80	26.1	4.44	29.2	5.14	31.7	5.50	33.1	5.81
15 BAR	86.0	3.80	98.3	4.44	110.3	5.14	119.6	5.50	124.9	5.81
435 PSI	22.5	6.91	25.6	7.93	28.8	9.06	31.5	9.64	32.8	10.03
30 BAR	84.8	6.91	96.7	7.93	108.5	9.06	118.9	9.64	123.9	10.03
580 PSI	22.3	9.03	25.4	10.30	28.5	11.61	31.2	12.33	32.7	12.60
40 BAR	84.3	9.03	95.7	10.30	107.5	11.61	117.7	12.33	123.4	12.60
725 PSI	22.2	11.12	25.1	12.61	28.3	14.44	30.9	15.31	31.5	15.41
50 BAR	83.7	11.12	94.8	12.61	106.8	14.44	116.4	15.31	118.7	15.41

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-D1265	33.4	126.4	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male shaft extension

High Pressure, 3 Diaphragm

Model 9910-DBS110 and DBA110



- Max fluid temp: 140°F/60°C
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling:
 - DBS – external bronze manifolds and brass heads
 - DBA – external manifolds and heads in anodized aluminum
- Pump shaft rotation: CW and CCW
- Recommended control unit: 9910-BMH50 or 9910-GH50, see page 84.
- Weight: 114 lbs./51.7 kg (DBS110); 88 lbs./40 kg (DBA110)

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	Q350 RPM		Q400 RPM		Q450 RPM		Q500 RPM		Q550 RPM	
0 PSI	19.2	0.53	21.9	0.60	24.6	0.78	27.3	0.89	30.0	1.12
0 BAR	72.6	0.53	82.8	0.60	93.0	0.78	103.2	0.89	113.1	1.12
217 PSI	18.7	2.91	21.5	3.18	24.2	3.74	27.1	4.02	29.3	4.50
15 BAR	70.7	2.91	81.2	3.18	91.4	3.74	102.1	4.02	110.6	4.50
435 PSI	18.5	5.19	21.2	5.91	24.0	6.51	26.9	7.51	29.0	8.29
30 BAR	69.9	5.19	79.9	5.91	90.7	6.51	101.4	7.51	109.4	8.29
580 PSI	18.4	6.87	20.9	7.66	23.7	8.69	26.4	9.67	28.7	10.71
40 BAR	69.5	6.87	78.9	7.66	89.3	8.69	99.8	9.67	108.2	10.71
725 PSI	18.2	8.43	20.8	9.60	23.5	10.73	25.9	11.90	28.6	13.11
50 BAR	68.7	8.43	78.5	9.60	88.5	10.73	97.7	11.90	108.0	13.11

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-DBS110	30.0	113.6	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male double-ended shaft
9910-DBA110	30.0	113.6	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male double-ended shaft

High Pressure, 3 Diaphragm

Model 9910-DBS140 and DBA140



- Max fluid temp: 140°F/60°C
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling:
 - DBS – external bronze manifolds and brass heads
 - DBA – external manifolds and heads in anodized aluminum
- Weight: 114 lbs./51.7 kg (DBS140); 88 lbs./40 kg (DBA140)
- Pump shaft rotation: CW and CCW
- Recommended control unit: 9910-BMH50 or 9910-GH50, see page 84.
- Weight: 114 lbs./51.7 kg (DBS140); 88 lbs./40 kg (DBA140)

Pressure in PSI and BAR	GPM		HP		GPM		HP		GPM		HP		GPM		HP		GPM		HP	
	LPM		HP		LPM		HP		LPM		HP		LPM		HP		LPM		HP	
	@350 RPM		@400 RPM		@450 RPM		@500 RPM		@550 RPM											
0 PSI	25.1	0.82	28.5	1.11	31.5	1.50	34.8	2.02	37.8	2.58										
0 BAR	94.6	0.82	107.5	1.11	119.0	1.50	131.5	2.02	142.6	2.58										
217 PSI	24.1	3.47	27.5	4.01	30.7	4.51	33.2	5.01	37.3	5.61										
15 BAR	91.1	3.47	103.8	4.01	115.9	4.51	125.3	5.01	140.9	5.61										
435 PSI	23.8	6.53	27.2	7.69	30.2	8.39	32.6	9.28	36.7	10.34										
30 BAR	89.9	6.53	102.8	7.69	114.1	8.39	123.1	9.28	138.7	10.34										
580 PSI	23.6	8.53	26.8	9.73	29.8	10.82	32.2	12.02	36.5	13.33										
40 BAR	89.1	8.53	101.0	9.73	112.6	10.82	121.5	12.02	137.6	13.33										
725 PSI	23.3	10.47	26.5	11.88	29.7	13.28	31.9	14.67	36.3	16.28										
50 BAR	88.1	10.47	100.0	11.88	112.2	13.28	120.4	14.67	137.0	16.28										

All HP requirements listed in the table are electrical.
For approximate gasoline equivalent, multiply by 1.3.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-DBS140	37.8	143.1	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male double- ended shaft
9910-DBA140	37.8	143.1	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male double- ended shaft

High Pressure, 4 Diaphragm

Model 9910-DBS160 and DBA160



- Max fluid temp: 140°F/60°C
- Diaphragms: 4, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling:
 - DBS – external bronze manifolds and brass heads
 - DBA – external manifolds and heads in anodized aluminum
- Pump shaft rotation: CW and CCW
- Recommended control unit: 9910-BMH50 or 9910-GH50, see page 84.
- Weight: 143 lbs./64.9 kg (DBS160); 112 lbs./50.9 kg (DBA160)

Pressure in PSI and BAR	GPM		HP		GPM		HP		GPM		HP		GPM		HP		GPM		HP	
	LPM		HP		LPM		HP		LPM		HP		LPM		HP		LPM		HP	
	@350 RPM		@400 RPM		@450 RPM		@500 RPM		@550 RPM											
0 PSI	25.5	1.12	29.3	1.52	32.6	1.83	36.1	2.23	39.6	2.62										
0 BAR	96.3	1.12	110.4	1.52	122.9	1.83	136.3	2.23	149.4	2.62										
217 PSI	24.9	3.72	28.7	4.39	32.1	4.83	35.7	5.27	39.1	5.91										
15 BAR	94.1	3.72	108.4	4.39	121.3	4.83	134.8	5.27	147.5	5.91										
435 PSI	24.6	6.90	28.3	8.01	31.9	8.89	35.3	9.80	38.5	10.75										
30 BAR	93.0	6.90	106.6	8.01	120.5	8.89	133.4	9.80	145.3	10.75										
580 PSI	24.5	8.88	28.1	10.22	31.5	11.49	35.0	12.77	38.4	14.12										
40 BAR	92.4	8.88	106.1	10.22	118.9	11.49	132.2	12.77	144.9	14.12										
725 PSI	24.2	10.91	27.9	12.46	31.3	14.01	34.8	15.64	38.2	17.28										
50 BAR	91.4	10.91	105.3	12.46	118.2	14.01	131.5	15.64	144.2	17.28										

All HP requirements listed in the table are electrical. For approximate gasoline equivalent, multiply by 1.3.

Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-DBS160	39.6	149.9	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male double- ended shaft
9910-DBA160	39.6	149.9	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8" - 6 splined male double- ended shaft

High Pressure, 4 Diaphragm

Model 9910-DBS200 and DBA200



- Max fluid temp: 140°F/60°C
- Diaphragms: 4, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling:
 - DBS – external bronze manifolds and brass heads
 - DBA – external manifolds and heads in anodized aluminum
- Pump shaft rotation: CW and CCW
- Recommended control unit: 9910-GH50, see page 84.
- Weight: 143 lbs./64.9 kg (DBS200); 112 lbs./50.9 kg (DBA200)

Order Information

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
	@350 RPM		@400 RPM		@450 RPM		@500 RPM		@550 RPM	
0 PSI	33.0	1.44	37.3	1.92	41.6	2.74	45.9	3.03	49.7	3.67
0 BAR	124.5	1.44	140.7	1.92	156.9	2.74	173.1	3.03	187.6	3.67
217 PSI	32.0	4.68	36.7	5.38	41.0	6.13	45.3	6.91	49.1	7.64
15 BAR	120.8	4.68	138.5	5.38	154.8	6.13	170.8	6.91	185.4	7.64
435 PSI	31.4	8.79	36.1	10.24	40.4	11.44	44.8	12.71	48.7	13.92
30 BAR	118.4	8.79	136.2	10.24	152.6	11.44	169.0	12.71	183.9	13.92
580 PSI	31.3	11.35	35.8	13.01	40.0	14.69	44.6	16.45	48.3	17.98
40 BAR	118.2	11.35	135.0	13.01	151.1	14.69	168.3	16.45	182.5	17.98
725 PSI	31.1	14.01	35.3	15.96	39.9	18.12	44.4	20.21	48.2	22.21
50 BAR	117.2	14.01	133.1	15.96	150.5	18.12	167.5	20.21	182.1	22.21

All HP requirements listed in the table are electrical.
For approximate gasoline equivalent, multiply by 1.3.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Port Size	Shaft Output
9910-DBS200	49.7	188.1	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8"- 6 splined male double-ended shaft
9910-DBA200	49.7	188.1	725	50	550	1-1/2" HB inlet, 3/4" NPT outlet	1-3/8"- 6 splined male double-ended shaft

Gas Engine-Driven, Medium Pressure, 2 Diaphragm

Models: D252GRGI-25, D252GRGI-55, 1534



- Closed-coupled, gas engine driven (EPA & CARB certified)
- Max. fluid temperature: 140°F/60°C
- Diaphragms: 2, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included

Order Information

Pressure in PSI and BAR	GPM
LPM	
0 PSI	5.9
0 BAR	22.3
50 PSI	5.3
3.4 BAR	20.0
100 PSI	5.2
6.9 BAR	19.5
150 PSI	5.1
10.3 BAR	19.3
200 PSI	5.0
13.6 BAR	18.9
250 PSI	4.9
17.0 BAR	18.5
290 PSI	4.9
20 BAR	18.5

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Control Unit and Gearbox	Engine Mfr. and hp
D252GRGI-25	5.9	22.3	290	20	3600	9910-KIT1990	PowerPro 2.5 hp
D252GRGI-55	5.9	22.3	290	20	2800	9910-KIT1990	PowerPro 6.5 hp
1534	5.9	22.3	290	20	2800	9910-KIT1990	Briggs and Stratton® 3.5 hp

Desmopan® is a registered trademark of Bayer Aktiengesellschaft, Farbenfabriken. Hypro® is a registered trademark of Pentair.

Gas Engine-Driven, Medium Pressure, 2 Diaphragm

Model: D30HRGI-65, D30HRGI-65E, D30GRGI-65, 1535, D30HRGI



- Closed-coupled, gas engine driven (EPA & CARB certified)
- Max. fluid temperature: 140°F/60°C
- Diaphragms: 2, semi-hydraulic, Desmopan® standard, Buna available
- Housing components for liquid handling: epoxy-coated


Order Information

Pressure in PSI and BAR	D30HRGI-65,65E	D30GRGI-65,1535
	GPM	GPM
	LPM	LPM
	@550 RPM	@550 RPM
0 PSI	9.6	9.3
0 BAR	36	35
290 PSI	8.8	9.3
20 BAR	33	34
435 PSI	8.6	8.7
30 BAR	33	33
580 PSI	8.3	8.2
40 BAR	31	31

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Control Unit and Gearbox	Engine Mfr. and hp
D30HRGI-65	9.6	36.3	580	40	3600	GS40GI and 8000-0056	PowerPro 6.5 HP
D30HRGI-65E	9.6	36.3	580	40	3600	GS40GI and 8000-0056	PowerPro 6.5 HP w/ electric start
D30GRGI-65	9.6	36.3	580	40	3600	GS40GI and KIT1640 (gearbox)	PowerPro 6.5 hp
1535	9.3	35.2	580	40	3600	GS40GI and KIT1640 (gearbox)	Industrial Plus Briggs & Stratton® 6.5 hp
D30HRGI	9.3	35.2	580	40	3600	GS40GI and KIT1640 (gearbox)	Less engine

Gas Engine-Driven, Medium Pressure, 3 Diaphragm

Model: D403HRGI-65, D403HRGI-65E, D403GRGI-65, D403HRGI

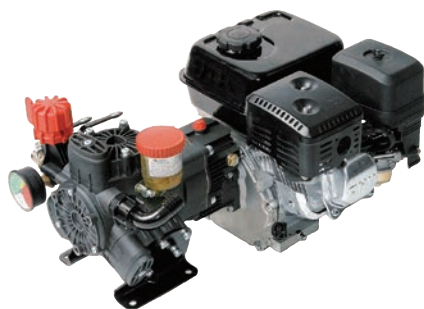

- Closed-coupled, gas engine driven (EPA & CARB certified)
- Max. fluid temperature: 140°F/60°C
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available
- Housing: anodized aluminum
- Mounting base: included

Order Information

Pressure in PSI and BAR	D403HRGI-65,65E	D403GRGI-65
	GPM	GPM
	LPM	LPM
	@550 RPM	@550 RPM
0 PSI	9.9	10.6
0 BAR	38	40
290 PSI	9.7	9.8
20 BAR	37	37
435 PSI	9.6	9.7
30 BAR	36	37
580 PSI	9.5	9.5
40 BAR	36	36

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Control Unit and Gearbox	Engine Mfr. and hp
D403HRGI-65	9.9	37.5	580	40	3600	GR40 and 8000-0056	PowerPro 6.5 HP
D403HRGI-65E	9.9	37.5	580	40	3600	GR40 and 8000-0056	PowerPro 6.5 HP w/ electric start
D403HRGI	9.9	37.5	580	40	3600	GR40 and 8000-0056	Less engine
D403GRGI-65	10.6	40.1	580	40	3600	GR40 and KIT1640 (gearbox)	PowerPro 6.5 hp

Gas Engine-Driven, Heavy-Duty Medium Pressure, 3 Diaphragm

Model: D503HRGI-65, D503HRGI



- Hypro quality diaphragm pumps powered by field-proven PowerPro certified engines (EPA & CARB certified)
- Oil-bath design and premium quality synthetic diaphragms provides longer life and greater reliability
- Oil-bath design also allows pump to be run dry
- Self-priming operation
- Corrosive, abrasive and general use chemical compatibility
- Visual oil-level sight glass
- Supported with a one-year Hypro warranty on both pump and PowerPro engine
- Diaphragms: 3, semi-hydraulic, Desmopan® standard, Buna available

Order Information

Pressure in PSI and BAR	D503HRGI-65,65E
	GPM
	LPM
	@550 RPM
0 PSI	14.3
0 BAR	54
145 PSI	14.1
10 BAR	53
290 PSI	13.8
20 BAR	52

Model Number	Max GPM	Max GPM	Max PSI	Max BAR	Max RPM	Control Unit & Gearbox	Engine Mfr. & HP
D503HRGI-65	14.3	54.1	290	20	3600	RM40 and 8000-0056	PowerPro 6.5 HP
D503HRGI-65E	14.3	54.1	290	20	3600	RM40 and 8000-0056	PowerPro 6.5 HP w/ electric start
D503HRGI	14.3	54.1	290	20	3600	RM40 and 8000-0056	Less engine

Diaphragm Kits and Applications



Hypro Pump Oil

Part Number	Description	Weight	
		US Units	Metric
2160-0038	1 quart of specially-formulated pump oil	2 lbs.	907 g
2160-0047	1 gallon of specially-formulated pump oil	9 lbs.	4.1 kg
2160-0048	2 1/2 gallons of specially-formulated pump oil	22 lbs.	9.98 kg

All Hypro Plunger Pumps are shipped with oil. To optimize pump life, Hypro recommends an oil change after 40 hours of break-in operation and every three months or 500 hour intervals thereafter. Use only Hypro oil.



1-3/8"-6 Spline Female PTO Shaft Kits

Kit Number	Description	Weight	
		US Units	Metric
9910-KIT1704	For Model 9910-D50, D30, D303 and D403 pumps	7 lbs.	3.2 kg
9910-KIT1708	For Model 9910-D70 and D115 pumps	5.25 lbs.	2.4 kg
9910-KIT2204	For Model 9910-D503, D813, D1064 and D1265 pumps	7 lbs.	3.2 kg

Kit includes a female PTO coupler and retaining clamp, torque arm and mounting bracket, chains and necessary hardware.



1-3/8"-6 Spline Male PTO Shaft Kits

Kit Number	Description	Weight	
		US Units	Metric
9910-KIT1702	For Model 9910-D30 pump	3 lbs.	1.4 kg
9910-KIT1706	For Model 9910-D50 pump	4.25 lbs.	1.9 kg
*9910-KIT1710	For Model 9910-D70 and D115 pumps	5.5 lbs.	2.5 kg
9910-KIT2200	For Model 9910-D503, D303 and D403 pumps	4.25 lbs.	1.9 kg
9910-KIT2201	For Model 9910-D813, D1064 and D1265 pumps	4.25 lbs.	1.9 kg


*Kit includes a male PTO shaft adapter, mounting bracket and necessary hardware.



1" Solid Shaft Kits

Kit Number	Description	Weight	
		US Units	Metric
9910-KIT1703	For Model 9910-D30 pump	2.5 lbs.	1.7 kg
9910-KIT1707	For Model 9910-D50 pump	3.75 lbs.	1.7 kg
*9910-KIT1711	For Model 9910-D70 and D115 pumps	5 lbs.	2.3 kg
9910-KIT2202	For Model 9910-D503, D303 and D403 pumps	3.75 lbs.	1.7 kg
9910-KIT2203	For Model 9910-D813, D1064 and D1265 pumps	3.75 lbs.	1.7 kg

*Kit includes a male PTO shaft adapter, mounting bracket and necessary hardware.



Base Plates and Carrying Handles

Part Number	Description	Ref.	Est. Weight Ea.	
			US Units	Metric
1510-0005	8" x 15" with 12 gauge	A	6 lbs.	2.7 kg
1510-0002	9 1/2" x 18" with 10 gauge	A	8 lbs.	3.6 kg
1510-0001	12" x 21" with 7 gauge	A	16 lbs.	7.3 kg
1510-0016	14" x 26" with 7 gauge	A	21 lbs.	9.5 kg
1510-0075	9-1/2" x 4-1/2" with 14 gauge (for 3 and 5 hp Briggs® or Honda® and 56 frame electric)	B	11 lbs.	5 kg
2801-0001	Two handles, mounting bolts and nuts for #1510-0016 base	C	3 lbs. 4 oz.	1.5 kg
2801-0002	Two handles, mounting bolts and nuts for #1510-0001 base	C	3 lbs. 3 oz.	1.4 kg

Diaphragm Pump Repair Kits

For Pump Model	Diaphragm Kit (Desmopan®)	Diaphragm Kit (Buna-N)	Valve Kit	O-ring Kit
9910-D70	9910-KIT1720	-----	9910-KIT2364	9910-KIT2365
9910-D115 and D135	9910-KIT1721	-----	9910-KIT2370	9910-KIT2026
9910-D160	9910-KIT1730	-----	9910-KIT2374	9910-KIT1908
9910-D250	9910-KIT1722	-----	9910-KIT2114	9910-KIT1904
9910-D12GRGI	9910-KIT1882	-----	9910-KIT1992	
9910-D503	9910-KIT1881	-----	9910-KIT1987	9910-KIT1984
9910-D252 (all versions)	9910-KIT1723	-----	9910-KIT2408	9910-KIT2409
9910-D30 (all versions)	9910-KIT1724	9910-KIT2110	9910-KIT1917	9910-KIT1916
9910-D50	9910-KIT1725	9910-KIT2111	9910-KIT1920	9910-KIT1919
9910-DBS110, DBS140, DBA110 and DBA140	-----	9910-KIT2444	9910-KIT2445	9910-KIT2446
9910-DBS160, DBS200, DBA160 and DBA200	-----	9910-KIT2456	9910-KIT2374	9910-KIT2457
9910-D303	9910-KIT2423	-----	9910-KIT2388	9910-KIT2389
9910-D403	9910-KIT2423	-----	9910-KIT2388	9910-KIT2389
9910-D813	9910-KIT2479	-----	9910-KIT1963	9910-KIT2376
9910-D1064	9910-KIT2480	-----	9910-KIT1964	9910-KIT2378
9910-D1265	9910-KIT2100	-----	9910-KIT2024	9910-KIT2347
9910-D1554	9910-KIT1734	-----	9910-KIT1965	9910-KIT1972
9910-D1516	9910-KIT2113	-----	9910-KIT2053	9910-KIT2349

Honda® is a registered trademark of Honda Motor Co., Ltd. Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation. Hypro® is a registered trademark of Pentair Ltd.

Pump and Gear Reduction Kits



Model 9910-KIT1640

- For Pump Models 9910-D30, D303 and D403
- 6:1 gear box
- For standard 5.5 hp gas engine with 3/4" shaft
- Can be used with 9910-D50, D503 and D813, providing that pumps are operated at lower pressures that do not exceed 5 hp gas engine compatibility.
- Weight: 6.5 lbs./2.9 kg



Model 9910-KIT1642


- For Pump Models 9910-D50, D503, D813, D1064 and D1265
- 6:1 gear box
- For standard 8-18 hp gas engine with 1" shaft
- Weight: 8.5 lbs./3.9 kg



Model 8000-0056

- For Pump Models 9910-D30, D403, D50, and D503
- New and improved bolt-through pinion gear to help prevent keyway fretting and seizing
- Engine mounting flange designed for ease of assembly with standard tools
- Robust 6:1 gear design for increases longevity
- Increased oil capacity
- Made for use on gas engines with 3/4" shaft
- Available pre-assembled on HRGI models

Hydraulic Flange Kits




Model 9910-HYD5312

- Hydraulic motor mounting flange kit
- Fits Diaphragm Pump Models 9910-D30, D50, D303, D403, D503, D813, D1064 and D1265
- Includes: one flange with SAE "A" 2 bolt, one 1" hollow shaft and two bolts
- Weight: 5.5 lbs./2.5 kg



Model 9910-HYD1570

- Hydraulic motor mounting flange kit
- Fits Diaphragm Pump Models 9910-D160 and D250
- Includes: one flange with SAE "A" 2 bolt, one coupling and hardware for mounting
- Weight: 2.5 lbs./1.1 kg

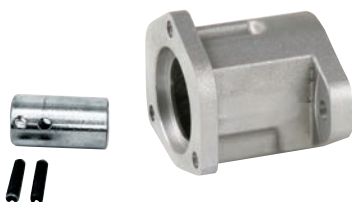

Model 9910-HYD2495

- Hydraulic motor mounting flange kit
- Fits Diaphragm Pump Models 9910-D70, D115
- Includes: one flange with SAE "A" 2 bolt, one coupling, two pins, spacer and hardware for mounting
- Weight: 5.5 lbs./2.5 kg



Model 9910-GS25

- Control unit for 9910-DP423
- Includes: pressure gauge, adjustable high pressure relief valve, 1/2" HB outlet with ball valve shutoff, bypass lever, 3/4" HB bypass, and 1" HB inlet
- Max. flow: 11 gpm/42 lpm
- Max. pressure: 290 psi/20 Bar
- Weight: 2 lbs./0.9 kg



Model 9910-GS35S

- Control Unit for 9910-DP573 and 9910-DP763
- Includes: Pressure gauge, adjustable high pressure relief valve, two 1/2" HB outlet with ball valve shutoff, bypass lever, 3/4" HB bypass, 1" HB inlet
- Max. flow: 24 gpm/90.8 lpm
- Max. pressure: 290 psi/20.0 bar
- Weight: 3 lbs./1.4 kg



Model 9910-KIT1990

- Control unit for mounting on Pump Model 9910-D252
- Includes: one adjustable relief valve, one pressure/bypass selector
- 5/8" HB bypass port and 3/8" HB outlet
- Max. flow: 6 gpm/22.7 lpm
- Max. pressure: 290 psi/20.0 bar
- Weight: 1 lb./0.5 kg



Model 9910-GS40GI

- Control unit for mounting on Pump Models 9910-D30 and D50
- Includes: pressure gauge, one adjustable high pressure relief valve, one complete bypass lever, two 1/2" HB outlets with individual shut-offs, and 3/4" hose barb bypass
- Max. flow: 21 gpm/79.5 lpm
- Max. pressure: 580 psi/40.0 bar
- Remote mounting kit: 9910-KIT1741
- Remote mounting kit weight: 1 lb./0.5 kg
- Weight: 3.5 lbs./1.6 kg



Model 9910-GR40

- Control unit for Pump Models 9910-D303 and D403
- Includes: pressure gauge, adjustable high pressure relief valve, complete bypass lever, 2-1/2" pressure gauge, two 1/2" hose barb outlets with individual shut-offs, and 5/8" hose barb bypass
- Max. flow: 11 gpm/41.6 lpm
- Max. pressure: 580 psi/40.0 bar
- Remote mounting kit: 9910-KIT1741
- Remote mounting kit weight: 1 lb./0.5 kg
- Weight: 2 lbs./0.9 kg



Model 9910-RM40

- Remote control unit for mounting on Pump Model 9910-D503
- Includes: pressure gauge, one adjustable high pressure relief valve, one complete bypass knob, two 1/2" HB outlets with individual shut-offs, and 1" hose barb bypass
- Max. flow: 24 gpm/90.8 lpm
- Max. pressure: 580 psi/40.0 bar
- Remote mounting kit: 9910-KIT1897 (Includes: mounting bracket, bolts, and hose barb)
- Remote mounting kit weight: 2 lbs./0.9 kg
- Weight: 3.5 lbs./1.6 kg

Diaphragm Control Units



Model 9910-GS50GI

- Remote control unit for Pump Models 9910-D813, D1064, D1265 and D1516
- Includes: pressure gauge, one adjustable high pressure relief valve, one complete bypass lever, three 1/2" HB outlets with individual shut-offs, and 1" hose barb bypass
- Max. flow: 48 gpm/181.7 lpm
- Max. pressure: 725 psi/50.0 bar
- Remote mounting kit: 9910-KIT1742 (Includes: mounting bracket, bolts, and hose barb)
- Remote mounting kit weight: 1 lb./0.5 kg
- Weight: 8.5 lbs./3.6 kg



Model 9910-VDR50

- Control unit for mounting on Pump Models 9910-D813, D1064 and D1265
- Includes: pressure gauge, one adjustable high pressure relief valve, one complete bypass lever, two 1/2" HB outlets with individual shut-offs, and 1" hose barb bypass
- Max. flow: 35 gpm/132.5 lpm
- Max. pressure: 725 psi/50.0 bar
- For additional ball valve, order Part Number 9910-130491
- Weight: 3.5 lbs./1.6 kg



Model 3300-0087, 0088

- Remote control unit for Pump Models 9910-D70, D115, D135 and D160
- Includes: one built-in relief valve, one 1" HB inlet, three 3/4", 1/2" and 3/8" HB outlets with individual shut-offs
- Model-0088 includes a main bypass lever
- Max. flow: 42.5 gpm/160.9 lpm
- Max. pressure: 290 psi/20.0 bar
- Weight: 7 lbs./3.2 kg (Model 3300-0087); 7.75 lbs./3.5 kg (Model 3300-0088)



Model 3300-0082

- Remote control unit for Pump Model 9910-D250
- Includes: pressure gauge, one built-in adjustable relief valve, one main shut-off and complete bypass lever, four 3/4" HB outlets with individual shut-offs, and 1-1/2" hose barb bypass
- Max. flow: 66 gpm/249.8 lpm
- Max. pressure: 290 psi/20.0 bar
- Weight: 18 lbs./8.2 kg



Model 9910-BMH50

- Control unit for Pump Models 9910-DBS110, 9910-DBA110, DBS140, DBA140, DBS160, DBA160, DBS200 and DBA200
- Includes: directional control unit with working pressure regulating valve, single lever for partial or total closure and discharge and glycerine-bath pressure gauge with colored dial
- Max flow: 41 gpm/155.2 lpm
- Max. pressure: 725 psi/50.0 bar
- Weight: 6.6 lbs./3.0 kg



Model 9910-GH50

- Control unit for Pump Models 9910-DBS110, 9910-DBA110, DBS140, DBA140, DBS160, DBA160, DBS200 and DBA200
- Includes: working pressure regulating valve, bypass control lever and glycerine-bath pressure gauge with colored dial
- Max. flow: 52.8 gpm/200 lpm
- Max. pressure: 725 psi/50.0 bar
- Weight: 8.25 lbs./3.7 kg

SHURflo® 5000 Series Diaphragm Pump

5 GPM Bypass and Automatic-Demand Pumps 12 VDC



The field-proven SHURflo 5.3 gpm [20.1 L/min] pump delivers 3.8 gpm at 40 psi [14.4 L/min at 2.75 bar] with current draw of 14 amps. This pump is designed with a Santoprene® diaphragm for chemical resistance and maximum life, as well as Viton® valves for maximum chemical resistance. Also included is a built-in pressure switch, set at 60 PSI [4.14 bar], which protects the pump in the event of dead-heading. The pump is available in the same footprint as other SHURflo pumps, allowing users to upgrade to a higher performance on existing installations.

- Field-proven pump head design
- Driven by a 12-volt, sealed motor
- Self-priming up to 8 feet [2.4 m]
- Santoprene® diaphragm for chemical resistance and maximum life
- Viton® valves provide maximum chemical resistance
- Automatic demand versions with built-in pressure switch, set at 60 psi [4.14 bar], protects the pump in the event of dead-heading
- Bypass versions set at 90 psi (5.86 bar), protects the pump in the event of dead heading
- Available in the same footprint as other SHURflo pumps, allowing users to upgrade to a higher performance on existing installations

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw
5059-1311-D011	5.3	20.1	60	3.4	1/2" npsm*	17.0
5059-1310-D011	5.3	20.1	60	3.4	1/2" NPTF	17.0
5059-3611-D011	5.3	20.1	90	6.2	1/2" npsm*	20.9
5059-3610-D011	5.3	20.1	90	6.2	1/2" NPTF	20.9

* 1/2" -14 American National Standard Straight Pipe Thread

** For retail box: change "-D011" to "-D012"

Model	PSI	GPM	BAR	L/min	Amps
5059-1311-D011 5059-1310-D011	0	5.3	0	20.1	6.5
	10	4.7	.69	17.8	9.0
	20	4.3	1.38	16.3	11.8
	30	4.1	2.07	15.5	12.4
	40	3.8	2.75	14.4	14.0
	50	3.6	3.45	13.6	15.4
	60	3.4	4.14	12.9	17.0
5059-3611-D011 5059-3610-D011	0	5.3	0	20.1	6.5
	10	4.7	.7	17.8	9.0
	20	4.3	1.4	16.3	10.2
	30	4.1	2.1	15.5	12.0
	40	3.4	2.8	12.9	13.5
	50	2.6	3.4	9.8	15.2
	60	1.8	4.1	6.8	16.9

SHURflo® 8000 Series Diaphragm Pump

Automatic-Demand Pumps 12 VDC



The 8000 Series diaphragm pump is SHURflo's most widely used agriculture pump. Viton® valve material assures maximum chemical resistance. The unique conical valve design delivers high flow rates at maximum discharge pressures, making the 8000 Series the pump of choice for sprayers used on the farm or around the yard. These 12 VDC pumps deliver up to 1.8 GPM [6.8 L/min] providing maximum performance in a wide range of applications.

- Self-priming up to 8 vertical feet [2.4m]
- Chemical-resistant materials
- Designed for heavy-duty spraying and fluid transfer applications
- Can run dry without damage
- Built-in check valve

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8000-343-236	1.2	4.5	60	4.1	3/8" NPT-Female	5.8	All Viton® Pump: Viton® valves, Viton® diaphragm, 60 PSI (4.1 bar) demand switch
8000-541-236*	1.0	3.8	60	4.1	3/8" NPT-Female	3.8	Lawn and Garden Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch
8000-542-136	1.2	4.5	60	4.1	1/2" MSPT-Male	6.0	Low Flow Standard Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch
8000-543-136	1.8	6.8	60	4.1	1/2" MSPT-Male	7.3	Standard Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch
8000-543-236*	1.8	6.8	50	3.4	3/8" NPT-Female	6.4	Standard Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch
8000-543-238	1.8	6.8	100	6.9	3/8" NPT-Female	8.7	High Pressure Pump: Viton® valves, Santoprene® diaphragm, 100 PSI (6.9 bar) demand switch
8000-543-138	1.8	6.8	100	6.9	1/2" MSPT-Male	8.7	High Pressure Pump: Viton® valves, Santoprene® diaphragm, 100 PSI (6.9 bar) demand switch
8000-543-936*	1.8	6.8	50	3.4	3/8" NPT-Female	6.4	Standard Pump w/Wire Harness: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch, prewired with two wire molded connectors,
8000-643-236	1.8	6.8	60	4.1	3/8" NPT-Female	6.8	Transfer Pump: Buna valves, Geolast® diaphragm, 60 PSI (4.1 bar) demand switch
8030-813-239	1.6	6.1	150	9.5	3/8" NPT-Female	12.0	High Pressure Pump: Viton® valves, Santoprene® diaphragm, 150 PSI (10.3 bar) demand switch

Model	PSI	BAR	GPM	L/min	Amps
8000-343-236	20	1.4	0.93	3.5	3.9
	40	2.8	0.84	3.2	4.9
	50	3.4	0.80	3.0	5.3
	60	4.1	0.76	2.9	5.8
8000-541-236	20	1.4	0.79	3.0	2.3
	30	2.1	0.75	2.8	2.8
	40	2.8	0.70	2.6	3.2
	60	4.1	0.62	2.3	3.8
8000-542-136	20	1.4	1.11	4.2	4.1
	40	2.8	0.98	3.7	5.1
	50	3.4	0.93	3.5	5.6
	60	4.1	0.90	3.4	6.0
8000-543-136	20	1.4	1.26	4.7	5.0
	40	2.8	1.14	4.3	6.2
	50	3.4	1.08	4.1	6.8
	60	4.1	1.02	3.9	7.3
8000-543-236	30	1.4	1.47	5.5	5.7
	40	2.8	1.41	5.3	5.8
	50	3.4	1.36	5.1	6.4
8000-543-238	20	1.4	1.45	5.5	4.2
	40	2.8	1.31	5.0	5.5
	60	4.1	1.22	4.6	6.5
	100	6.9	0.96	3.6	8.7
8000-543-138	20	1.4	1.45	5.5	4.2
	40	2.8	1.31	5.0	5.5
	60	4.1	1.22	4.6	6.5
	100	6.9	0.96	3.6	8.7
8000-543-936	30	1.4	1.47	5.5	5.7
	40	2.8	1.41	5.3	5.8
	50	3.4	1.36	5.1	6.4
8000-643-236	20	1.4	1.44	5.4	4.1
	40	2.8	1.33	5.0	5.4
	50	3.4	1.27	4.8	6.1
	60	4.1	1.22	4.6	6.8
8030-813-239	20	1.4	1.55	5.9	5.5
	30	2.1	1.49	5.6	6.2
	40	2.8	1.43	5.4	6.8
	80	5.4	1.20	4.5	9.1
	100	6.9	1.10	4.2	10.1
	150	9.5	0.83	3.1	12.0

* Packaged in quantities of 6. For single packs, replace "8000-" with "8009."

SHURflo® 8000 Series Diaphragm Pumps

Bypass Pumps 12 VDC



8000-543-250

8000 Series internal bypass pumps are ideal for applications where an automatic demand switch is not desired. Pumps with bypass will continue to run without damage once the bypass pressure is reached. They incorporate a triple chamber design with Viton® elastomers to withstand the toughest applications. Perfect for spot sprayers, foam markers and transfer applications where smooth, consistent flow is needed.

- Self-priming up to 8 vertical feet [2.4m]
- Chemical-resistant materials
- Internal bypass
- Can run dry without damage

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8000-543-250*	1.8	6.8	50	3.4	3/8" NPT-Female	5.5	Standard Bypass Pump: Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 BAR) internal bypass
8000-543-210	1.3	4.9	40	2.8	3/8" NPT-Female	5.5	Standard Bypass Pump: Viton® valves, Santoprene® diaphragm, 35 PSI (2.4 BAR) internal bypass
8000-543-220	1.5	5.7	60	4.1	3/8" NPT-Female	7.1	Standard Bypass Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 BAR) internal bypass
8006-543-250	1.4	5.3	50	3.4	3/8" NPT-Female	5.5	Bypass Pump with Reversed Pumphead: Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 BAR) internal bypass

* Packaged in quantities of 6. For single packs, replace "8000-" with "8009-".

Model	PSI	BAR	GPM	L/min	Amps
8000-543-250	20	1.4	1.30	4.9	4.0
	30	2.1	1.11	4.2	4.7
	40	2.8	0.69	2.6	5.2
	50	4.1	0.18	0.7	5.5
8000-543-210	10	0.7	1.28	4.8	3.8
	20	1.4	1.19	4.5	4.4
	30	2.1	1.07	4.0	5.0
	40	2.8	0.05	0.19	5.5
8000-543-220	10	0.7	1.52	5.7	3.8
	20	1.4	1.45	5.5	4.5
	30	2.1	1.39	5.3	5.2
	60	4.1	1.12	4.2	7.1
8006-543-250	10	0.7	1.40	5.3	3.4
	20	1.4	1.30	4.9	4.0
	40	2.8	0.69	2.6	5.2
	50	4.1	0.18	0.7	5.5

SHURflo 8000 Series Diaphragm Pumps

Bypass Pumps 12 VDC



8000-543-290

Designed to accommodate applications that have external pressure valves plumbed into the system.

- Self-priming up to 8 vertical feet [2.4m]
- Chemical-resistant materials
- 1/4" adapter for external bypass hook-up
- Can run dry without damage

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8000-543-290	1.8	6.8	100	6.9	3/8" NPT-Female	8.8	Front Adapter Pump: Viton® valves, Santoprene® diaphragm, 1/4" FNPT adapter mounted on switch ports

Model	PSI	BAR	GPM	L/min	Amps
8000-543-290	20	1.4	1.26	4.7	5.0
	40	2.8	1.14	4.3	6.2
	60	4.1	1.02	3.9	7.3
	80	5.5	0.93	3.5	8.0
	100	6.9	0.84	3.2	8.8

SHURflo® 8000, 8090 and 8020 Series Diaphragm Pumps

Bypass and Automatic-Demand Pumps 115 VAC and 230 VAC



8020-833-238

8000-533-250

These SHURflo 8000, 8090 and 8020 Series bypass and demand pumps provide the same reliability as the 12 VDC version, except in a 115 VACor 230 VAC capacity. They are ideal in agricultural applications that require high pressure with flow rates up to 1.6 GPM [6.1 L/min] and low amp draw. They can be mounted in any position, are compact, and are designed for easy maintenance.

- Self-priming up to 8 vertical feet [2.4m]
- Built-in check valve
- Chemical-resistant materials
- Corded pump optional
- Can run dry without damage

Order Information - Bypass 115 VAC

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8000-533-250	1.4	5.3	50	3.4	3/8" NPT-Female	0.54	Bypass Pump: Viton® valves, Santoprene® diaphragm, 45 PSI [3.1 bar] Internal Bypass
8020-503-250	1.5	5.7	40	2.8	3/8" NPT-Female	0.56	Bypass Pump with 6' Power Cord: Viton® valves, Santoprene® diaphragm, 45 PSI [3.1 bar] Internal Bypass

Bypass 115 VAC

Model	PSI	BAR	GPM	L/min	Amps
8000-533-250	10	0.7	1.36	5.1	0.34
	30	2.1	1.05	4.0	0.46
	40	2.8	0.65	2.5	0.51
	50	3.4	0.19	0.7	0.54
8020-503-250	10	0.7	1.40	5.3	0.37
	20	1.4	1.30	4.9	0.44
	30	2.1	1.10	4.2	0.50
	40	2.8	0.80	3.0	0.56

Order Information - Demand 115 VAC

Part Numbers	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8000-533-236	1.4	5.3	60	4.1	3/8" NPT-Female	0.64	Standard Demand Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch
8000-513-236	1.5	5.7	60	4.1	3/8" NPT-Female	0.57	Standard Demand Pump: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) demand switch with 6 ft (1.8 m) power cord
8020-833-238	1.6	6.1	100	6.9	3/8" NPT-Female	0.95	High Pressure Pump with 6 ft. Power Cord: Viton® valves, Santoprene® diaphragm, 100 PSI [6.9 bar] demand switch
8030-863-239	1.5	5.7	150	9.7	3/8" NPT-Female	1	High Pressure Pump: Viton® valves, Santoprene® diaphragm, 150 PSI [10.3 bar] demand switch

Demand 115 VAC

Model	PSI	BAR	GPM	L/min	Amps
8000-533-236	20	1.4	1.15	4.3	0.46
	40	2.8	0.97	3.7	0.55
	50	3.4	0.91	3.4	0.60
	60	4.1	0.85	3.2	0.64
8000-513-236	20	1.4	1.15	4.8	0.40
	40	2.8	0.96	4.1	0.49
	50	3.4	0.90	3.6	0.54
	60	4.1	0.84	3.5	0.57
8020-833-238	20	1.4	1.32	5.0	0.45
	40	2.8	1.14	4.3	0.58
	60	4.1	1.07	4.0	0.70
	100	6.9	0.91	3.4	0.95
8030-863-239	20	1.4	1.24	4.7	0.45
	60	4.1	1.04	3.9	0.66
	120	8.3	0.77	2.9	0.92
	150	9.7	0.63	2.4	1.00

Order Information - Bypass 230 VAC

Part Numbers	Max GPM	Max LPM	Max PSI	Max Bar	Port Size	Max Draw	Description
8090-802-289	1.2	4.5	80	5.5	3/8" NPT Female	0.56	Bypass Pump: Viton® valves, Santoprene® diaphragm, 80 PSI [5.5 bar] Internal Bypass
8095-902-260	1.5	5.7	100	6.9	3/8" NPT Female	0.56	Bypass Pump: EPDM valves, Santoprene® diaphragm, 100 PSI [6.9 bar] Internal Bypass

Order Information - Demand & Demand/Bypass 230 VAC

Part Numbers	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8090-212-246	1.2	4.5	60	4.1	3/8" NPT Female	0.34	Standard Demand Pump: EPDM valves, Santoprene® diaphragm, 60 PSI [4.1 bar] demand switch
8090-801-278	1.3	4.9	100	6.9	3/8" NPT Female	0.56	Demand/Bypass Pump: Viton® valves, Santoprene® diaphragm, 80 PSI [5.5 bar] Internal Bypass, 100 PSI [6.9 bar] demand switch
8090-902-278	1.4	5.3	100	5.5	3/8" NPT Female	0.56	Demand/Bypass Pump: EPDM valves, Santoprene® diaphragm, 80 PSI [5.5 bar] Internal Bypass, 100 PSI [6.9 bar] demand switch

SHURflo® 8007 Series Diaphragm Pumps

Bypass and Automatic-Demand 12 VDC with Electrical Package



8007-543-850
(Front and Back Shown)

These models include an aesthetically-pleasing molded assembly, housing a rocker-type manual switch with international on/off switch symbols. Wiring is neatly routed into the molded assembly through form fitting entries and strain relieved inside the housing. Fused versions come with an automotive-type fuse housed under a snug fitting cap marked "fuse." Non-fused versions have a raised section.

- Self-priming up to 8 vertical feet [2.4m]
- Chemical-resistant materials
- Internal bypass option
- Can run dry without damage
- Built-in on/off switch included
- 2 pin connector on power leads
- Available with or without integral fuse
- Rocker switch protected from the elements by a clear boot

Order Information -Bypass 12VDC

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8007-543-850	1.8	6.8	50	3.4	3/8" NPT-Female	5.5	Bypass Pump w/Electrical Package: Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) bypass, Manual on/off switch 2 pin connector and fuse
8007-593-850	1.8	6.8	50	3.4	3/8" NPT-Female	5.5	Bypass Pump w/Electrical Package: Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) bypass, Manual on/off switch 2 pin connector

Bypass 12VDC

Model	PSI	BAR	GPM	L/min	Amps
8007-543-850	10	0.7	1.40	5.3	3.4
	20	1.4	1.30	4.9	4.0
	30	2.1	1.11	4.2	4.7
	40	2.8	0.69	2.6	5.2
	50	3.4	0.18	0.7	5.5
8007-593-850	10	0.7	1.40	5.3	3.4
	20	1.4	1.30	4.9	4.0
	30	2.1	1.11	4.2	4.7
	40	2.8	0.69	2.6	5.2
	50	3.4	0.18	0.7	5.5

Order Information -Demand 12VDC

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
8007-591-236	1.0	3.8	50	3.4	3/8" NPT-Female	3.7	Demand Pump w/Electrical Package: Viton® valves, Santoprene® diaphragm, 60 PSI (4.1 bar) Demand Switch Manual on/off switch 2 pin connector (8007-543-836 includes fuse)
8007-593-836	1.8	6.8	50	3.4	3/8" NPT-Female	6.4	
8007-543-836	1.8	6.8	50	3.4	3/8" NPT-Female	6.4	

Demand 12VDC

Model	PSI	BAR	GPM	L/min	Amps
8007-591-236	30	2.1	0.74	2.8	2.9
	40	2.8	0.69	2.6	3.2
	50	3.4	0.65	2.5	3.7
8007-593-836	30	2.1	1.47	5.5	5.3
	40	2.8	1.41	5.3	5.8
	50	3.4	1.36	5.1	6.4
8007-543-836	30	2.1	1.47	5.5	5.3
	40	2.8	1.41	5.3	5.8
	50	3.4	1.36	5.1	6.4

SHURflo® 2087 Series Diaphragm Pumps

Automatic-Demand Pump 12 VDC with Electrical Package



These models include an aesthetically-pleasing molded assembly, housing a rocker-type manual switch with international on/off switch symbols. Wiring is neatly routed into the molded assembly through form fitted entries and strain relieved inside the housing.

- Self-priming up to 12 vertical feet [3.7m]
- Chemical-resistant materials
- Can run dry without damage
- Rocker switch protected from the elements by a clear boot
- Built-in on/off switch included
- 2 pin connector on power lead

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
2087-593-135 [†]	3	11.4	50	3.4	1/2" MSPT* Male	8	Standard Demand Pump: Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) demand switch

* 1/2" - 14 National American Straight Pipe Thread

[†] Packaged in quantities of 6. For single pack, replace "135" with "435."

Model	PSI	BAR	GPM	L/min	Amps
2087-593-135	10	0.7	2.80	10.6	5.3
	20	1.4	2.69	10.2	5.5
	30	2.1	2.36	8.9	6.7
	40	2.8	2.05	7.8	7.7
	50	3.4	1.42	5.4	8.0

SHURflo 2088 Series Diaphragm Pumps

Automatic-Demand Pump 12 VDC



SHURflo 2088 Series diaphragm pumps deliver reliable performance in high flow, moderate pressure applications. They are used in a variety of spot spraying, multi-tip spraying and fertilizer drip applications that require flows of up to 3.6 GPM [13.6 L/min]. They are available in a variety of chemical-resistant materials.

- Self-priming up to 12 vertical feet [3.7m]
- Chemical-resistant materials
- Can run dry without damage
- Automatic demand
- Built-in check valve (varies by model) prevents back flow of fluid into the solution tank
- Continuous duty motor on fin-cooled version

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
2088-313-145	3.6	13.6	40	2.8	1/2" MSPT* Male	9.5	Standard Pump: with fin cooled motor Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) demand switch
2088-443-144	3.5	13.2	45	3.1	1/2" MSPT* Male	9.1	Standard Pump: Santoprene® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) demand switch
2088-343-135 [†]	3	11.4	40	2.8	1/2" MSPT* Male	7.7	Standard Pump: Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) demand switch

* 1/2" - 14 National American Straight Pipe Thread

[†] Packaged in quantities of 6. For single pack, replace "135" with "435."

Model	PSI	BAR	GPM	L/min	Amps
2088-313-145	10	0.7	3.09	11.7	6.4
	20	1.4	2.82	10.7	7.6
	30	2.1	2.49	9.4	8.7
	40	2.8	2.15	8.1	9.5
2088-443-144	10	0.7	2.83	10.7	5.8
	20	1.4	2.56	9.7	7.0
	30	2.1	2.31	8.7	8.0
	40	2.8	2.02	7.6	9.1
2088-343-135	10	0.7	2.80	10.6	5.3
	20	1.4	2.69	10.2	5.5
	30	2.1	2.36	8.9	6.7
	40	2.8	2.05	7.8	7.7

SHURflo® 2088 Series Diaphragm Pumps

No Control Pumps 12 VDC



2088-343-500

SHURflo 2088 Series diaphragm pumps deliver reliable performance in high flow, moderate pressure applications. They are used in a variety of spraying and transferring applications that require flows of up to 3.3 GPM [12.5 L/min]. They are available in a variety of chemical-resistant materials. They can be mounted in any position and are designed for easy maintenance.

- Self-priming up to 12 vertical feet [3.7m]
- Chemical-resistant materials
- Can run dry without damage
- Built-in check valve (may vary by models) prevents back flow of fluid through the pump

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
2088-343-170	3.3	12.5	50	3.4	1/2" MSPT* Male	9.1	Front Adapter Pump with Electrical Package: Viton® valves, Santoprene® diaphragm, 1/4" FPT adapter mounted on switch port, built-in on/off power switch, fuse holder pre-wired w/2-wire molded connector, no demand switch
2088-343-500	3.3	12.5	50	3.4	1/2" MSPT* Male	10.1	Front Adapter Pump: Viton® valves, Santoprene® diaphragm, 1/4" FPT adapter mounted on switch port, no demand switch

* 1/2" - 14 National American Straight Pipe Thread

Model	PSI	BAR	GPM	L/min	Amps
2088-343-170	10	0.7	3.00	11.3	5.0
	30	2.1	2.38	9.0	7.5
	40	2.8	2.14	8.1	8.3
	50	3.4	1.86	7.0	9.1
2088-343-500	10	0.7	2.79	10.6	5.8
	30	2.1	2.26	8.6	8.3
	40	2.8	1.99	7.5	9.3
	50	3.4	1.69	6.4	10.1

SHURflo 2088 Series Diaphragm Pumps

Automatic-Demand Pumps 115 VAC



2088-394-144

These SHURflo 2088 Series pumps offer the same reliability as the 12 VDC version except in 115 VAC capacity. They are used in a variety of spot spraying, mini-bulk transfer and fertilizer applications that require flows of up to 3.2 GPM [12.1 L/min]. They are available in a variety of chemical-resistant materials.

- Self-priming up to 12 vertical feet [3.7m]
- Chemical-resistant materials
- Can run dry without damage
- Automatic demand
- Built-in check valve (may vary by model) prevents back flow of fluid into the solution tank

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
2088-394-144	3	11.4	40	2.8	1/2" MSPT* Male	0.7	Standard Pump with 6' power cord: Viton® valves, Santoprene® diaphragm, 45 PSI [3.1 bar] demand switch
2088-394-154	3.2	12.1	40	2.8	1/2" MSPT* Male	0.98	Standard Pump: Viton® valves, Santoprene® diaphragm, 45 PSI [3.1 bar] demand switch

* 1/2" - 14 National American Straight Pipe Thread

Model	PSI	BAR	GPM	L/min	Amps
2088-394-144	10	0.7	2.40	9.1	.55
	20	1.4	2.20	8.3	.60
	30	2.1	1.90	7.2	.65
	40	2.8	1.60	6.0	.70
2088-394-154	10	0.7	2.71	10.2	.65
	20	1.4	2.41	9.1	.77
	30	2.1	2.10	8.0	.89
	40	2.8	1.84	7.0	.98

SHURflo® 166 Series Diaphragm Pumps

Air-Driven Pumps



166-200-36

The SHURflo 166 air-operated demand pumps employ a dual diaphragm design, with a patented fast action switching mechanism allowing for consistent flow and pressure. They are built for the toughest pumping applications and are available in a variety of elastomers that allow them to be compatible with most caustic or acidic fluids. Ideal for chemical transfer, liquid fertilizer injection and agricultural spraying. 2 chamber dual diaphragm

- Positive displacement
- On-demand operation
- Chemical-resistant polypropylene body
- 30 to 60 PSI [2.1-4.1 bar]

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Description
166-200-36	0.6	2.3	30-60	2.1-4.1	Viton® valves and diaphragm
166-200-46	0.6	2.3	30-60	2.1-4.1	Buna valves and diaphragm
166-200-56	0.6	2.3	30-60	2.1-4.1	EPDM valves and diaphragm
166-200-57	0.6	2.3	30-60	2.1-4.1	Santoprene® valves and diaphragm

SHURflo Power Twin Pump

Demand Pumps 12VDC



4211-035

Take all the performance and features of the time-tested 2088 series, double it, and the result is the high-flow Power Twin. Delivers an open flow of 6.25 GPM [23.7 L/min] at a mere 8.7 amps. At 40 PSI [2.8 bar], it delivers 3.5 GPM [13.2 L/min] and draws only 17.2 amps. One of the most efficient high-flow self-priming pumps available today, the Power Twin is excellent for transferring, light-duty spraying, and use as a 1:1 proportioning pump.

- Up to 6.25 GPM [23.7 L/min]
- Thermally-protected motor with heat sink
- Self-priming up to 7 vertical feet (2.13 m)
- Quiet, balanced operation
- Long-life pressure switch
- Intake/Discharge manifold optional

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
4111-035	6.25	23.7	40	2.8	1/2" MPT	17.2	Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) demand switch, manifold with 5/8" barb ports
4211-035	6.25	23.7	40	2.8	1/2" MPT	17.2	Viton® valves, Santoprene® diaphragm, 45 PSI (3.1 bar) demand switch
94-389-00	Manifold Kit 5/8" barb (2) per pump						
94-389-01	Manifold Kit 3/4" barb (2) per pump						

Model	PSI	BAR	GPM	L/min	Amps
4111-035	0	0	6.25	23.5	8.7
	10	0.7	5.7	21.6	12.2
	20	1.4	5.0	19.0	14.5
	30	2.1	4.3	16.2	16.1
	40	2.8	3.5	13.2	17.2
4211-035	0	0	6.25	23.5	8.7
	10	0.7	5.7	21.6	12.2
	20	1.4	5.0	19.0	14.5
	30	2.1	4.3	16.2	16.1
	40	2.8	3.5	13.2	17.2

SHURflo® 9300 Series Submersible Pumps

24 VDC



902-100 Controller Features:

Boost your DC solar pump's performance by up to 30%. Controller optimizes your solar water pumping system by translating the current and voltage available from your photovoltaic panels, into a combination that is better matched to that needed by the pump. With the optional float switch installed, the controller will automatically stop pumping when the reservoir is full.

- * Operates on 24 VDC
- * Increases daily water output up to 30%
- * System starts pumping earlier in the morning
- * System stops pumping later in the evening
- * Protects pump from low or high volume conditions
- * Terminals for float switch

The SHURflo 9300 series pump offers a solution to your remote water pumping needs. It's rugged, durable and built to last. This pump delivers a steady 1.0 GPM [3.8 L/min] operating at 100 PSI [6.9 bar] maximum at 230 feet [70.1m]. It incorporates a unique, waterblocked cable connector that is impervious to water leakage and condensation problems preventing waterwicking. Great for applications in livestock watering, irrigation, ponds, islands, remote homes and cabins

- Fits wells 4 inches [10.2 cm] in diameter and larger
- Accepts a variety of jacketed cables from your power source
- Runs dry without damage
- Corrosion-proof housing with stainless steel fasteners
- Long-life, 24 VDC operation
- Quick disconnect for easy installation and service

902-200 Controller Features:

Includes all 902-100 features plus:

- * Switch selectable for 12 VDC or 24 VDC operation
- * Manual Pump On / Off switch for easy pump maintenance
- * Watertight enclosure and cable inlets
- * Includes high/low water level monitor mode with probes and cable so the pump will not run when the well water is too low

Order Information

Part Number	Max GPM	Max LPM	Max Draw	Description
9325-043-101	1.8	6.8	4.1	EPDM valves, Santoprene® diaphragm

Model	Description	Max. Array Input Voltage		Min. Startup Voltage		Shutdown Voltage	Max. Output Current
		12V	24V	12V	24V		
902-100 (LCB-GO)	9300 DC Pump Controller	45 V	N/A	25 V	N/A	28 V	5 Amps
902-200 (LCB-G)	9300 DC Pump Controller	45 V	N/A	25 V	12.5 V	28 V	7 Amps

Model	Vertical Lift				Solar Array	Current
	Feet	Meters	GPH	LPH	Watts	Amps
9325-043-101	20	6.1	117	443	58	1.5
	60	18.3	109	413	78	2.1
	100	30.5	103	390	99	2.6
	140	42.7	99	375	115	3.1
	180	54.9	93	352	135	3.6
	230	70.1	82	310	155	4.1

SHURflo 3000 Series Submersible Pumps

12 VDC



Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Draw
3000-350	2.5	9.5	10	0.7	7.4

Model	PSI	BAR	Dischg. Ft of Head	GPM	L/min	Amps
3000-350	0	0.0	0.0	3.8	14.4	6.5
	5	0.3	11.5	3.4	12.9	7.1
	10	0.7	23.0	2.5	9.5	7.4

The 3000 Series is suitable for a variety of uses from pumping water to changing oil in cars, trucks and farm equipment. Pumps incorporate thermal overload protection.

Not intended for use with flammable liquids or in flammable environments.

- Self-priming to 7.5 feet [2.3m] vertical
- Maximum head of 28 feet [8.5m] (12 PSI [.83 bar])
- Liquid temps from 40° F to 185° F [4.4°C to 85°C]
- Thermal overload protection
- Stainless steel shaft
- BUNA-N impeller and lip seal
- Built-in reverse switch and 8 foot [2.4m] cable with battery clips

SHURflo® SLV Series Diaphragm Pumps

12 and 24 VDC Demand Pumps



SLV10-AA48
(Front and Back Shown)

The SHURflo SLV is ideal for low volume, intermittent-duty applications requiring a compact pump with low power consumption. Unique design has no metals in the fluid path for maximum chemical resistance. Pump features include automatic demand operation and elastomers that handle a wide variety of chemicals. Perfect for low volume spraying and transfer. Cost effective yet with high performance and reliability; the SLV offers tremendous value.

- Automatic demand; 25 PSI [1.72 bar] on/40 PSI [2.8 bar]
- Self-priming up to 2.5 vertical feet [.76 m]
- Long-life pressure switch
- Thermally-protected ball bearing motor with splash-proof housing
- Internal fan radiates heat; external heat sink not required
- Integral on/off switch optional

Order Information - Automatic Demand Pumps 12 VDC

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
SLV10-AA40	1	3.8	30	2.1	3/8" Barb	2.5	Viton® valves, Santoprene® diaphragm, 40 PSI [2.8 bar] demand switch, Integral on/off switch included
SLV10-AA41	1	3.8	30	2.1	3/8" Barb	2.5	Viton® valves, Santoprene® diaphragm, 40 PSI [2.8 bar] demand switch
SLV10-AA48*	1	3.8	30	2.1	3/8" Barb	2.5	Viton® valves, Santoprene® diaphragm, 40 PSI [2.8 bar] demand switch, Manual switch and 2 pin connector 12VDC

* Packaged in quantities of 6, for single pack, add suffix "AB" (i.e.: SLV10-AA48-AB).

Automatic Demand Pumps 12 VDC

Model	PSI	BAR	GPM	L/min	Amps
SLV10-AA40	3	0.2	0.90	3.4	1.8
	10	0.7	0.73	2.8	2.1
	20	1.4	0.62	2.3	2.3
	30	2.1	0.49	1.9	2.5
SLV10-AA41	3	0.2	0.90	3.4	1.8
	10	0.7	0.73	2.8	2.1
	20	1.4	0.62	2.3	2.3
	30	2.1	0.49	1.9	2.5
SLV10-AA48	3	0.2	0.90	3.4	1.8
	10	0.7	0.73	2.8	2.1
	20	1.4	0.62	2.3	2.3
	30	2.1	0.49	1.9	2.5

Order Information - Automatic Demand Pump 24 VDC

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
SLV10-AB41	1	3.8	30	2.1	3/8" Barb	1.23	Viton® valves, Santoprene® diaphragm, 40 PSI [2.8 bar] demand switch

Automatic Demand Pump 24 VDC

Model	PSI	BAR	GPM	L/min	Amps
SLV10-AB41	3	0.2	0.90	3.4	0.89
	10	0.7	0.73	2.8	1.00
	20	1.4	0.62	2.3	1.15
	30	2.1	0.49	1.9	1.23

Order Information - No Control Transfer Pump 12 VDC

Part #	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Max Draw	Description
SLV10-HA01	1	3.8	30	2.1	3/8" Barb	2.5	Viton® valves, Geolast® diaphragm, No demand switch

No Control Transfer Pump 12 VDC

Model	PSI	BAR	GPM	L/min	Amps
SLV10-HA01	3	0.2	0.90	3.4	1.8
	10	0.7	0.73	2.8	2.1
	20	1.4	0.62	2.3	2.3
	30	2.1	0.49	1.9	2.5



Drill Pump

Attaches to any standard 1/4" [6.35 mm] drill motor. Ideal for pumping water from appliances, aquariums, water beds, sinks, toilets or drums. Includes a 1/4" [6.35 mm] oil probe that easily allows the transfer of oil from cars, trucks, lawn and garden equipment. Not intended for use with flammable liquids or in flammable environments.

- Self-priming to 8 feet [2.4m] vertical
- Pumps liquids 40° F to 120° F [4.4° C to 48.8° C]
- BUNA impeller and seals
- 1/4" [6.35 mm] shaft fits standard drills

Order Information

Part Number	Max GPH	Max LPH	Port Size	Shaft Size
3010-000	200	757	3/4" (M) GHT	1/4"

Oil Change System



Makes a messy job clean and easy. Simply install the oil probe in the engine oil dipstick tube, attach the battery clips, and flip the switch. Oil is safely removed and stored in the easy to carry container. Oil should be heated to 140°F for maximum pump efficiency.

- Complete with necessary tubing and oil storage container
- 8 foot cable with battery clips
- Thermal overload protection

Order Information

Model	Description
8050-305-426	Oil Change System

Accumulator Tank, Heat Sink



Accumulator Tank

Heat Sink

Order Information

Model	Description
181-101	Accumulator Tank: 24 oz. total capacity (liquid and air), pre-pressurized to 20 PSI [1.4 bar], (0 to 100 PSI [6.9 bar] range of adjustment), Santoprene® bladder, mounting bracket. 1/2" (F) NPT Female ports, NSF approved.
34-007	5" [12.7 cm] Heat Sink to assist cooling in Continuous-duty applications
34-006	3" [7.6 cm] Heat Sink to assist cooling in Continuous-duty applications

Bowl-Style Strainers



Model	Description
255-223	50 Mesh screen, 1/2" Barb Inlet x 1/2 NPSM Female Outlet
255-313	50 Mesh screen, 1/2" NPSM Male Inlet x 1/2 NPSM Female Outlet, EPDM O-ring
255-323	50 Mesh screen, 1/2" Barb Inlet x 1/2 NPSM Female Outlet, EPDM O-ring
255-646	50 Mesh screen, 3/8" x 3/8" MNPT Poly/Nylon, Viton® O-ring
255-246	50 Mesh screen, 3/8" x 3/8" MNPT Poly/Nylon, Viton® O-ring
255-568	50 Mesh screen, 3/8" x 3/8" MNPT Poly/Nylon, EPDM O-ring
255-613	50 Mesh screen, 1/2" NPSM Male Inlet x 1/2 NPSM Female Outlet, Viton® O-ring
255-623	50 Mesh screen, 1/2" Barb Inlet x 1/2 NPSM Female Outlet, Viton® O-ring
255-413	50 Mesh screen, 1/2" NPSM Male Inlet x 1/2 NPSM Female Outlet, Buna O-ring



Barb Tee

Part Number	Description
8-126-00	1/2" [12mm] Barb Tee - Polypro



Barb Tee X Pipe

Part Number	Description
T3812T	3/8" [10mm] MNPT-Male x 1/2" Barb Tee - Nylon
3T3812T	3/8" [10mm] MNPT-Male x 1/2" Barb Tee - Poly



Swivel Hex Wingnut Straight

Part Number	Description
234-2916	1/2" [12mm] NPT-Female x 3/8" [10 mm] Barb - Polypro
234-2926	1/2" [12mm] NPT-Female x 1/2" [12 mm] Barb - Polypro
234-2936	1/2" [12mm] NPT-Female x 5/8" [16 mm] Barb - Polypro
234-2946	1/2" [12mm] NPT-Female x 3/4" [19 mm] Barb - Polypro



Swivel Hexnut Elbow

Part Number	Description
234-3926	1/2" [12mm] NPT-Female x 1/2" [12 mm] Barb Swivel Hexnut Elbow - Polypro
244-3366	1/2" [12mm] NPT-Female x 1/2" [12 mm] NPT Male Swivel Hexnut Elbow Adaptor - Nylon
234-3916	1/2" [12mm] NPT-Female x 3/8" [10 mm] Barb Swivel Hexnut Elbow - Polypro
234-3946	1/2" [12mm] NPT-Female x 3/4" [19 mm] Barb Swivel - Polypro
234-3936	1/2" [12mm] NPT-Female x 5/8" [16 mm] Barb Swivel - Polypro

*Fitting available only in nylon - CHECK COMPATIBILITY.



Barbed X Pipe Straight

Part Number	Description
8-005-01	3/8" [10mm] NPT-Male x 3/8" [10 mm] Barb - Polypro
8-007-01	3/8" [10mm] NPT-Male x 1/2" [12 mm] Barb - Polypro
244-5126	1/2" [12mm] NPT-Male x 1/2" [12 mm] Barb - Nylon



Barbed X Pipe Elbow

Part Number	Description
8-006-01	3/8" [10mm] NPT-Male x 3/8" [10 mm] Barb - Poly
244-6128	3/8" [10mm] NPT-Male x 1/2" [12 mm] Barb - Poly



8-145-00



8-150-01



8-205-00

Adapters

Part Number	Description
8-145-00	3/8" [10mm] NPT-Male x 1/2" [12 mm] NPT-Male - Polypro
8-150-01*	1/2" [12mm] NPT-Female x 3/4" [19 mm] GHT (M) - Nylon
8-205-00	1/2" [12mm] NPT-Female x 1/2" [12 mm] NPT-Male - Aceryl

*Fitting available only in nylon - CHECK COMPATIBILITY.

SHURflo® AG Runner



The SHURflo AG Runner Transfer Pump System is designed to safely and accurately transfer bulk chemicals to the point of use.

Features include:

- Industry leading pump
- Portable
- Can be used with a variety of bulk containers
- Built for rugged service with a heavy-duty welded frame
- Simple and accurate flow indicator

Order Information

Part Number	Flow Meter Type	Description
SF-1100-PTS	Pump-mounted (FM-1100)	Chemical Transfer Pump with 12 VDC motor, 20 ft. (6 m) cable, alligator clips and in-line fuse (Part # SF-1100 - EPDM valves or SF-1105 - Viton valves), electronic flow meter, 1-in. NPT x 12 ft. (3.7 m) EPDM discharge hose with ball valve/spout, and 1-in. NPT x 12 ft. (3.7 m) EPDM inlet hose with 1-in. elbow/ball valve/fitting assembly with locking cam arms
SF-1100-PTSi	Inline (FM-1100i)	
SF-1100-PTSi-00	No Flow Meter	
SF-1105-PTS	Pump-mounted (FM-1100)	
SF-1105-PTSi	Inline (FM-1100i)	

See Mini-Bulk Pump (pg. 98) for performance information.



SHURflo Mini-Bulk Chemical Transfer System



SHURflo Mini-Bulk Chemical Transfer Pumps and Systems are designed specifically for chemical company tanks where the pump is integral to the tank. The SF-1100-REC system is mounted to any tank with a 9-inch, threaded opening. This system allows the pump to recirculate the suspended chemical components prior to transferring to the point of use.

Order Information

Part Number	Description
SF-1100-REC-DT	Chemical Transfer Pump with 12 VDC motor, 20 ft. (6 m) cable, alligator clips & in-line fuse (Part # SF-1100 - EPDM valves or SF-1105 - Viton valves), in-line electronic flow meter (Part # FM-1100i), 1-in. NPT x 12 ft. (3.7 m) EPDM discharge hose with ball valve/spout, 3-way valve, tubing and fittings to allow tank recirculation, and 28" (71 cm) dip tube. (SF-1100-REC-DT only)
SF-1105-REC*	

See Mini-Bulk Pump (pg. 98) for performance information.

* Does not come with 28" dip tube. To order dip tube separately use part number 2407-0002



SHURflo® Mini-Bulk Pumps



The SF-1100 Series Bulk Chemical Pumps are the industry leader. They are designed for efficiency and power to handle highly viscous fluids. Servicing the SF-1100 series pump is a rare event, but if needed, it can be serviced quickly and easily with only a few hand tools.

- Specialized EPDM elastics or Viton option
- 12 volt DC or 110 volt AC motor option
- 20 foot (6 m) cord with alligator clips and in-line fuse (DC only)
- Weather protected on/off switch
- Internal bypass to protect the pump at shut-off
- 2" MNPT inlet, 1" FNPT outlet
- Capable of priming up to 12 feet (3.7 m)

Order Information

Part Number	Valves	Motor
SF-1100	EPDM	12 VDC
SF-1100-110V	EPDM	110 VAC
SF-1105	Viton®	12 VDC

Model	PSI	BAR	GPM	L/min	Amps
SF-1100 and SF-1105	0	0.0	10.7	40	9.3
	5	0.3	10.1	38	10.3
	10	0.7	8.7	33	12.3
	15	1.0	7.6	29	13.9

SHURflo Mini-Bulk Flow Meters



The FM-1100 Series Electronic Flow Meter is designed for accurate and easy measuring of transferred chemicals. The FM-1100 Series Flow Meter is an integral component for a complete bulk chemical transfer system.

- Max. flow of 20 gpm (76 lpm) (.5% accuracy after calibration)
- Max pressure of 120 psi (8.3 bar)
- Accurate nutating disk design
- Large LCD display makes meter reading easy from a distance
- Simple calibration steps and control button layout
- Long-life lithium battery
- Easy-to-service electronics and batteries
- Available in pump-mounted and hose-end configurations

Order Information

Part Number	Max GPM	Max LPM	Max PSI	Max BAR	Description
FM-1100	20	76	120	8.3	Pump-mounted meter kit- 1" MNPT inlet & outlet
FM-1100i	20	76	120	8.3	Inline meter kit -1" FNPT inlet & outlet

SHURflo® Mini-Bulk Kits, Parts, & Accessories



Part# 94-718-00



Part# 94-719-00



Part# 94-720-00
& 94-720-05



Part# 94-721-00

Mini-Bulk Pump Kits for SF-1100 Series

Part Number	Description
94-718-00	Motor assembly kit used in any SF-1100 series pumps. Kit includes a 12 VDC motor with integrated pump lower housing, built-in on-off switch, 20 foot (6 m) cable, alligator clips and in-line fuse (Support bracket part # 84-1038-08)
94-719-00	Santoprene® diaphragm/lower housing/drive assembly - ready for installation
94-720-00	EPDM valve housing kits include a complete fully-assembled valve housing with o-ring seal* - ready for installation
94-720-05	Viton® valve housing kits include a complete fully-assembled valve housing with o-ring seal* - ready for installation
94-721-00	Polypropylene upper housing - includes o-ring seal* and pump head screws

* Manufacturer recommends replacing the O-ring seal whenever the pump has been dismantled.



Part# 94-732-00



Part# 94-733-00



Part# 94-734-00



Part# 94-735-00



Part# 94-736-00

Mini-Bulk Flow Meter Kits for FM-1100 Series

Part Number	Description
94-732-00	Flow meter electronics kit includes the front cover assembly and the electronic display with o-ring and batteries. Kit fits both pump-mounted and in-line meters [O-ring part # 5-040-154]
94-733-00	Flow meter housing seal cover kit includes the seal cover, o-ring and screws. Kit fits both pump-mounted and in-line meters. [O-ring part # 5-040-154]
94-734-00	Nutating chamber assembly, including o-ring seal. Kit fits both pump-mounted and in-line meters
94-735-00	90° meter housing with o-ring seal for pump-mounted flow meter. [O-ring part # 5-043-240]
94-736-00	Meter housing with o-ring seal for in-line flow meter. [O-ring part # 5-043-240]



Part# 3320-0064



Part# 8-727-00



Part# 94-712-00



Part# 94-716-00



Part# 94-717-00



Part# 94-723-00



Part# 94-724-00



Part# 94-725-00



Part# 94-737-00



Part# 94-738-00

Other Mini-Bulk Parts & Accessories

Part Number	Description
3320-0064	Anti-flow back valve for EPA compliance
8-727-00	2 inch FNPT by 1 inch FNPT polypropylene reducer coupling
94-712-00	2 inch male NPT by 2 inch female NPT street elbow fitting
94-716-00	1 inch NPT ball valve with spout
94-717-00	1 inch NPT x 12 foot EPDM discharge hose kit
94-723-00	Set of red and black alligator clips, including fuse holder
94-724-00	Replacement recirculation lid [Gasket part # 7-155-00]
94-725-00	Replacement recirculation cap
94-737-00	Recirculation system return hose kit - includes return hose and two hose clamps
94-738-00	Elbow, valve and coupling assembly - includes a 1 inch street elbow, 1 inch ball valve, and 1 inch bayonet tank coupling

Big Twin

Models 5206C and 5206C-H



- Port sizes: 3/4" inlet, 3/4" outlet
- Max. fluid temperature: 140°F/60°C
- Pump shaft rotation: bi-rotational
- Cups: Leather standard [fabric-reinforced (F) and Buna-N (R) available]
- Recommended to be used with Pulsation Dampener 3375-0017-2
- Weight: 18 lbs./8.2 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
5206C	8	30.3	400	27.6	800	1" solid shaft w/base
5206C-H	8	30.3	400	27.6	800	1-3/8" hollow shaft w/base
3430-0037	Leather cup kit					

Fabric Cups - Add Suffix "F" - (ie.: 5206C-F).
Buna-N Cups - Add Suffix "R" - (ie.: 5206C-R).

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	400 RPM	500 RPM	540 RPM	600 RPM	700 RPM	800 RPM						
25 PSI	3.9	.26	4.9	.29	5.4	.31	6.0	.34	7.0	.40	8.0	.46
1.7 BAR	14.8	.26	18.5	.29	20.4	.31	22.7	.34	26.5	.40	30.3	.46
100 PSI	3.9	.40	5.0	.46	5.4	.50	6.0	.56	7.0	.65	7.9	.74
6.9 BAR	14.8	.40	18.9	.46	20.4	.50	22.7	.56	26.5	.65	29.9	.74
200 PSI	4.0	.66	5.0	.75	5.4	.81	6.0	.90	6.9	1.1	7.8	1.2
13.8 BAR	15.1	.66	18.9	.75	20.4	.81	22.7	.90	26.1	1.1	29.5	1.2
300 PSI	3.9	.89	5.0	1.1	5.3	1.2	5.9	1.3	6.9	1.5	7.7	1.7
20.9 BAR	14.8	.89	18.9	1.1	20.1	1.2	22.3	1.3	26.1	1.5	29.1	1.7
400 PSI	3.9	1.1	4.9	1.4	5.3	1.5	5.9	1.6	6.9	1.9	7.7	2.2
27.6 BAR	14.8	1.1	18.5	1.4	20.1	1.5	22.3	1.6	26.1	1.9	29.1	2.2

Big Twin

Models 5210C and 5210C-H



- Port sizes: 3/4" inlet, 3/4" outlet
- Max. fluid temperature: 140°F/60°C
- Pump shaft rotation: bi-rotational
- Cups: Leather standard [fabric-reinforced (F) and Buna-N (R) available]
- Recommended to be used with Pulsation Dampener 3375-0015-2
- Weight: 18 lbs./8.2 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
5210C	10	37.5	400	27.6	600	1" solid shaft w/base
5210C-H	10	37.5	400	27.6	600	1-3/8" hollow shaft w/base
3430-0037	Leather cup kit					

Fabric Cups - Add Suffix "F" - (ie.: 5210C-F).
Buna-N Cups - Add Suffix "R" - (ie.: 5210C-R).

Pressure in PSI and BAR	GPM	HP	GPM	HP	GPM	HP	GPM	HP
	400 RPM	500 RPM	540 RPM	600 RPM				
25 PSI	7.3	.39	8.9	.57	9.4	.66	10.0	.73
1.7 BAR	27.6	.39	33.7	.57	35.6	.66	37.9	.73
100 PSI	7.3	.69	8.9	.87	9.4	.94	9.9	1.10
6.9 BAR	27.6	.69	33.7	.87	35.6	.94	37.5	1.10
200 PSI	7.2	1.2	8.8	1.5	9.3	1.6	9.9	1.7
13.8 BAR	27.2	1.2	33.3	1.5	35.2	1.6	37.5	1.7
300 PSI	7.2	1.7	8.8	2.0	9.3	2.2	9.8	2.3
20.7 BAR	27.2	1.7	33.3	2.0	35.2	2.2	37.1	2.3
400 PSI	7.2	2.1	8.7	2.6	9.2	2.7	9.8	3.0
27.6 BAR	27.2	2.1	32.9	2.6	34.8	2.7	37.1	3.0

Small Twin

Series 5315, 5320, 5325 and 5330



- Port sizes: 1/2" inlet, 1/2" outlet
- Max. fluid temperature: 140°F/60°C
- Pump shaft rotation: bi-rotational
- Cups: Leather (-X) standard for 5300 Series [Buna-N (-RX), Teflon (-CX) available]
- Models require a pulsation dampener (such as a 3375-0012 pulse hose) on the discharge side
- Injector head available (sold separately part number 3396-0014)
- Weight: 10 lbs./4.5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
5315C-X	1.5	5.7	500	34.5	1800	5/8" OD solid shaft
5320C-X	2.2	8.3	500	34.5	1800	5/8" OD solid shaft
5325C-X	2.5	9.5	500	34.5	1800	5/8" OD solid shaft
5330C-X	3	11.4	500	34.5	1800	5/8" OD solid shaft
5315C-HX	1.5	5.7	500	34.5	1800	5/8" ID hollow shaft
5320C-HX	2.2	8.3	500	34.5	1800	5/8" ID hollow shaft
5325C-HX	2.5	9.5	500	34.5	1800	5/8" ID hollow shaft
5330C-HX	3	11.4	500	34.5	1800	5/8" ID hollow shaft

Buna-N - add suffix "R" - (i.e. :5320C-RX)

Teflon - add suffix "C" - (i.e. :5320C-CX)

Model	5315		5320		5325		5330	
Pressure in PSI and BAR	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP
	@1725 RPM		@1725 RPM		@1725 RPM		@1725 RPM	
50 PSI	1.56	.12	2.22	.21	2.56	.25	3.02	.37
3.4 BAR	5.9	.12	8.4	.21	9.7	.25	11.4	.37
100 PSI	1.52	.15	2.18	.28	2.54	.37	3.01	.49
6.9 BAR	5.8	.15	8.3	.28	9.6	.37	11.4	.49
200 PSI	1.50	.28	2.16	.43	2.52	.52	3.00	.74
13.8 BAR	5.7	.28	8.2	.43	9.3	.52	11.4	.74
300 PSI	1.47	.35	2.12	.57	2.50	.68	2.98	.92
20.7 BAR	5.6	.35	8.0	.57	9.5	.68	11.3	.92
400 PSI	1.45	.43	2.11	.71	2.10	.82	2.96	1.11
27.6 BAR	5.5	.43	8.0	.71	7.9	.82	11.2	1.11
500 PSI	1.44	.56	2.10	.83	2.44	.96	2.94	1.23
34.5 BAR	5.5	.56	7.9	.83	9.9	.96	11.1	1.23

Small Twin

Models 5324C and 5324C-H



- Port sizes: 1/2" inlet, 1/2" outlet
- Max. fluid temperature: 140°F/60°C
- Pump shaft rotation: bi-rotational
- Cups: Buna-N standard
- Model 5324 requires a pulsation dampener (such as a 3375-0012 pulse hose) on the discharge side
- Injector head available 3396-0006
- Weight: 11 lbs./5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
5324C	2.9	11.0	800	55.2	1800	5/8" OD solid shaft
5324C-H	2.9	11.0	800	55.2	1800	5/8" ID hollow shaft

Pressure in PSI and BAR	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP	GPM LPM	HP
	@600 RPM		@900 RPM		@1200 RPM		@1450 RPM		@1725 RPM	
100 PSI	.96	.12	1.51	.19	2.00	.28	2.42	.34	2.90	.40
6.9 BAR	3.6	.12	5.7	.19	7.6	.28	9.2	.34	11.0	.40
200 PSI	.94	.19	1.49	.30	1.98	.41	2.40	.50	2.89	.59
13.8 BAR	3.6	.19	5.6	.30	7.5	.41	9.1	.50	10.9	.59
300 PSI	.94	.26	1.48	.41	1.97	.55	2.38	.67	2.87	.80
20.7 BAR	3.6	.26	5.6	.41	7.5	.55	9.0	.67	10.9	.80
400 PSI	.95	.33	1.47	.50	1.96	.67	2.37	.83	2.85	1.00
27.6 BAR	3.6	.33	5.6	.50	7.4	.67	9.0	.83	10.8	1.00
500 PSI	.94	.39	1.47	.60	1.96	.81	2.36	.97	2.83	1.19
34.5 BAR	3.6	.39	5.6	.60	7.4	.81	8.9	.97	10.7	1.19
600 PSI	.93	.45	1.46	.69	1.95	.93	2.35	1.13	2.81	1.38
41.4 BAR	3.5	.45	5.5	.69	7.4	.93	8.9	1.13	10.6	1.38
700 PSI	.93	.52	1.46	.78	1.94	1.06	2.33	1.27	2.80	1.54
48.3 BAR	3.5	.52	5.5	.78	7.3	1.06	8.8	1.27	10.6	1.54
800 PSI	.93	.58	1.45	.87	1.93	1.16	2.32	1.42	2.79	1.69
55.2 BAR	3.5	.58	5.5	.87	7.3	1.16	8.8	1.42	10.6	1.69

Small Twin

Models 5321C, 5322C, 5321C-H and 5322C-H



- Port sizes: 1/2" inlet, 1/2" outlet
- Max. fluid temperature: 180°F/82°C
- Pump shaft rotation: bi-rotational
- Injector head available 3396-0006
- Models 5321 and 5322 require a pulsation dampener (such as a 3375-0012 pulse hose) on the discharge side
- Weight: 11 lbs./5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output	Plunger Material
5321C	2.2	8.3	1000	68.9	1800	5/8" OD solid shaft	Stainless Steel
5322C	2.2	8.3	1000	68.9	1800	5/8" OD solid shaft	Ceramic
5321C-H	2.2	8.3	1000	68.9	1800	5/8" ID hollow shaft	Stainless Steel
5322C-H	2.2	8.3	1000	68.9	1800	5/8" ID hollow shaft	Ceramic

Pressure in PSI and BAR	GPM LPM	HP HP	GPM LPM	HP HP	GPM LPM	HP HP	GPM LPM	HP HP
	@900 RPM		@1200 RPM		@1450 RPM		@1725 RPM	
100 PSI	1.1	0.2	1.5	.3	1.8	.4	2.2	.4
6.9 BAR	4.2	0.2	5.7	.3	6.8	.4	8.3	.4
300 PSI	1.1	.4	1.5	.5	1.8	.6	2.1	.7
20.7 BAR	4.2	.4	5.7	.5	6.8	.6	7.9	.7
500 PSI	1.1	.5	1.5	.6	1.8	.7	2.1	.8
34.5 BAR	4.2	.5	5.7	.6	6.8	.7	7.9	.8
700 PSI	1.1	.6	1.5	.8	1.8	.9	2.1	1.1
48.3 BAR	4.2	.6	5.7	.8	6.8	.9	7.9	1.1
1000 PSI	1.1	.8	1.4	1.0	1.8	1.2	2.1	1.4
69.0 BAR	4.2	.8	5.3	1.0	6.8	1.2	7.9	1.4

Small Twin

Model 53702



- Port sizes: 1/2" inlet, 1/2" outlet
- Max. fluid temperature: 180°F/82°C
- Pump shaft rotation: bi-rotational
- Plungers: polished ceramic
- Model 53702 requires a pulsation dampener (such as a 3375-0012 pulse hose) on the discharge side
- Inlet requirements: pressure feed 20-100 psi (1.4-6.9 bar)
- Weight: 11 lbs./5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
53702	2.2	8.3	1000	68.9	3450	5/8" ID hollow shaft

Pressure in PSI and BAR	GPM LPM	HP HP
	@3450 RPM	
100 PSI	2.3	.4
6.9 BAR	8.7	.4
300 PSI	2.2	.7
20.7 BAR	8.3	.7
500 PSI	2.1	.9
34.5 BAR	8.0	.9
700 PSI	2.1	1.2
48.3 BAR	8.0	1.2
1000 PSI	2.0	1.5
69 BAR	7.6	1.5

Small Twin

Model 53703



- Max. fluid temperature: 180°F/82°C
- Port sizes: 1/2" inlet, 1/2" outlet
- Pump shaft rotation: bi-rotational
- Plungers: polished ceramic
- Model 53703 requires a pulsation dampener (such as a 3375-0012 pulse hose) on the discharge side
- Inlet requirements: pressure feed 20-100 psi (1.3 - 6.9 bar)
- Weight: 11 lbs./5 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Shaft Output
53703	2.3	8.7	1000	68.9	3100	5/8" ID hollow shaft

Requires a Special Order Gas Engine With 5/8" Shaft

Pressure in PSI and BAR	GPM	HP
	LPM	HP
@3100 RPM		
100 PSI	2.3	0.4
6.9 BAR	8.7	0.4
300 PSI	2.2	.7
20.7 BAR	8.3	.7
500 PSI	2.1	.9
34.5 BAR	7.9	.9
700 PSI	2.1	1.2
48.3 BAR	7.9	1.2
1000 PSI	2.0	1.5
69.0 BAR	7.6	1.5

Hydraulically-Driven Pressure Washers

Offering 3-4 gpm (11-15 lpm) Cleaning Power



- Anodized, die-cast aluminum crankcase
- Heavy-duty, corrosion-resistant brass manifold
- One-piece, forged-bronze connecting rods
- Stainless steel valves
- Hardened, stainless steel piston guides
- Solid ceramic plungers
- High pressure and low pressure packings of high-quality buna textile
- Heavy-duty, ball bearing supported crankshaft
- Sight glass and oil-level dipstick
- Hydraulic ports: 1/2" NPT inlet, 3/4" NPT outlet

The hydraulically-driven pressure washers are ideally suited for remote and explosion-proof environments where electricity cannot be used. These models are equipped with a hydraulic motor-driven, triplex plunger pump; and include an unloader, gauge, and quick disconnect. Some models include a chemical injector, 50' (15 m) pressure wash hose, trigger gun and insulated wand with adjustable Hi-Lo and Variable-Angle cleaning nozzle. Certain models are also equipped with a chemical injector.

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Hydraulic Motor Requirements				Description	Weight	
					GPM	LPM	PSI	BAR		LBS	KG
1802C*	3	11.4	1000	68.9	5	18.9	1300	89.6	Forged Brass Head Triplex Pumps with hydraulic motor, adjustable unloader, gauge, 1/2" NPT input, 3/8" quick disconnect output	38	17.2
1803C	3	11.4	1000	68.9	5	18.9	1300	89.6		28	12.7
1804C*	3	11.4	1500	103.4	8	30.3	1900	131		41	18.6
1805C	3	11.4	1500	103.4	8	30.3	1900	131		26	11.8
1806C*	3	11.4	2000	137.9	11	41.6	1300	89.6	Forged Brass Head Triplex Pumps with hydraulic motor, chemical injector, adjustable unloader, gauge, 3/4" GH input, 3/8" quick disconnect output	41	18.6
1807C	3	11.4	2000	137.9	11	41.6	1300	89.6		26	11.8
1824C*	4	15.1	1500	103.4	8.5	32.2	2000	137.9		49	22.2
1825C	4	15.1	1500	103.4	8.5	32.2	2000	137.9		33	14.9
1826C*	4	15.1	2000	137.9	8.5	32.2	2000	137.9		49	22.2
1827C	4	15.1	2000	137.9	8.5	32.2	2000	137.9		33	14.9

* Includes 50 ft (15 m) hose and gun assembly

VERSA-TWIN 2130 Series Plunger Pumps



- Molded from Noryl GTX for chemical resistance against fertilizers, insecticides, chlorides, acids, and bleach
- Robust motor, ceramic plunger, and crank drive provide market-leading long life without servicing
- 4-point 1" NPT flynut-ready connections allow for greater flexibility in plumbing, easy installation and servicing, draining and maintenance
- 1" ports allow for single-sided inlet plumbing
- Available in standard models up to 4.0 GPM (15.1 L/min) & 300 PSI (20.7 BAR)

Order Information

Model Number	Max GPM	Max L/min	Max PSI	Max BAR	Max RPM	Motor Type	Ports
2130P-D183	2.5	9.5	150	10.3	2200	¼ HP 12V DC Motor, 20 amps	1" MNPT
2130P-D355	2.8	10.6	300	20.7	2000	½ HP 12V DC Motor, 35 amps	
2130P-D359	3.9	14.8	200	13.8	2000	½ HP 12V DC Motor, 35 amps	
2130P-D395	2.9	11.0	300	20.7	2000	½ HP 12V DC Motor, 56C, 39 amps	
2130P-D399	4.0	15.1	200	13.8	2000	½ HP 12V DC Motor, 56C, 39 amps	
2130P-A055	2.4	9.1	300	20.7	1750	½ HP 115-208/230V AC Motor, 1 PH 50/60 Hz	
2130P-A079	3.9	14.8	300	20.7	1750	¾ HP 115-208/230V AC Motor, 1 PH 50/60 Hz	
2130PX	Replacement pump head						

Performance

Model Number	0 PSI / 0 BAR		50 PSI / 3.5 BAR		100 PSI / 6.9 BAR		150 PSI / 10.3 BAR		200 PSI / 13.8 BAR		250 PSI / 17.2 BAR		300 PSI / 20.7 BAR	
	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS
	L / min		L / min		L / min		L / min		L / min		L / min		L / min	
2130P-D183 ¹	2.5	5.2	2.2	9.8	2.0	14.6 *	1.8	19.3 *	-	-	-	-	-	-
	9.5		8.3		7.6		6.8		-	-	-	-	-	-
2130P-D355 ¹	2.8	9.1	2.5	13.4	2.4	18.9	2.3	23.5	2.2	27.5 *	2.1	30.9 *	2.0	34.8 *
	10.6		9.5		9.1		8.7		8.3		7.9		7.6	
2130P-D359 ¹	3.9	11.6	3.2	17.2	3.1	21.5 *	3.0	26.2 *	2.8	31.8 *	-	-	-	-
	14.8		12.1		11.7		11.4		10.6		-		-	
2130P-D395 ¹	2.9	8.3	2.5	13.0	2.4	19.0	2.3	23.5	2.2	27.2	2.1	30.7	2.0	33.9
	11.0		9.5		9.1		8.7		8.3		7.9		7.6	
2130P-D399 ¹	4.0	11.0	3.5	17.2	3.3	24.0	3.1	29.3	3.0	34.2	-	-	-	-
	15.1		13.2		12.5		11.7		11.4		-		-	
2130P-A055 ²	2.4	6.5	2.2	6.6	2.1	6.7	2.1	6.8	2.0	7.0	1.9	7.2	1.9	7.3
	9.1		8.3		7.9		7.9		7.6		7.2		7.2	
2130P-A079 ²	3.9	8.9	3.4	9.0	3.3	9.1	3.2	9.5	3.1	9.8	3.0	10.1	2.9	10.6
	14.8		12.9		12.5		12.1		11.7		11.4		11.0	


* indicates intermittent duty only ¹ Tested at 13.5 VDC ² Tested at 110 VAC

VERSA-TWIN 2130 Series Plunger Pumps with Pressure Switch

THE INDUSTRY-FIRST INTEGRATED AUTOMATIC-DEMAND PRESSURE SWITCH



2132P-D395
2132P-D399



2132P-D355
2132P-D359



2132P-D183

- Integrated pressure switch designed for the pump to work as a demand pump
- Extends the life of the pump when the duty cycle is less than 100%, for example, a 50% duty cycle extends the life of the system two times and a 25% duty cycle extends the life four times
- Reduces end-user installation charges by allowing a system to be set up for overnight charging versus continuous charging through a custom, high-amp vehicle alternator and heavy-gauge wiring system

Order Information

Model Number	Max GPM	Max L/min	Max PSI	Max BAR	Max RPM	Motor Type	Pressure Switch	Ports
2132P-D183	2.5	9.5	150	10.3	2200	1/4 HP 12V DC Motor, 20 amps	150-250 PSI (10.3-17.2 BAR)	1" MNPT
2132P-D355	2.8	10.6	250	17.2	2000	1/2 HP 12V DC Motor, 35 amps	150-250 PSI (10.3-17.2 BAR)	
2132P-D359	3.9	14.8	200	13.8	2000	1/2 HP 12V DC Motor, 35 amps	150-250 PSI (10.3-17.2 BAR)	
2132P-D395	2.9	11.0	250	17.2	2000	1/2 HP 12V DC Motor, 39 amps	150-250 PSI (10.3-17.2 BAR)	
2132P-D399	4.0	15.1	200	13.8	2000	1/2 HP 12V DC Motor, 39 amps	150-250 PSI (10.3-17.2 BAR)	
2133P-D355	2.8	10.6	300	20.7	2000	1/2 HP 12V DC Motor, 35 amps	250-350 PSI (17.2-24.1 BAR)	
2133P-D395	2.9	11.0	300	20.7	2000	1/2 HP 12V DC Motor, 56C, 39 amps	250-350 PSI (17.2-24.1 BAR)	
2132PX	Replacement pump head & switch						150-250 PSI (10.3-17.2 BAR)	
2133PX	Replacement pump head & switch						250-350 PSI (17.2-24.1 BAR)	

Performance

Model Number	0 PSI / 0 BAR		50 PSI / 3.5 BAR		100 PSI / 6.9 BAR		150 PSI / 10.3 BAR		200 PSI / 13.8 BAR		250 PSI / 17.2 BAR		300 PSI / 20.7 BAR	
	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS
	L / min		L / min		L / min		L / min		L / min		L / min		L / min	
2132P-D183 ¹	2.5	5.2	2.2	9.8	2.0	14.6 *	1.8	19.3 *	-	-	-	-	-	-
	9.5		8.3		7.6		6.8		-	-	-	-	-	-
2132P-D355 ¹	2.8	9.1	2.5	13.4	2.4	18.9	2.3	23.5	2.2	27.5 *	2.1	30.9 *	2.0	34.8 *
2133P-D355 ¹	10.6		9.5		9.1		8.7		8.3		7.9		7.6	
2132P-D359 ¹	3.9	11.6	3.2	17.2	3.1	21.5	3.0	26.2 *	2.8	31.8 *	-	-	-	-
	14.8		12.1		11.7		11.4		10.6		-		-	
2132P-D395 ¹	2.9	8.3	2.5	13.0	2.4	19.0	2.3	23.5	2.2	27.2	2.1	30.7	2.0	33.9
2133P-D395 ¹	11.0		9.5		9.1		8.7		8.3		7.9		7.6	
2132P-D399 ¹	4.0	11.0	3.5	17.2	3.3	24.0	3.1	29.3	3.0	34.2	-	-	-	-
	15.1		13.2		12.5		11.7		11.4		-		-	

* indicates intermittent duty only ¹ Tested at 13.5 VDC ² Tested at 110 VAC

VERSA-TWIN 2150 Series Diaphragm Pumps



Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM	Motor Type	Ports
2150P-D35DC	7	26.5	100	6.9	1800	1/2 HP 12V DC Motor, 35 amps	3/4" MNPT
2150P-D39DC	8.3	31.4	100	6.9	1800	1/2 HP 12V DC Motor, 56C, 39 amps	
2150P-D05AC	6.7	25.4	100	6.9	1750	1/2 HP 115-208/230 VAC Motor,1 PH, 50/60 Hz	
2150PX	Replacement pump head						
3430-0633	Diaphragm repair kit						
3430-0634	Diaphragm valve kit						

Model	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS
	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS
	0 PSI/0 BAR		20 PSI/1.4 BAR		40 PSI/2.8 BAR		60 PSI/4.1 BAR		80 PSI/5.5 BAR		100 PSI/6.9 BAR	
2150P-D35DC ¹	7.0	12.9	6.6	17.2	6.0	22.3	5.6	26.8*	5.2	31.2*	5.0	35.3*
	26.5		25.0		22.7		21.2		19.7		18.9	
2150P-D39DC ¹	8.3	15.7	7.6	19.7	6.7	23.8	6.1	27.8	5.7	31.9	5.3	35.9
	31.4		28.8		25.4		23.1		21.6		20.1	
2150P-D05AC ²	6.7	7.6	6.4	7.7	6.0	7.8	5.7	7.9	5.3	8.0	5.0	8.2
	25.4		24.2		22.7		21.6		20.1		18.9	

* Indicates intermittent duty only ¹ Tested at 13.5 VDC ² Tested at 110 VAC

Versa-Twin Accessories



Hosebarb Fly Nut Fittings

O-ring Groove x Hose Barb	Fitting Part Number	Fly nut Part Number	O-ring Part Number
1" x 1" straight	FNS-100100	3B100	1721-0010
1" x 3/4" straight	FNS-10034		
1" x 1/2" straight	FNS-10012		
1" x 1" elbow	FNE-100100		
1" x 3/4" elbow	FNE-10034		




NPT Fly Nut Fittings

Fly Nut connection X NPT			
O-ring Groove x NPT	Fitting Part Number	Fly nut Part Number	O-ring Part Number
1" x 3/4" MNPT *	2404-0427	3B100	1721-0010
1" x 1/2" MNPT	2404-0419		

* Compatible with other fly-nut fittings in catalog

Fly Nut Cap

Description	Part Number
1" NPT with gasket	FNCAP-100N
Replacement gasket	01WSHR13



Unloader Valve

Part Number	Operating PSI	Operating BAR	Use With	Material
3390-0062D	200-600	13.8-41.4	35 & 39 amp DC, and all AC motors	Brass, Buna-N Cup



Pulse Hose

Part Number	Max PSI	Max BAR	Description
3375-0025*	1500	183.4	9 ft Pulse Hose, 3/8" (M)NPT w/ one plugged end

*Used with all pressure switch models when using rigid pipe, rigid or semi-rigid hose (working pressure greater than 600 psi) or any hose less than 150 ft.


Relief Valve



Part Number	Operating PSI	Operating BAR	Material	Ports (Inlet x Outlet)	Use With
3300-0001	400	27.6	Bronze	3/4" MNPT x 3/4" FNPT	35 & 39 amp DC, and all AC motors
3300-0002	200	13.8	Bronze	1/2" MNPT x 1/2" FNPT	18 amp DC motors
3300-0015	150	10.3	Nylon	3/4" MNPT x 3/4" FNPT	18 amp DC motors
3300-0016	250	17.2	Nylon	3/4" MNPT x 3/4" FNPT	35 & 39 amp DC, and all AC motors
3300-0098	400	27.6	Nylon	3/4" MNPT x 3/4" FNPT	18 amp DC motors
3301-0001	400	27.6	Bronze	3/4" MNPT x 3/4" FNPT	35 & 39 amp DC, and all AC motors

Electric-Driven Centrifugal Pumps – Noryl®

Model 9940-9750NRL, 9940-9751NRL, 9940-9753NRL

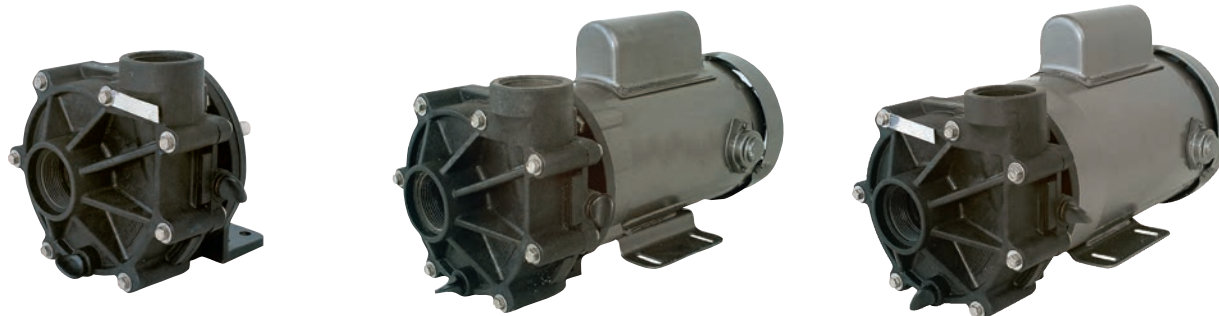

Model 9940-9750NRL

- Noryl, pedestal mount, direct drive
- Port sizes: 1-1/2" NPT inlet
1-1/2" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Noryl (chemical-resistant, coated, cast iron bearing housing)
- Impeller: Noryl
- Pump shaft rotation: CW*
- Shaft seals: Viton/ceramic with polypropylene case
- Weight: 12 lbs./5.4 kg

Model 9940-9751NRL

- Noryl, close-coupled, AC motor-driven, centrifugal pump
- Port sizes: 1-1/2" NPT inlet
1-1/2" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Noryl
- Impeller: Noryl
- Motor: 3/4 hp, 115/208-230V AC
- Shaft seals: Viton/ceramic with polypropylene case
- Weight: 34 lbs./15.4 kg

Model 9940-9753NRL

- Noryl, close-coupled, AC motor-driven, centrifugal pump
- Port sizes: 1-1/2" NPT inlet,
1-1/2" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: Noryl
- Impeller: Noryl
- Motor: 1-1/2 hp, 115/208-230V AC
- Shaft seals: Viton/ceramic with polypropylene case
- Weight: 39 lbs./17.7 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max RPM
9940-9750NRL	140	530	39	2.7	3600
9940-9751NRL	47	178	30	2.1	3450
9940-9753NRL	91	344	35	2.4	3450

9940-9750NRL

U.S. Units

RPM	10 PSI		15 PSI		20 PSI		25 PSI		30 PSI		35 PSI	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
3000	103	1.5	90	1.4	72	1.4	38	1.0				
3450	126	2.4	114	2.4	101	2.2	86	2.2	64	1.9	14	1.4
3600	132	2.7	121	2.6	110	2.5	97	2.5	80	2.3	52	2.0

9940-9750NRL

Metric Units

RPM	0.7 BAR		1.0 BAR		1.4 BAR		1.7 BAR		2.1 BAR		2.4 BAR	
	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP	LPM	HP
3000	390	1.5	341	1.4	273	1.4	144	1.0				
3450	477	2.4	432	2.4	382	2.2	326	2.2	242	1.9	53	1.4
3600	500	2.7	458	2.6	416	2.5	367	2.5	303	2.3	197	2.0

9940-9751NRL, 9940-9753NRL

U.S. Units

MODEL	5 PSI		10 PSI		15 PSI		20 PSI		25 PSI		30 PSI	
	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS
9751	44	7.9	39	8.0	32	8.3	25	8.5	15	8.5	2	8.4
9753	88	14.1	82	14.0	74	14.0	66	14.4	55	14.4	37	13.6

9940-9751NRL, 9940-9753NRL

Metric Units

MODEL	0.3 BAR		0.7 BAR		1.0 BAR		1.4 BAR		1.7 BAR		2.1 BAR	
	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS
9751	167	7.9	148	8.0	121	8.3	95	8.5	57	8.5	8	8.4
9753	333	14.1	310	14.0	280	14.0	250	14.4	208	14.4	140	13.6

Hydraulic-Driven Gear Pump

Model 8304B-HM5C



This positive-displacement pump is ideal for de-icing/anti-icing (pre-wet). Combining the pump and motor as a single unit eliminates the need for shaft alignment or Love-Joy® coupling. The unit's compact size allows it to be used in a wide variety of locations and makes it especially attractive for quick, easy retrofit installations.

Pump

- Optional pressure relief valve safeguards against pressure buildup
- Industry-proven gear pump design, minimal moving parts for longevity
- Brass material not corroded by salt solutions

Motor

- State-of-the-art internal gear gerotor motor maximum service for any application
- Bypass adjustment allows fine tuning of flow control
- 1/2" NPT ports with anti-reverse check safeguards against change in flow direction

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Hyd GPM	Max Hyd LPM
8304B-HM5C	10.4	39.4	100	6.9	4.5	17
8304B	10.4	39.4	100	6.9	4.5	17
8304BV	10.4	39.4	100	6.9	4.5	17

Hydraulic Flow (GPM)	GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI
3.0	6.9	6.5	6.1	5.7	5.3	4.9	4.5	4.1	3.7	3.3	2.9
3.5	8.1	7.7	7.3	6.9	6.6	6.2	5.8	5.4	5.0	4.6	4.2
4.0	9.2	8.9	8.5	8.1	7.8	7.4	7.0	6.7	6.2	5.9	5.5
4.5	10.4	10.1	9.7	9.3	9.0	8.6	8.2	7.9	7.5	7.1	6.8

This data was generated using water as the pumping media. Performance will vary with different viscosity fluids.

Hydraulic pressures vary from 200 to 850 PSI for the performance chart above.

* Product is to be run above 2.0 GPM hydraulic flow.

Aqua-Tiger - 12-Volt Centrifugal Pump

Model 9700B and 9700S



- 12-volt DC motor drive
- Port sizes: 3/4" NPT inlet, 3/4" NPT outlet
- Max. fluid temperature: 140°F/60°C
- Housing: bronze or stainless steel
- Impeller: bronze (9700B) or stainless steel (9700S)
- Seal: lip-type Viton (9700B); mechanical (9700S)
- Weight: 6 lbs./2.7 kg

Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Max Draw
9700B	19	72	7	0.48	11 Amps
9700S	19	72	7	0.48	11 Amps

9700B, 9700S - 13.5 VDC (Alternator Engine Running)

U.S. Units

2 PSI		3 PSI		4 PSI		5 PSI		6 PSI		7 PSI	
GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS	GPM	AMPS
16.9	5.3	14.0	5.0	12.5	4.9	10	4.9	6.5	4.1	2.7	3.7

9700B, 9700S - 13.5 VDC (Alternator Engine Running)

Metric Units

0.14 BAR		0.21 BAR		0.28 BAR		0.34 BAR		0.41 BAR		0.48 BAR	
LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS	LPM	AMPS
62	5.3	53	5.0	47	4.9	38	4.9	25	4.1	10	3.7


Pump Cutaways

Hypro Cutaway Policy

Due to the increase in demand of Hypro cutaways for effective sales promotions, Hypro is offering pump cutaways on a purchase or loan basis. To purchase a cutaway, follow the normal procedure for ordering a pump.

If you would like to borrow a cutaway, order your cutaway and then return it to Hypro (with Return Materials Authorization – RMA – number) before 60 days from your date of receipt. When Hypro receives the cutaway, full credit will be issued.

If you would like a pump or accessory that is not listed on this page, please call the Hypro factory at 800-424-9776 (US) or +44 1954 260097 (Europe)



Roller Pump Cutaways

Model Number	Description	Estimated Weight Ea.	
		US Units	Metric Units
CA6500C	Standard 6-roller cast iron pump	8 lbs.	3.6 kg
CA6500N	Standard 6-roller Ni-resist pump	8 lbs.	3.6 kg
CA6500XL	Standard 6-roller Silver Series XL pump	8 lbs.	3.6 kg
CA7560C	Standard 8-roller cast iron pump	13 lbs.	5.9 kg
CA7560N	Standard 8-roller Ni-resist pump	13 lbs.	5.9 kg
CA7560XL	Standard 8-roller Silver Series XL pump	13 lbs.	5.9 kg



Centrifugal Pump Cutaways

Model Number	Description	Estimated Weight Ea.	
		US Units	Metric Units
CA9006C-O	Standard 540 rpm gear drive cast iron pump	44 lbs.	20.0 kg
CA9006P-O	Standard gear drive polypropylene pump	37 lbs.	16.8 kg
CA9202C	Standard pedestal mount cast iron pump	18 lbs.	8.2 kg
CA9203P-S	Standard pedestal mount polypropylene pump	14 lbs.	6.4 kg
CA9303C-HM4C	Standard hydraulic motor cast iron pump	22 lbs.	10.0 kg
CA9303P-HM4C	Standard hydraulic motor polypropylene pump	15 lbs.	6.8 kg



Diaphragm Pump Cutaways

Model Number	Description	Estimated Weight Ea.	
		US Units	Metric Units
CA9910-D30	Standard 2 diaphragm pump	23 lbs.	10.4 kg
CA9910-D30GRGI	Standard 2 diaphragm pump with GS40GI control unit	33 lbs.	15.0 kg
CA9910-D70	Standard 2 diaphragm pump	25 lbs.	11.3 kg
CA9910-D115	Standard 3 diaphragm pump	35 lbs.	15.9 kg
CA9910-KIT1640	Gear Reduction Kit	6 lbs. 8oz.	2.9 kg



Piston/Plunger Pump Cutaways

Model Number	Description	Estimated Weight Ea.	
		US Units	Metric Units
CA5210C	Standard 5200 series cast iron piston pump	18 lbs.	8.2 kg
CA5320C-HRX	Standard 5300 series cast iron piston pump	10 lbs.	4.5 kg
CA5321C-H	Standard 5321 series cast iron plunger pump	11 lbs.	5.0 kg
CA5324C	Standard 5324 series cast iron piston pump	11 lbs.	5.0 kg

POWERPRO Gasoline Engines

High Quality, Field-Proven Engine



6.5 HP

2.5 HP

13 HP Electric Start

- Available in multiple horsepower options to suit a diverse range of agricultural, industrial, and lawn & garden applications
- Electric-start option available for quick start-up
- Dual-element air filter provides highest degree of filtering
- Cast iron cylinder sleeve for commercial use
- Overhead valve for cleaner operation on all models
- Equipped with a robust low-oil sensor to prevent engine damage
- CARB/EPA certified engines
- Engines can be configured to various Hypro pump models or purchased individually
- Supported with a one-year warranty from Hypro; repair parts available for easy servicing




PowerPro Gasoline Engines, Recoil Start

CARB & EPA Part Number	HP	Shaft Size
2549-0043	2.5	5/8" Keyed
2549-0042	2.5	1/2" with Flat
2541-0045	6.5	3/4" Keyed
2541-0065	6.5	3/4" Keyed-EC listed
2541-0046	6.5	5/8" Threaded
2541-0048	13	1" Keyed
2541-0050	13	1" Threaded

PowerPro Gasoline Engines, Electric Start

CARB & EPA Part Number	HP	Shaft Size
2541-0053	6.5	3/4" Keyed
2541-0054*	6.5	2:1 reduced 3/4" Shaft
2541-0055	6.5	5/8" Threaded
2541-0049	13	1" Keyed
2541-0051	13	1" Threaded

* Special order only, 100 pc. Minimum Order

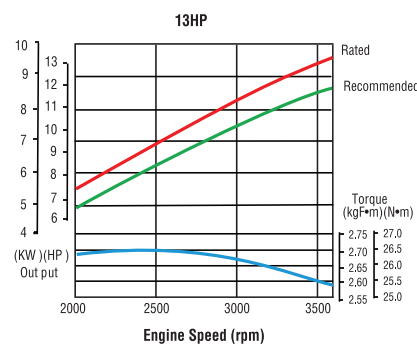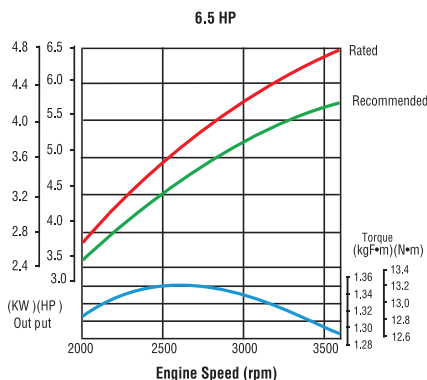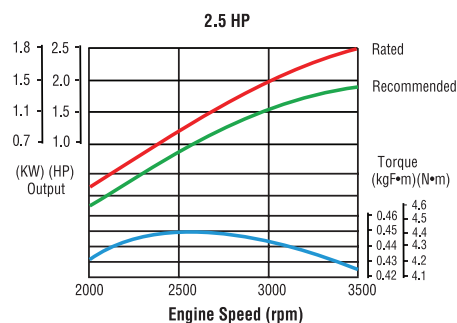

Spray Tips

Broadcast Spray Tips Page 116

- Commonly used for herbicide, insecticide, and fungicides
 - Most effective with a tapered fan, designed for spray overlap, ensuring uniformity

Broadcast Wide-Angle Flat Fan Spray Tips..... Page 140

- Commonly used with fertilizers and specialty applications
 - Wide spray pattern will overlap with adjacent patterns and improve uniformity

Streaming Spray Tips Page 146

- Commonly used for fertilizer applications
 - Single streams are good for heavy crop residues and tilled fields.
 - Multiple streams are good for crops like wheat, where minimal plant burn is required

Banding & Directed Spray Tips Page 152

- Used for various applications including agricultural spraying and orchard/vineyard spraying
 - Even spray tips are designed to eliminate spray pattern overlap; used for spraying between crop rows or specific targeted areas

Specialty Spray Tips Page 166

- Includes boomless nozzles, specialty crops, acid-resistant tips for harsh defoliants, misting nozzles, and more

Selecting the Right Spray Tip



Visit sprayit.hydropumps.com for Hypro's online tip calculator
or download the **FREE SprayIT app** for Apple or Android devices.

Spray tips are often the smallest and most overlooked piece of equipment on a machine. However, they have the greatest effect on the accuracy and efficiency of each application. Hypro offers spray tips for a variety of pressure ranges, flow rates and spray patterns to fit any spray application.

To be effective, a pesticide must be applied properly. To select the correct spray tip for the job, first fully read the pesticide label and look for information on tip type, application rate, spray quality, and environmental restrictions. Then...

- 1) Check which type of spraying technique you will be using – broadcast or banding. (pg 112)
- 2) Check your sprayer speed. (pg 112)
- 3) Select the application rate from the pesticide label. (pg 112)
- 4) Determine the flow rate (GPM) needed for the spray tip, or use the application rate (GPA) chart for the desired tip. (pg 112)
- 5) Select the pattern type. (pg 113)
- 6) Select tip size and pressure that provides the desired flow rate and application rate. (pg 113)
- 7) Check the spray quality tables to be sure the spray tip and pressure create the droplet spectrum you require. (pg 113)

1) Spraying Technique:

Broadcast spraying is when the entire field is to be treated. The width that each tip sprays, adjusted for spray overlap, is the distance between tips on the spray boom.

Band spraying is when planted rows or unplanted gaps are treated. The width that each tip sprays is the width of the treated band.

2) Sprayer Speed:

Forward speed of the spraying machine should be measured accurately. Radar or ultrasound speed sensors should be calibrated after installation or servicing. Wheel-driven speedometers should be calibrated whenever the driving surface changes, such as after cultivation. Speed can be determined if it is known how long it takes to drive a measured distance:

$\text{speed in MPH} = \frac{\text{distance (feet)} \times 60}{\text{time (seconds)} \times 88}$	or	$\text{speed in Km/h} = \frac{\text{distance (m)} \times 3.6}{\text{time (seconds)}}$
--	----	---

Improved vehicle design means that speeds up to 20 MPH are now possible. Higher speeds (10-20 MPH) improve work rates and timeliness; lower speeds (5-10 MPH) give improved canopy penetration and make spray drift control simpler.

3) Application Rate:

Read the pesticide label closely to determine an appropriate spray application rate. If a range of acceptable application rates is listed, choose a rate that best matches your situation.

4) Flow Rate:

Determine the exact flow required from each tip by calculating:

$\text{GPM} = \frac{\text{GPA} \times \text{MPH} \times w}{5,940}$	or	$\text{LPM} = \frac{\text{L/ha} \times \text{Km/h} \times w}{600}$
--	----	--

'W' changes depending on the type of applications:

- Tip spacing (in/m) for broadcast spraying
- Spray width (in/m) for single-tip band spraying or boomless spraying
- Row spacing (in/m) divided by the number of tips per row for directed spraying

Or you can read the application tables throughout this guide.

Selecting the Right Spray Tip

5) Spray Pattern Type:

Flat Fan pattern – Available as a tapered spray for boom applications or an even spray for single tip applications. Even spray tips produce a narrow pattern, where spray is evenly deposited across the spray's width. Tapered spray tips produce an elliptical spray pattern where more of the spray is deposited immediately under the tip. By overlapping tapered sprays, an even distribution across the entire boom can be obtained.



Even



Tapered

Deflect pattern – Also known as anvil or flood tips, deflect tips produce a wide-angled flat pattern when operated at low pressures (10-40 PSI/1-3 BAR). The tips generally produce a coarse, even spray.




Deflect/Anvil/Flood

Cone pattern – These spray tips produce either a solid circular (full cone tips) or a hollow circular footprint (hollow cone tips). Full cones are ideal for spot spraying, whereas hollow cones are used on air-assisted sprayers and directed sprays.



Full Cone



Hollow Cone

Other patterns – Specialty sprays call for specialty patterns, such as off-center or streaming sprays. An off-center pattern is used to extend spray patterns past the boom structure and streaming patterns are commonly used for fertilizer applications.



Off- Center




Streaming

Technology – Standard or Air Induction – Along with the spray pattern, it's important to consider the engineering behind each droplet. Standard droplets produce the traditional solid droplet. Air-induction technology creates air-filled droplets, which increase droplet retention and reduces the number of small droplets prone to drift.



Standard Droplet



Air-Induction

6) Tip Size and Pressure:

Use the flow rate tables provided throughout this guide to select the tip and pressure that provides the flow needed for the application.

Selecting the Right Spray Tip

7) Spray Quality:

An important performance characteristic of a spray tip is both the size and the variation of droplets or spray quality that it produces.

ASABE S572.1 Droplet Size Classification

The American Society of Agricultural and Biological Engineers (ASABE) developed the ASABE S572.1 standard to measure and interpret spray quality from tips.

Spray Quality*	Size of Droplets	VMD Range (Microns**)	Color Code	Retention on Difficult to Wet Leaves	Drift Potential
Extremely Fine	Small	<60	Purple	Excellent	High
Very Fine		61-105	Red	Excellent	
Fine		106-235	Orange	Very Good	
Medium		236-340	Yellow	Good	
Coarse		341-403	Blue	Moderate	
Very Coarse		404-502	Green	Poor	
Extremely Coarse		503-665	White	Very Poor	
Ultra Coarse	Large	>665	Black	Very Poor	Low

*Always read the pesticide label to determine which spray quality is required.

** Estimated from sample reference graph in ASABE/ANSI/ASAE Standard S572.1.

The ASABE S572.1 standard uses eight droplet classification categories, six of which are common for agriculture and horticulture: Very Fine, Fine, Medium, Coarse, Very Coarse and Extremely Coarse. Most agrochemical applications recommend a fine, medium, or coarse spray.

Fine	sprays provide enhanced retention for directed spraying on the target including: - Foliar-acting weed control - Contact-acting fungicides and insecticides	Medium	sprays are the most widely used spray type. - Used by default by most applicators when spray quality is not defined by the label. - Systemic-acting fungicides, insecticides and herbicides.	Coarse	sprays are used with systemic, residual, and soil-applied herbicides.
-------------	--	---------------	--	---------------	---

BCPC Nozzle Classification

The British Crop Protection Council (BCPC) develop a standard for classifying nozzle droplet size. It was shown that to apply a spray solution safely and with the most agronomic value, a spray application needed to be delivered within the appropriate droplet size spectrum. The standard is based on relative comparisons of droplet size using a set of agreed upon reference nozzles. The BCPC standard also has an additional component that allows for further description of the drift potential of a nozzle.

For conventional hydraulic nozzles, spray quality varies according to nozzle size (defined by nozzle flow in l/min) and with pressure, larger sizes and lower pressures produce larger droplets. Spray quality is defined by Volume Median Diameter (VMD) which is the mid-droplet size where half of the volume of spray is in larger and half in smaller droplets. The BCPC International Spray Classification System, groups nozzles into five categories: VERY FINE, FINE, MEDIUM, COARSE AND VERY COARSE, each category covering a range of VMDs.

Fine Sprays	Enhance spray retention on the target. Suitable for small targets and contact acting fungicides and insecticides. There is a higher risk of spray drift with fine sprays.
Medium Sprays	The default option if no another spray quality is indicated.
Coarse Sprays	Use with residual/soil applied herbicides where drift reduction is the priority.

Air Induction (AI) nozzles incorporate air as well as fluid in the droplets. As a result they are not classified in the same way as standard hydraulic nozzles. AI nozzles tend to have a more uniform droplets size and less of the driftable fines. Those at the finer end of the spectrum can be successfully used in place of conventional 'medium' spray quality whilst at the same time reducing spray drift.


Selecting the Right Spray Tip

The following chart has been designed to simplify selection of the correct spray tip type for the agrochemical to be applied. It is based on having good conditions for spraying and should be used in conjunction with the agrochemical manufacturer's label. Increased carrier rates may allow for coarser sprays to reduce risk of drift. Always follow the agrochemical label exactly.

Section	Code	Spray Tp	Common Use	Pattern	Technology	Orifice Material	Nominal Spray Angle	Pressure Range		ASABE Droplet Classification									
								PSI	BAR	XF	VF	F	M	C	VC	XC	UC		
Broadcast	ULD	Ultra Lo-Drift	Weeds	Tapered Flat Fan	Air Induction	Polyacetal	120°	15-115	1-8										
	DB	Drift Beta	Weeds	Tapered Flat Fan	Air Induction	Polyacetal	120°	20-90	1.5-6										
	GAT	GuardianAIR Twin	Plant Health	Tapered Flat Fan	Air Induction	Polyacetal	110°	30-115	2-8										
	GA	GuardianAIR	Plant Health	Tapered Flat Fan	Air Induction	Polyacetal	110°	15-115	1-8										
	GRD	Guardian	Plant Health	Tapered Flat Fan	Pre-Orifice	Polyacetal	120°	15-115	1-8										
	LD	Lo-Drift	Plant Health	Tapered Flat Fan	Pre-Orifice	Polyacetal	80°, 110°	15-70	1-5										
	VP	Variable Pressure	General	Tapered Flat Fan	Elliptical Orifice	Polyacetal	80°, 110°	15-70	1-5										
	VPT	VP Tech	General	Tapered Flat Fan	Elliptical Orifice	Polyacetal	80°, 110°	15-70	1-5										
	TR	Total Range	General	Tapered Flat Fan	Elliptical Orifice	Stainless Steel	80°, 110°	15-70	1-5										
	F	FanTip	General	Tapered Flat Fan	Elliptical Orifice	Polyacetal	80°, 110°	30-60	2-4										
	AVI	Air Injected Anti-Drift	Weeds	Tapered Flat Fan	Air Induction	Ceramic	80°, 110°	30-100	2-7										
	ATW	Air Injected Twin Fan	Plant Health	Tapered Flat Fan	Air Induction	Ceramic	110°	40-100	3-7										
	ADI	Drift Reduction	Plant Health	Tapered Flat Fan	Air Induction	Ceramic	110°	30-70	2-5										
	AXI	Wide Range Fan	General	Tapered Flat Fan	Elliptical Orifice	Ceramic	80°, 110°	20-70	1-5										
Wide	HF	Hi-Flow	Fertilizer	Tapered Flat Fan	Pre-Orifice	Polyacetal	140°	20-80	1.5-6										
	DT	DeflectTip	Weeds & Fertilizer	Flood	Deflection	Polyacetal	80°-160°	10-60	1-4										
	APM	Wide Angle Flood	Weeds & Fertilizer	Flood	Deflection	Ceramic	80°-160°	10-60	1-4										
Stream	ESI	Six Stream	Fertilizer	Streams	Pre-Orifice	Ceramic or Polyacetal	110° Equivalent	15-60	1-4								S		
	CM	Fanjet 0°	Fertilizer	Stream	Round Orifice	PVDF	0°	15-60	1-4								S		
	DC	Flow Regulating Disc	Fertilizer	Stream	Round Orifice	Polyacetal	0°	10-150	1-10								S		
	AMT	Flow Regulating Disc	Fertilizer	Stream	Round Orifice	Ceramic	0°	10-725	1-50								S		
Banding & Directed	DC/CR	SwirlTip Disc/Core	Plant Health	Hollow Cone	Swirl	Polyacetal	25°-110°	10-150	1-10										
	DCC/CRC	Disc and Core	Plant Health	Hollow Cone	Swirl	Ceramic	13°-93°	10-300	1-20										
	HGX	HollowTip Hollow Cone	Plant Health	Hollow Cone	Swirl	Polyacetal	80°	40-150	3-10										
	ATR	Hollow Cone	Plant Health	Hollow Cone	Swirl	Ceramic	80°	40-350	3-24										
	HCA	Hollow Cone	Plant Health	Hollow Cone	Swirl	Ceramic	80°	40-350	3-24										
	TVI	Hollow Cone	Plant Health	Hollow Cone	Air Induction	Ceramic	80°	70-360	5-25										
	AVI	Air Injected Anti-Drift	Plant Health	Tapered Flat Fan	Air Induction	Ceramic	80°	40-350	3-24										
	AXI	Wide Range Fan	Plant Health	Tapered Flat Fan	Elliptical Orifice	Ceramic	80°	40-350	3-24										
	FCX	Full Cone	Plant Health	Full Cone	Swirl	Polyacetal	80°	15-150	1-10										
	DCC/CRC	Disc and Core	Plant Health	Full Cone	Swirl	Ceramic	14°-71°	10-300	1-20										
	E	FanTip Even Flat	Weeds	Even Flat Fan	Elliptical Orifice	Polyacetal	80°	30-60	2-4										
	OC	Off-Center Flat	Unspecialized	Off-Center Fan	Elliptical Orifice	Brass	80°	30-60	2-4										
	OCI	Off-Center Ceramic	Unspecialized	Off-Center Fan	Elliptical Orifice	Ceramic	80°	30-60	2-4										
	AVI-OC	Air Injected Off-Center	Weeds	Off-Center Fan	Air Induction	Ceramic	80°	40-100	3-7										
Special	XT	Boom X Tender	Weeds	Boomless Fan	Pre-Orifice	Stainless or Polyacetal	105°	30-60	2-5										
	ACID F	FanTip	Acid Defoliants	Tapered Flat Fan	Elliptical Orifice	PVDF	110°	30-60	2-4										
	ACID LD	Lo-Drift	Acid Defoliants	Tapered Flat Fan	Pre-Orifice	PVDF	110°	30-60	2-4										
	MISTING	F, HAF, PF, AFD, AF	Cooling & Humidification	Fan or Hollow Cone	Elliptical Orifice or Swirl	Polyacetal	65°-110°	40-150	3-10										
	E	Even	Knapsack	Even Flat Fan	Elliptical Orifice	Polyacetal	80°	15-45	1-3										
	DT/AN	Deflect Tip/Polji Jet	Knapsack	Flood	Deflection	Polyacetal	53°-127°	15-45	1-3										

S These nozzles produce streams to minimize atomization

Understanding Droplet VMD

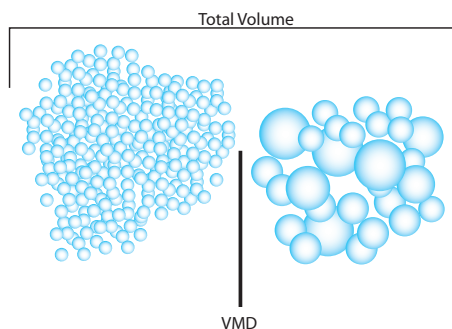


VMD is the droplet size at which 50% of the spray volume is in droplets larger than the VMD and 50% of the volume is in droplets smaller than the VMD (adapted from Matthews 1992).


Understanding Micron Size

Degree of Atomization	Droplet Size (Microns)	Relative Size Related to Common Objects
Fog	Up to 25	Point of a Needle (25 Microns)
Fine Mist	20-100	Human Hair (100 Microns)
Fine Drizzle	100-250	Sewing Thread (150 Microns)
Heavy Drizzle	250-500	Toothbrush Bristle (300 Microns)
Light Rain	500-800	Staple (550 Microns)
Heavy Rain	800-1000	Paper Clip (850 Microns)
Thunderstorm Rain	1000-4000	#2 Pencil Lead (2000 Microns)

Droplet sizes are usually expressed in microns (micrometers). One micron equals one thousandth of a millimeter. Other than the effects of the specific material being sprayed, the four major factors effecting droplet size are: tip style, capacity, spraying pressure and spray pattern type. Lower spraying pressures provide larger droplet sizes, while higher spraying pressures yield smaller droplet sizes. The smallest droplet sizes are achieved by air atomizing tips. Generally speaking, the largest spray droplets are produced by wide-angle, flat hydraulic spray tips. In the hydraulic spray tip series, the smallest droplet sizes are produced by hollow-cone spray tips.

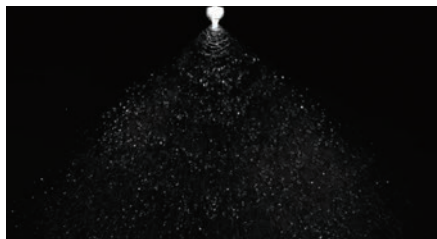

Maximum drift control in a 120° wide spray pattern for even coverage in broadcast applications

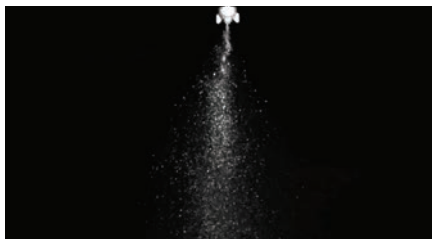

Unique 60° thick spray pattern for a wider coverage area. 120° wide by 60° thick pattern.



See www.hypospraytips.com/certifications for the latest drift reduction standard information.

Metric Units

Tip Size	Droplet Size	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50cm spacing								Drift Reduction Standards
				KM/H								
015	UC	1	0,35	60	53	42	35	28	21	17	14	JKI
	UC	1,5	0,42	72	63	50	42	34	25	20	17	
	XC	2	0,49	84	74	59	49	39	29	24	20	
	VC	3	0,60	103	90	72	60	48	36	29	24	
	C	4	0,69	118	104	83	69	55	41	33	28	
	C	5	0,77	132	116	92	77	62	46	37	31	
	M	6	0,85	146	128	102	85	68	51	41	34	
	M	7	0,92	158	138	110	92	74	55	44	37	
02	M	8	0,98	168	147	118	98	78	59	47	39	
	UC	1	0,46	79	69	55	46	37	28	22	18	
	UC	1,5	0,57	98	86	68	57	46	34	27	23	
	XC	2	0,65	111	98	78	65	52	39	31	26	
	VC	3	0,80	137	120	96	80	64	48	38	32	
	C	4	0,92	158	138	110	92	74	55	44	37	
	M	5	1,03	177	155	124	103	82	62	49	41	
	M	6	1,13	194	170	136	113	90	68	54	45	
025	M	7	1,22	209	183	146	122	98	73	59	49	
	M	8	1,31	225	197	157	131	105	79	63	52	
	UC	1	0,58	99	87	70	58	46	35	28	23	
	XC	1,5	0,71	122	107	85	71	57	43	34	28	
	XC	2	0,82	141	123	98	82	66	49	39	33	
	C	3	1,00	171	150	120	100	80	60	48	40	
	C	4	1,15	197	173	138	115	92	69	55	46	
	M	5	1,29	221	194	155	129	103	77	62	52	
03	M	6	1,41	242	212	169	141	113	85	68	56	
	M	7	1,53	262	230	184	153	122	92	73	61	
	M	8	1,63	279	245	196	163	130	98	78	65	
	UC	1	0,69	118	104	83	69	55	41	33	28	
	UC	1,5	0,85	146	128	102	85	68	51	41	34	
	XC	2	0,98	168	147	118	98	78	59	47	39	
	C	3	1,20	206	180	144	120	96	72	58	48	
	C	4	1,39	238	209	167	139	111	83	67	56	
04	M	5	1,55	266	233	186	155	124	93	74	62	
	M	6	1,70	291	255	204	170	136	102	82	68	
	M	7	1,83	314	275	220	183	146	110	88	73	
	M	8	1,96	336	294	235	196	157	118	94	78	
	UC	1	0,92	158	138	110	92	74	55	44	37	
	UC	1,5	1,13	194	170	136	113	90	68	54	45	
	XC	2	1,31	225	197	157	131	105	79	63	52	
	VC	3	1,60	274	240	192	160	128	96	77	64	
05	XC	4	1,85	317	278	222	185	148	111	89	74	
	C	5	2,07	355	311	248	207	166	124	99	83	
	VC	6	2,26	387	339	271	226	181	136	108	90	
	C	7	2,44	418	366	293	244	195	146	117	98	
	C	8	2,61	447	392	313	261	209	157	125	104	
	UC	1	1,15	197	173	138	115	92	69	55	46	
	UC	1,5	1,41	242	212	169	141	113	85	68	56	
	XC	2	1,63	279	245	196	163	130	98	78	65	
06	VC	3	2,00	343	300	240	200	160	120	96	80	
	C	4	2,31	396	347	277	231	185	139	111	92	
	VC	5	2,58	442	387	310	258	206	155	124	103	
	VC	6	2,83	485	425	340	283	226	170	136	113	
	C	7	3,06	525	459	367	306	245	184	147	122	
	C	8	3,27	561	491	392	327	262	196	157	131	
	UC	1	1,39	238	209	167	139	111	83	67	56	
	UC	1,5	1,70	291	255	204	170	136	102	82	68	
08	XC	2	1,96	336	294	235	196	157	118	94	78	
	VC	3	2,40	411	360	288	240	192	144	115	96	
	C	4	2,77	475	416	332	277	222	166	133	111	
	C	5	3,10	531	465	372	310	248	186	149	124	
	C	6	3,39	581	509	407	339	271	203	163	136	
	C	7	3,67	629	551	440	367	294	220	176	147	
	M	8	3,92	672	588	470	392	314	235	188	157	
	UC	1	1,85	317	278	222	185	148	111	89	74	
	UC	1,5	2,26	387	339	271	226	181	136	108	90	
	XC	2	2,61	447	392	313	261	209	157	125	104	
	VC	3	3,20	549	480	384	320	256	192	154	128	
	C	4	3,70	634	555	444	370	296	222	178	148	
	C	5	4,13	708	620	496	413	330	248	198	165	
	M	6	4,53	777	680	544	453	362	272	217	181	
	M	7	4,89	838	734	587	489	391	293	235	196	
	M	8	5,23	897	785	628	523	418	314	251	209	

*Provisional, awaiting confirmation in official approvals lists.

Droplet size based on ASABE S572.1 standard

Features	
Common Use	Weeds
Pattern	Tapered Flat Fan
Technology	Air Induction
Material	Polyacetal
Spray Angle	120°
Pressure Range	15-115 PSI (1-8 BAR)
Configuration	Tips, FastCap Complete
Part Numbers	
Tips 120°	FastCap 120°
ULD120-015	FC-ULD120-015*
ULD120-02	FC-ULD120-02*
ULD120-025	FC-ULD120-025*
ULD120-03	FC-ULD120-03*
ULD120-04	FC-ULD120-04*
ULD120-05	FC-ULD120-05*
ULD120-06	FC-ULD120-06*
ULD120-08	FC-ULD120-08*
Replacement Strainers	
TS01-100	100 mesh strainer
TS01-50	50 mesh strainer
Replacement Cap Gasket	
1700-0255	

* FastCap version contain tip filters



Drift Beta 120°




120° spray pattern with a unique balance between drift control and coverage. The Drift Beta produces a medium to larger droplet spectrum while minimizing the creation of any small droplets through its unique two piece construction.

- Air-induction technology providing reduced spray drift and improved droplet retention
- Tight control of droplets produced ensuring maximum droplet count in each spray classification
- Small, compact size reduces the chance of accidental breakage
- Available in a FastCap design for easy installation and reliable performance


US Units

Tip Size	Droplet Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000 ft ² 20 inch nozzle spacing				
				4	5	6	8	10	12	15	20	2	3	4	5	
015	UC	20	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15	
	XC	30	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18	
	VC	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20	
	VC	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	C	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	
	C	70	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
	M	80	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29	
	M	90	0.23	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4	0.78	0.52	0.39	0.31	
02	UC	20	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19	
	XC	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	VC	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
	C	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	C	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
	M	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	M	80	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
	M	90	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
025	UC	20	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	
	XC	30	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	VC	40	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34	
	C	50	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
	C	60	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42	
	M	70	0.33	24.5	19.6	16.3	12.3	9.8	8.2	6.5	4.9	1.13	0.75	0.56	0.45	
	M	80	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	M	90	0.38	28.2	22.6	18.8	14.1	11.3	9.4	7.5	5.6	1.30	0.86	0.65	0.52	
03	UC	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29	
	XC	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	VC	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
	C	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46	
	C	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50	
	C	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	M	80	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57	
	M	90	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
04	UC	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
	XC	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	VC	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	VC	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
	VC	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67	
	C	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72	
	C	80	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78	
	C	90	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82	
05	UC	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	XC	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59	
	VC	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68	
	VC	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76	
	VC	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83	
	VC	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90	
	M	80	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97	
	VC	90	0.75	55.7	44.6	37.1	27.8	22.3	18.6	14.9	11.1	2.56	1.71	1.28	1.02	
06	UC	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57	
	XC	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71	
	VC	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82	
	VC	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91	
	VC	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00	
	C	70	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08	
	C	80	0.85	63.1	50.5	42.1	31.6	25.2	21.0	16.8	12.6	2.90	1.93	1.45	1.16	
	C	90	0.90	66.8	53.5	44.6	33.4	26.7	22.3	17.8	13.4	3.07	2.05	1.53	1.23	

Droplet size based on ASABE S572.1 standard.

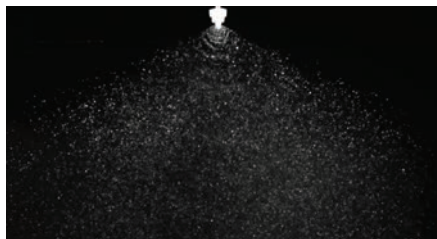

Excellent balance between drift control and coverage with a larger droplet spectrum.

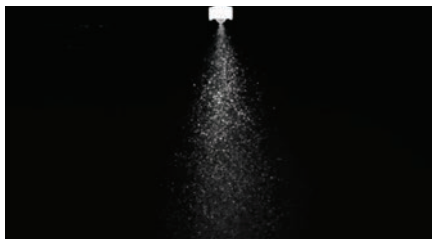

Thick spray pattern provides a larger area of impact for droplets to contact targets.



Z.N.T.




See www.hypospraytips.com/certifications for the latest drift reduction standard information.

Metric Units

Tip Size			Droplet Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha -50 cm Spacing KM/H							Drift Reduction Standards		
7	8	10			12	15	20	25	30	LERAP	Z.N.T.	TCT		
015	UC	1,5	0,42	72	63	50	42	34	25	20	17	★★★★ 75% + 2.0 BAR	66% 2.0 BAR	75% 2.0 BAR
	XC	2	0,49	84	74	59	49	39	29	24	20			
	VC	3	0,60	103	90	72	60	48	36	29	24			
	C	4	0,69	118	104	83	69	55	41	33	28			
	C	5	0,77	132	116	92	77	62	46	37	31			
	M	6	0,85	146	128	102	85	68	51	41	34			
02	UC	1,5	0,57	98	86	68	57	46	34	27	23	★★★★ 75% + 2.0 BAR	66% 2.0 BAR	75% 2.0 BAR
	XC	2	0,65	111	98	78	65	52	39	31	26			
	VC	3	0,80	137	120	96	80	64	48	38	32			
	C	4	0,92	158	138	110	92	74	55	44	37			
	C	5	1,03	177	155	124	103	82	62	49	41			
	M	6	1,13	194	170	136	113	90	68	54	45			
025	XC	1,5	0,71	122	107	85	71	57	43	34	28	★★★★ 75% + 2.0 BAR	66% 2.0 BAR	75% 2.0 BAR
	VC	2	0,82	141	123	98	82	66	49	39	33			
	C	3	1,00	171	150	120	100	80	60	48	40			
	C	4	1,15	197	173	138	115	92	69	55	46			
	C	5	1,29	221	194	155	129	103	77	62	52			
	M	6	1,41	242	212	169	141	113	85	68	56			
03	XC	1,5	0,85	146	128	102	85	68	51	41	34	★★★★ 75% + 2.0-3.0 BAR	66% 2.0-3.0 BAR	75% 2.0-3.0 BAR
	VC	2	0,98	168	147	118	98	78	59	47	39			
	C	3	1,20	206	180	144	120	96	72	58	48			
	C	4	1,39	238	209	167	139	111	83	67	56			
	C	5	1,55	266	233	186	155	124	93	74	62			
	M	6	1,70	291	255	204	170	136	102	82	68			
04	UC	1,5	1,13	194	170	136	113	90	68	54	45	★★★★ 75% + 2.0-3.0 BAR	66% 2.0-3.0 BAR	75% 2.0-3.0 BAR
	XC	2	1,31	225	197	157	131	105	79	63	52			
	VC	3	1,60	274	240	192	160	128	96	77	64			
	C	4	1,85	317	278	222	185	148	111	89	74			
	C	5	2,07	355	311	248	207	166	124	99	83			
	C	6	2,26	387	339	271	226	181	136	108	90			
05	UC	1,5	1,41	242	212	169	141	113	85	68	56	★★★★ 75% + 2.0-6.0 BAR	66% 2.0-6.0 BAR	75% 2.0-6.0 BAR
	VC	2	1,63	279	245	196	163	130	98	78	65			
	XC	3	2,00	343	300	240	200	160	120	96	80			
	C	4	2,31	396	347	277	231	185	139	111	92			
	C	5	2,58	442	387	310	258	206	155	124	103			
	VC	6	2,83	485	425	340	283	226	170	136	113			
06	XC	1,5	1,70	291	255	204	170	136	102	82	68	★★★★ 75% + 2.0-6.0 BAR	66% 2.0-6.0 BAR	75% 2.0-6.0 BAR
	VC	2	1,96	336	294	235	196	157	118	94	78			
	VC	3	2,40	411	360	288	240	192	144	115	96			
	C	4	2,77	475	416	332	277	222	166	133	111			
	C	5	3,10	531	465	372	310	248	186	149	124			
	C	6	3,39	581	509	407	339	271	203	163	136			

Droplet size based on ASABE S572.1 standard

Features	
Common Use	Weeds
Pattern	Tapered Flat Fan
Technology	Air Induction
Material	Polyacetal
Spray Angle	120°
Pressure Range	20-90 PSI (1.5-6 BAR)
Configuration	Tips
Part Numbers	
Tips 120°	FastCap 120°
30DB015F120	FC-DB120-015
30DB02F120	FC-DB120-02
30DB025F120	FC-DB120-025
30DB03F120	FC-DB120-03
30DB04F120	FC-DB120-04
30DB05F120	FC-DB120-05
30DB06F120	FC-DB120-06
Replacement Cap Gasket	
22W11MF64	



GuardianAIR Twin 110°




GuardianAIR Twin spray tips are the best choice for high coverage applications where on-target spray delivery is important. They are ideal for low crops with complex canopies, such as vegetables, where thorough coverage of the target and protection of the surroundings are of high importance.


- High-coverage forward and rear facing fans help penetrate complex canopies
- Engineered to provide better coverage with more drops per gallon or litre compared to other air-induced sprays
- Easy-to-install, patent-pending locking ring and o-ring seal design
- FastCap complete includes tip, cap, gasket and is available with or without a filter

US Units

Tip Size	Droplet Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ²			
				MPH								20 inch nozzle spacing			
				4	5	6	8	10	12	15	20	2	3	4	5
02	C	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
	C	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	M	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	M	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
	M	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
	M	80	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	M	90	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	F	100	0.32	23.8	19.0	15.8	11.9	9.5	7.9	6.3	4.8	1.09	0.73	0.55	0.44
025	C	30	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	C	40	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34
	M	50	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	M	60	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42
	M	70	0.33	24.5	19.6	16.3	12.3	9.8	8.2	6.5	4.9	1.13	0.75	0.56	0.45
	M	80	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	M	90	0.38	28.2	22.6	18.8	14.1	11.3	9.4	7.5	5.6	1.30	0.86	0.65	0.52
	M	100	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
03	VC	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
	C	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	M	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46
	M	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
	M	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	M	80	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57
	M	90	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	M	100	0.47	34.9	27.9	23.3	17.4	14.0	11.6	9.3	7.0	1.60	1.07	0.80	0.64
035	VC	30	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	C	40	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	M	50	0.39	29.0	23.2	19.3	14.5	11.6	9.7	7.7	5.8	1.33	0.89	0.66	0.53
	M	60	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	M	70	0.46	34.2	27.3	22.8	17.1	13.7	11.4	9.1	6.8	1.57	1.05	0.78	0.63
	M	80	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
	M	90	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72
	M	100	0.55	40.8	32.7	27.2	20.4	16.3	13.6	10.9	8.2	1.88	1.25	0.94	0.75
04	VC	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	C	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	M	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	M	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
	M	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72
	M	80	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78
	M	90	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	M	100	0.63	46.8	37.4	31.2	23.4	18.7	15.6	12.5	9.4	2.15	1.43	1.07	0.86
05	VC	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	C	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68
	M	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76
	M	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
	M	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90
	M	80	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97
	M	90	0.75	55.7	44.6	37.1	27.8	22.3	18.6	14.9	11.1	2.56	1.71	1.28	1.02
	M	100	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08
06	VC	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71
	C	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	M	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91
	M	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00
	M	70	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08
	M	80	0.85	63.1	50.5	42.1	31.6	25.2	21.0	16.8	12.6	2.90	1.93	1.45	1.16
	M	90	0.90	66.8	53.5	44.6	33.4	26.7	22.3	17.8	13.4	3.07	2.05	1.53	1.23
	M	100	0.95	70.5	56.4	47.0	35.3	28.2	23.5	18.8	14.1	3.24	2.16	1.62	1.30
08	VC	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
	VC	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09
	C	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21
	C	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34
	M	70	1.06	78.7	63.0	52.5	39.4	31.5	26.2	21.0	15.7	3.61	2.41	1.81	1.45
	M	80	1.13	83.9	67.1	55.9	42.0	33.6	28.0	22.4	16.8	3.85	2.57	1.93	1.54
	M	90	1.20	89.1	71.3	59.4	44.6	35.6	29.7	23.8	17.8	4.09	2.73	2.05	1.64
	M	100	1.26	93.6	74.8	62.4	46.8	37.4	31.2	24.9	18.7	4.30	2.86	2.15	1.72
08	M	115	1.36	101	80.8	67.3	50.5	40.4	33.7	26.9	20.2	4.64	3.09	2.32	1.86



1. Integrated Locking Collar allows for precise and easy installation
2. Twin Air Induced spray patterns [30° offset] for superior coverage
3. Available with or without filter options

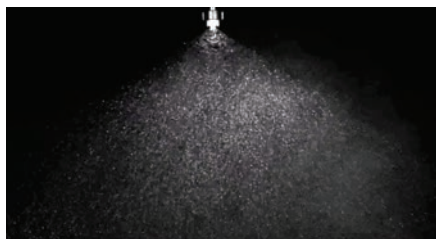

110° air inducted spray pattern for class leading coverage on a variety of targets.



Sturdy twin 30° incline/decline patterns provide superior canopy penetration through pattern integrity.



Z.N.T.

See www.hypospraytips.com/certifications for the latest drift reduction standard information.

Metric Units

Tip Size			Droplet Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm Spacing KM/H								Drift Reduction Standards			Features	
					7	8	10	12	15	20	25	30	LERAP	JKI	Z.N.T.	Common Use	Plant Health
02	C	2	0,65		111	98	78	65	52	39	31	26	★★ 50-75% 2.0-2.25 BAR ★ 25-50% 2.25-2.5 BAR		66% 2.0-2.5* BAR		
	M	3	0,80		137	120	96	80	64	48	38	32					
	M	4	0,92		158	138	110	92	74	55	44	37					
	M	5	1,03		177	155	124	103	82	62	49	41					
	M	6	1,13		194	170	136	113	90	68	54	45					
	F	7	1,22		209	183	146	122	98	73	59	49					
F	8	1,31		225	197	157	131	105	79	63	52						
025	VC	2	0,82		141	123	98	82	66	49	39	33	★★ 50-75% 2.0-2.25 BAR ★ 25-50% 2.25-2.5BAR	50% 2.0-2.5 BAR Ref # G-1872	66% 2.0-2.5* BAR		
	C	3	1,00		171	150	120	100	80	60	48	40					
	M	4	1,15		197	173	138	115	92	69	55	46					
	M	5	1,29		221	194	155	129	103	77	62	52					
	M	6	1,41		242	212	169	141	113	85	68	56					
	M	7	1,53		262	230	184	153	122	92	73	61					
M	8	1,63		279	245	196	163	130	98	78	65						
03	VC	2	0,98		168	147	118	98	78	59	47	39	★★ 50-75% 2.0-3.0 BAR ★ 25-50% 3.0-4.0 BAR	50% 2.0-3.0 BAR Ref # G-1874	66% 2.0-3.5* BAR		
	C	3	1,20		206	180	144	120	96	72	58	48					
	M	4	1,39		238	209	167	139	111	83	67	56					
	M	5	1,55		266	233	186	155	124	93	74	62					
	M	6	1,70		291	255	204	170	136	102	82	68					
	M	7	1,83		314	275	220	183	146	110	88	73					
M	8	1,96		336	294	235	196	157	118	94	78						
035	VC	2	1,14		195	171	137	114	91	68	55	46	★ 25-50% 3.0-4.0 BAR				
	C	3	1,40		240	210	168	140	112	84	67	56					
	M	4	1,62		278	243	194	162	130	97	78	65					
	M	5	1,81		310	272	217	181	145	109	87	72					
	M	6	1,98		339	297	238	198	158	119	95	79					
	M	7	2,14		367	321	257	214	171	128	103	86					
M	8	2,29		393	344	275	229	183	137	110	92						
04	C	2	1,31		225	197	157	131	105	79	63	52	★ 25-50% 2.0-3.0 BAR	50% 2.0-2.5 BAR Ref # G-1875	66% 2.0-3.0* BAR		
	M	3	1,60		274	240	192	160	128	96	77	64					
	M	4	1,85		317	278	222	185	148	111	89	74					
	M	5	2,07		355	311	248	207	166	124	99	83					
	M	6	2,26		387	339	271	226	181	136	108	90					
	M	7	2,44		418	366	293	244	195	146	117	98					
M	8	2,61		447	392	313	261	209	157	125	104						
05	VC	2	1,63		279	245	196	163	130	98	78	65	★★ 50-75% 2.0-3.0 BAR ★ 25-50% 3.0-3.5 BAR	50% 2.0-3.0 BAR Ref # G-1876	66% 2.0-3.5* BAR		
	C	3	2,00		343	300	240	200	160	120	96	80					
	M	4	2,31		396	347	277	231	185	139	111	92					
	M	5	2,58		442	387	310	258	206	155	124	103					
	M	6	2,83		485	425	340	283	226	170	136	113					
	M	7	3,06		525	459	367	306	245	184	147	122					
M	8	3,27		561	491	392	327	262	196	157	131						
06	VC	2	1,96		336	294	235	196	157	118	94	78	★★ 50-75% 2.0-3.0 BAR ★ 25-50% 3.0-3.5 BAR	50% 2.0-4.0 BAR Ref # G-1877	66% 2.0-3.5* BAR		
	C	3	2,40		411	360	288	240	192	144	115	96					
	M	4	2,77		475	416	332	277	222	166	133	111					
	M	5	3,10		531	465	372	310	248	186	149	124					
	M	6	3,39		581	509	407	339	271	203	163	136					
	M	7	3,67		629	551	440	367	294	220	176	147					
M	8	3,92		672	588	470	392	314	235	188	157						
08	VC	2	2,61		447	392	313	261	209	157	125	104	★★ 50-75% 2.0-3.0 BAR ★ 25-50% 3.0-4.0 BAR	50% 2.0-6.0 BAR Ref # G-1878	66% 2.0-3.5* BAR		
	VC	3	3,20		549	480	384	320	256	192	154	128					
	C	4	3,70		634	555	444	370	296	222	178	148					
	M	5	4,13		708	620	496	413	330	248	198	165					
	M	6	4,53		777	680	544	453	362	272	217	181					
	M	7	4,89		838	734	587	489	391	293	235	196					
M	8	5,23		897	785	628	523	418	314	251	209						


* Provisional-awating confirmation in official approvals lists.

Droplet size based on ASABE S572.1 standard.

Use at 3 bar for optimum coverage.



120° wide, non-air induced spray pattern for superior coverage in many spraying applications.

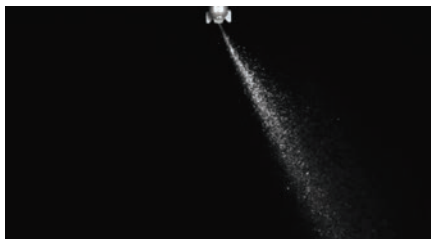


20° pattern incline; alternate nozzles for a twin spray pattern, excellent for suspension based tank mixes.

Metric Units

Tip Size	Droplet Size	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha -50 cm Spacing							
				KM/H							
01	F	1	0.23	39	35	28	23	18	14	11	9
		1.5	0.28	48	42	34	28	22	17	13	11
		2	0.33	57	50	40	33	26	20	16	13
		3	0.40	69	60	48	40	32	24	19	16
		4	0.46	79	69	55	46	37	28	22	18
		5	0.52	89	78	62	52	42	31	25	21
		6	0.57	98	86	68	57	46	34	27	23
		7	0.61	105	92	73	61	49	37	29	24
015	F	8	0.65	111	98	78	65	52	39	31	26
		1	0.35	60	53	42	35	28	21	17	14
		1.5	0.42	72	63	50	42	34	25	20	17
		2	0.49	84	74	59	49	39	29	24	20
		3	0.60	103	90	72	60	48	36	29	24
		4	0.69	118	104	83	69	55	41	33	28
		5	0.77	132	116	92	77	62	46	37	31
		6	0.85	146	128	102	85	68	51	41	34
02	F	7	0.92	158	138	110	92	74	55	44	37
		8	0.98	168	147	118	98	78	59	47	39
		1	0.46	79	69	55	46	37	28	22	18
		1.5	0.57	98	86	68	57	46	34	27	23
		2	0.65	111	98	78	65	52	39	31	26
		3	0.80	137	120	96	80	64	48	38	32
		4	0.92	158	138	110	92	74	55	44	37
		5	1.03	177	155	124	103	82	62	49	41
025	F	6	1.13	194	170	136	113	90	68	54	45
		7	1.22	209	183	146	122	98	73	59	49
		8	1.31	225	197	157	131	105	79	63	52
		1	0.58	99	87	70	58	46	35	28	23
		1.5	0.71	122	107	85	71	57	43	34	28
		2	0.82	141	123	98	82	66	49	39	33
		3	1.00	171	150	120	100	80	60	48	40
		4	1.15	197	173	138	115	92	69	55	46
03	F	5	1.29	221	194	155	129	103	77	62	52
		6	1.41	242	212	169	141	113	85	68	56
		7	1.53	262	230	184	153	122	92	73	61
		8	1.63	279	245	196	163	130	98	78	65
		1	0.69	118	104	83	69	55	41	33	28
		1.5	0.85	146	128	102	85	68	51	41	34
		2	0.98	168	147	118	98	78	59	47	39
		3	1.20	206	180	144	120	96	72	58	48
04	F	4	1.39	238	209	167	139	111	83	67	56
		5	1.55	266	233	186	155	124	93	74	62
		6	1.70	291	255	204	170	136	102	82	68
		7	1.83	314	275	220	183	146	110	88	73
		8	1.96	336	294	235	196	157	118	94	78
		1	0.92	158	138	110	92	74	55	44	37
		1.5	1.13	194	170	136	113	90	68	54	45
		2	1.31	225	197	157	131	105	79	63	52
05	F	3	1.60	274	240	192	160	128	96	77	64
		4	1.85	317	278	222	185	148	111	89	74
		5	2.07	355	311	248	207	166	124	99	83
		6	2.26	387	339	271	226	181	136	108	90
		7	2.44	418	366	293	244	195	146	117	98
		8	2.61	447	392	313	261	209	157	125	104
		1	1.15	197	173	138	115	92	69	55	46
		1.5	1.41	242	212	169	141	113	85	68	56
06	F	2	1.63	279	245	196	163	130	98	78	65
		3	2.00	343	300	240	200	160	120	96	80
		4	2.31	396	347	277	231	185	139	111	92
		5	2.58	442	387	310	258	206	155	124	103
		6	2.83	485	425	340	283	226	170	136	113
		7	3.06	525	459	367	306	245	184	147	122
		8	3.27	561	491	392	327	262	196	157	131
		1	1.39	238	209	167	139	111	83	67	56
08	F	1.5	1.70	291	255	204	170	136	102	82	68
		2	1.96	336	294	235	196	157	118	94	78
		3	2.40	411	360	288	240	192	144	115	96
		4	2.77	475	416	332	277	222	166	133	111
		5	3.10	531	465	372	310	248	186	149	124
		6	3.39	581	509	407	339	271	203	163	136
		7	3.67	629	551	440	367	294	220	176	147
		8	3.92	672	588	470	392	314	235	188	157
08	F	1	1.85	317	278	222	185	148	111	89	74
		1.5	2.26	387	339	271	226	181	136	108	90
		2	2.61	447	392	313	261	209	157	125	104
		3	3.20	549	480	384	320	256	192	154	128
		4	3.70	634	555	444	370	296	222	178	148
		5	4.13	708	620	496	413	330	248	198	165
		6	4.53	777	680	544	453	362	272	217	181
		7	4.89	838	734	587	489	391	293	235	196
08	F	8	5.23	897	785	628	523	418	314	251	209
		1	1.85	317	278	222	185	148	111	89	74

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Plant Health
Pattern	Tapered Flat Fan
Technology	Pre-Orifice
Material	Polyacetal
Spray Angle	120°
Pressure Range	15-115 PSI (1-8 BAR)
Configuration	FastCap Complete
Part Numbers	
FastCaps® 120°	
GRD120-01	
GRD120-015	
GRD120-02	
GRD120-025	
GRD120-03	
GRD120-04	
GRD120-05	
GRD120-06	
GRD120-08	
Replacement Tip Strainer	
TS02-100	100 mesh strainer for size 015-03
TS02-50	50 mesh strainer for size 04-08
Replacement Cap Gasket	
22W11MF64	



Lo-Drift 80° & 110°




The Lo-Drift is the original drift-reducing tip. The special two-part construction includes a pre-orifice, which reduces the number of drift prone droplets.

- Significantly reduces spray drift, widening the operational window
- Balanced droplet size for effective, on-target spray
- Available in acid-resistant PVDF (See page 169)


US Units

Tip Size	Droplet Size		Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing										GAL/1000 Ft ²			
	80°	110°			MPH										20 inch nozzle spacing			
015	C	M	15	0.09	6.7	5.3	4.5	3.3	2.7	2.2	1.8	1.3	0.31	0.20	0.15	0.12		
	M	M	20	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15		
	M	M	30	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18		
	M	M	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20		
	M	M	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23		
	M	M	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25		
	M	F	70	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27		
02	C	C	15	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16		
	C	M	20	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19		
	C	M	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23		
	M	M	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27		
	M	M	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30		
	M	M	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33		
	M	M	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35		
025	-	C	15	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20		
	-	M	20	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25		
	-	M	30	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30		
	-	M	40	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34		
	-	M	50	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38		
	-	M	60	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42		
	-	M	70	0.33	24.5	19.6	16.3	12.3	9.8	8.2	6.5	4.9	1.13	0.75	0.56	0.45		
03	C	C	15	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25		
	C	C	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29		
	C	C	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35		
	C	M	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41		
	M	M	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46		
	M	M	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50		
	M	M	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55		
04	C	C	15	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33		
	C	C	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38		
	C	C	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48		
	C	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55		
	M	M	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61		
	M	M	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67		
	M	M	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72		
05	VC	C	15	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42		
	C	C	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48		
	C	C	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59		
	C	C	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68		
	C	M	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76		
	C	M	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83		
	M	M	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90		
06	VC	VC	15	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50		
	VC	VC	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57		
	VC	C	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71		
	C	C	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82		
	C	C	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91		
	C	C	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00		
	C	M	70	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08		
08	XC	VC	15	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67		
	XC	VC	20	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78		
	VC	C	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94		
	VC	C	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09		
	C	C	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21		
	C	C	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34		
	C	C	70	1.06	78.7	63.0	52.5	39.4	31.5	26.2	21.0	15.7	3.61	2.41	1.81	1.45		

Droplet size based on ASABE S572.1 standard.



1. Non-Air Inducted; Pre-orifice design for excellent performance with suspension solutions
2. Dual component construction
3. Material: Polyacetal or PVDF

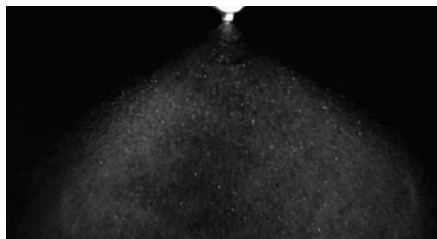

110° wide, drift reducing design that is excellent for suspension based tank mixes.



Pre-orifice design limits the formation of small droplets; reducing drift potential with a medium droplet spectrum.



See www.hypospraytips.com/certifications for the latest drift reduction standard information.

Metric Units

Tip Size	BCPC Droplet Size		ASABE Droplet Size		Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm spacing KM/H								Drift Reduction Standards	
	80°	110°	80°	110°			7	8	10	12	15	20	25	30	LERAP	TCT
015			C	M	1	0,35	60	53	42	35	28	21	17	14		
			M	M	1,5	0,42	72	63	50	42	34	25	20	17		
			M	M	2	0,49	84	74	59	49	39	29	24	20		
			M	M	3	0,60	103	90	72	60	48	36	29	24		
			M	M	4	0,69	118	104	83	69	55	41	33	28		
02			M	F	5	0,77	132	116	92	77	62	46	37	31		
			C	C	1	0,46	79	69	55	46	37	28	22	18		
			C	M	1,5	0,57	98	86	68	57	46	34	27	23		
			C	M	2	0,65	111	98	78	65	52	39	31	26		
			M	M	3	0,80	137	120	96	80	64	48	38	32		
025			M	M	4	0,92	158	138	110	92	74	55	44	37		
			M	M	5	1,03	177	155	124	103	82	62	49	41		
			C	C	1	0,58	99	87	70	58	46	35	28	23		
			M	M	1,5	0,71	122	107	85	71	57	43	34	28		
			M	M	2	0,82	141	123	98	82	66	49	39	33		
03			M	M	3	1,00	171	150	120	100	80	60	48	40		
			M	M	4	1,15	197	173	138	115	92	69	55	46		
			M	M	5	1,29	221	194	155	129	103	77	62	52		
			C	C	1	0,69	118	104	83	69	55	41	33	28		
			C	C	1,5	0,85	146	128	102	85	68	51	41	34		
04			C	C	2	0,98	168	147	118	98	78	59	47	39		
			M	M	3	1,20	206	180	144	120	96	72	58	48		
			M	M	4	1,39	238	209	167	139	111	83	67	56		
			M	M	5	1,55	266	233	186	155	124	93	74	62		
			C	C	1	0,92	158	138	110	92	74	55	44	37		
05			C	C	1,5	1,13	194	170	136	113	90	68	54	45		
			C	C	2	1,31	225	197	157	131	105	79	63	52		
			C	C	3	1,60	274	240	192	160	128	96	77	64		
			M	M	4	1,85	317	278	222	185	148	111	89	74		
			M	M	5	2,07	355	311	248	207	166	124	99	83		
06			VC	C	1	1,15	197	173	138	115	92	69	55	46		
			C	C	1,5	1,41	242	212	169	141	113	85	68	56		
			C	C	2	1,63	279	245	196	163	130	98	78	65		
			C	C	3	2,00	343	300	240	200	160	120	96	80		
			C	C	4	2,31	396	347	277	231	185	139	111	92		
08			M	M	5	2,58	442	387	310	258	206	155	124	103		
			VC	VC	1	1,39	238	209	167	139	111	83	67	56		
			VC	C	1,5	1,70	291	255	204	170	136	102	82	68		
			VC	C	2	1,96	336	294	235	196	157	118	94	78		
			C	C	3	2,40	411	360	288	240	192	144	115	96		
08			C	C	4	2,77	475	416	332	277	222	166	133	111		
			C	C	5	3,10	531	465	372	310	248	186	149	124		
			XC	VC	1	1,85	317	278	222	185	148	111	89	74		
			VC	C	1,5	2,26	387	339	271	226	181	136	108	90		
			VC	C	2	2,61	447	392	313	261	209	157	125	104		
08			VC	C	3	3,20	549	480	384	320	256	192	154	128		
			C	C	4	3,70	634	555	444	370	296	222	178	148		
			C	C	5	4,13	708	620	496	413	330	248	198	165		


BCPC CODING FINE MEDIUM COARSE

BCPC droplet size based on BCPC standard.


ASABE droplet size based on ASABE S572.1 standard.

Features	
Common Use	Plant Health
Pattern	Tapered Flat Fan
Technology	Pre-Orifice
Material	Polyacetal
Spray Angle	80° & 110°
Pressure Range	15-70 PSI (1-5 BAR)
Configuration	Tips, FastCap
Part Numbers	
Tips 80°	Caps (25 Packs)
LD80-015	CAP00-015
LD80-02	CAP00-02
LD80-03	CAP00-03
LD80-04	CAP00-04
LD80-05	CAP00-05
LD80-06	CAP00-06
LD80-08	CAP00-08
Tips 110°	Caps (25 Packs)
LD110-015	CAP00-015
LD110-02	CAP00-02
LD110-025*	CAP00-025
LD110-03	CAP00-03
LD110-04*	CAP00-04
LD110-05*	CAP00-05
LD110-06*	CAP00-06
LD110-08	CAP00-08

*Approved by JKI

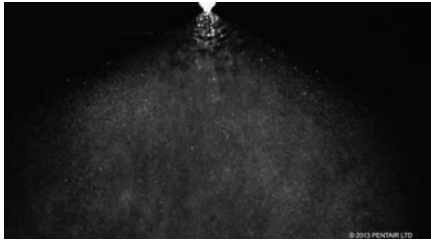

Low pressure performance allows for complete pattern formation and even coverage down to 15 psi (1 BAR).

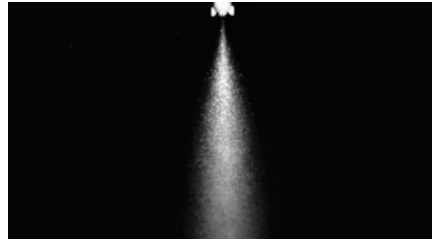

Dense spray pattern of medium to fine droplets provides superior coverage.



See www.hypospraytips.com/certifications for the latest drift reduction standard information.

Metric Units

Tip Size	BCPC Droplet Size		ASEBE Droplet Size		Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha -50 cm spacing KM/H							
	80°	110°	80°	110°			7	8	10	12	15	20	25	30
015	M	F	M	M	1	0,35	60	53	42	35	28	21	17	14
	M	F	M	F	1,5	0,42	72	63	50	42	34	25	20	17
	F	F	F	F	2	0,49	84	74	59	49	39	29	24	20
	F	F	F	F	3	0,60	103	90	72	60	48	36	29	24
	F	F	F	F	4	0,69	118	104	83	69	55	41	33	28
	F	F	F	F	5	0,77	132	116	92	77	62	46	37	31
02	M	F	M	M	1	0,46	79	69	55	46	37	28	22	18
	M	F	M	F	1,5	0,57	98	86	68	57	46	34	27	23
	F	F	F	F	2	0,65	111	98	78	65	52	39	31	26
	F	F	F	F	3	0,80	137	120	96	80	64	48	38	32
	F	F	F	F	4	0,92	158	138	110	92	74	55	44	37
	F	F	F	F	5	1,03	177	155	124	103	82	62	49	41
025	-	M	-	M	1	0,58	99	87	70	58	46	35	28	23
	-	M	-	M	1,5	0,71	122	107	85	71	57	43	34	28
	-	F	-	F	2	0,82	141	123	98	82	66	49	39	33
	-	F	-	F	3	1,00	171	150	120	100	80	60	48	40
	-	F	-	F	4	1,15	197	173	138	115	92	69	55	46
	-	F	-	F	5	1,29	221	194	155	129	103	77	62	52
03	C	M	M	M	1	0,69	118	104	83	69	55	41	33	28
	C	M	M	M	1,5	0,85	146	128	102	85	68	51	41	34
	M	F	M	F	2	0,98	168	147	118	98	78	59	47	39
	F	F	F	F	3	1,20	206	180	144	120	96	72	58	48
	F	F	F	F	4	1,39	238	209	167	139	111	83	67	56
	F	F	F	F	5	1,55	266	233	186	155	124	93	74	62
035	-	C	-	M	1	0,81	139	122	97	81	65	49	39	32
	-	C	-	M	1,5	0,99	170	149	119	99	79	59	48	40
	-	M	-	F	2	1,14	195	171	137	114	91	68	55	46
	-	M	-	F	3	1,40	240	210	168	140	112	84	67	56
	-	F	-	F	4	1,62	278	243	194	162	130	97	78	65
	-	F	-	F	5	1,81	310	272	217	181	145	109	87	72
04	C	C	C	M	1	0,92	158	138	110	92	74	55	44	37
	C	C	C	M	1,5	1,13	194	170	136	113	90	68	54	45
	M	M	M	M	2	1,31	225	197	157	131	105	79	63	52
	M	M	M	F	3	1,60	274	240	192	160	128	96	77	64
	M	F	F	F	4	1,85	317	278	222	185	148	111	89	74
	M	F	F	F	5	2,07	355	311	248	207	166	124	99	83
05	C	C	C	M	1	1,15	197	173	138	115	92	69	55	46
	C	C	C	M	1,5	1,41	242	212	169	141	113	85	68	56
	C	M	M	M	2	1,63	279	245	196	163	130	98	78	65
	M	M	M	F	3	2,00	343	300	240	200	160	120	96	80
	M	M	M	F	4	2,31	396	347	277	231	185	139	111	92
	M	F	F	F	5	2,58	442	387	310	258	206	155	124	103
06	C	C	C	C	1	1,39	238	209	167	139	111	83	67	56
	C	C	C	M	1,5	1,70	291	255	204	170	136	102	82	68
	C	M	C	M	2	1,96	336	294	235	196	157	118	94	78
	M	M	C	M	3	2,40	411	360	288	240	192	144	115	96
	M	M	M	F	4	2,77	475	416	332	277	222	166	133	111
	M	M	M	F	5	3,10	531	465	372	310	248	186	149	124
08	-	-	-	C	1	1,85	317	278	222	185	148	111	89	74
	-	-	-	C	1,5	2,26	387	339	271	226	181	136	108	90
	-	-	-	M	2	2,61	447	392	313	261	209	157	125	104
	-	-	-	M	3	3,20	549	480	384	320	256	192	154	128
	-	-	-	M	4	3,70	634	555	444	370	296	222	178	148
	-	-	-	M	5	4,13	708	620	496	413	330	248	198	165
10	-	-	-	VC	1	2,31	396	347	277	231	185	139	111	92
	-	-	-	C	1,5	2,83	485	425	340	283	226	170	136	113
	-	-	-	C	2	3,27	561	491	392	327	262	196	157	131
	-	-	-	M	3	4,00	686	600	480	400	320	240	192	160
	-	-	-	M	4	4,62	792	693	554	462	370	277	222	185
	-	-	-	M	5	5,16	885	774	619	516	413	310	248	206
15	-	-	-	VC	1	3,46	593	519	415	346	277	208	166	138
	-	-	-	VC	1,5	4,24	727	636	509	424	339	254	204	170
	-	-	-	VC	2	4,90	840	735	588	490	392	294	235	196
	-	-	-	C	3	6,00	1029	900	720	600	480	360	288	240
	-	-	-	M	4	6,93	1188	1040	832	693	554	416	333	277
	-	-	-	M	5	7,75	1329	1163	930	775	620	465	372	310

BCPC CODING FINE MEDIUM COARSE

BCPC droplet size based on BCPC standard.

ASABE droplet size based on ASABE S572.1 standard.

Features	
Common Use	General
Pattern	Tapered Flat Fan
Technology	Elliptical Orifice
Material	Polyacetal
Spray Angle	80° & 110°
Pressure Range	15-70 PSI (1-5 BAR)
Configuration	Tips, FastCap
Part Numbers	
Tips 80°	FastCaps 80°
VP80-015	FC-VP80-015
VP80-02	FC-VP80-02
VP80-03	FC-VP80-03
VP80-04	FC-VP80-04
VP80-05	FC-VP80-05
VP80-06	FC-VP80-06
Tips 110°	FastCaps 110°
VP110-015	FC-VP110-015
VP110-02	FC-VP110-02
VP110-025	FC-VP110-025
VP110-03*	FC-VP110-03
VP110-035	FC-VP110-035
VP110-04*	FC-VP110-04
VP110-05*	FC-VP110-05
VP110-06	FC-VP110-06
VP110-08	FC-VP110-08
VP110-10	FC-VP110-10
VP110-15	FC-VP110-15
Replacement Cap Gasket	
22W11MF64	

*Approved by JKI



VP Tech 80° & 110°




One VP nozzle and a removable blanking insert in a standard TwinCap for 30° inclined spray.

- Variable pressure tips maintain constant spray angle over a wide pressure range down to 15 psi (1 bar)
- Available in 80° and 110° versions to work at different boom heights
- Alternate incline for optimum coverage of vertical targets


US Units

Tip Size	Droplet Size		Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ²				
	80°	110°			MPH								20 inch nozzle spacing				
					4	5	6	8	10	12	15	20	2	3	4	5	
02	M	M	15	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16	
	M	F	20	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19	
	F	F	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	F	F	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
	F	F	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	F	F	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
025	F	F	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	-	M	15	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20	
	-	M	20	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	
	-	F	30	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	-	F	40	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34	
	-	F	50	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
03	-	F	60	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42	
	-	F	70	0.33	24.5	19.6	16.3	12.3	9.8	8.2	6.5	4.9	1.13	0.75	0.56	0.45	
	M	M	15	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	
	M	M	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29	
	M	F	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	F	F	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
035	F	F	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46	
	F	F	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50	
	F	F	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	-	M	15	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29	
	-	M	20	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34	
	-	M	30	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
04	-	F	40	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	-	F	50	0.39	29.0	23.2	19.3	14.5	11.6	9.7	7.7	5.8	1.33	0.89	0.66	0.53	
	-	F	60	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59	
	-	F	70	0.46	34.2	27.3	22.8	17.1	13.7	11.4	9.1	6.8	1.57	1.05	0.78	0.63	
	C	M	15	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
	M	M	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
05	M	M	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	M	F	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	M	F	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
	F	F	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67	
	F	F	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72	
	C	M	15	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42	
06	C	M	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	M	M	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59	
	M	F	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68	
	M	F	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76	
	F	F	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83	
	F	F	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90	
06	C	C	15	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50	
	C	M	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57	
	C	M	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71	
	C	M	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82	
	M	F	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91	
	M	F	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00	
06	M	F	70	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08	


Droplet size based on ASABE S572.1 standard.



1. Inclined spray for vertical targets
2. Removable blanking insert
3. Fully formed spray pattern at low pressures

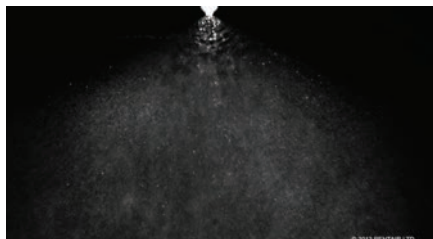

Low pressure performance allows for complete pattern formation and even coverage down to 15 psi (1 BAR).

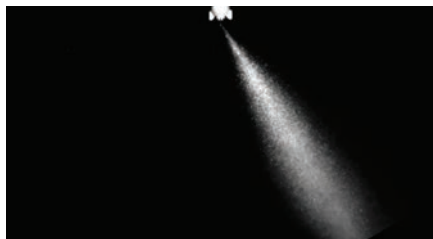

Inclined 30° spray pattern of medium to fine droplets provides superior coverage and canopy penetration.

Metric Units

Tip Size	BCPC Droplet Size		ASABE Droplet Size		Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm spacing KM/H							
	80°	110°	80°	110°			7	8	10	12	15	20	25	30
02	M	F	M	M	1	0,46	79	69	55	46	37	28	22	18
	M	F	M	F	1,5	0,57	98	86	68	57	46	34	27	23
	F	F	F	F	2	0,65	111	98	78	65	52	39	31	26
	F	F	F	F	3	0,80	137	120	96	80	64	48	38	32
	F	F	F	F	4	0,92	158	138	110	92	74	55	44	37
	F	F	F	F	5	1,03	177	155	124	103	82	62	49	41
025	-	M	-	M	1	0,58	99	87	70	58	46	35	28	23
	-	M	-	M	1,5	0,71	122	107	85	71	57	43	34	28
	-	F	-	F	2	0,82	141	123	98	82	66	49	39	33
	-	F	-	F	3	1,00	171	150	120	100	80	60	48	40
	-	F	-	F	4	1,15	197	173	138	115	92	69	55	46
	-	F	-	F	5	1,29	221	194	155	129	103	77	62	52
03	C	M	M	M	1	0,69	118	104	83	69	55	41	33	28
	C	M	M	M	1,5	0,85	146	128	102	85	68	51	41	34
	M	F	M	F	2	0,98	168	147	118	98	78	59	47	39
	M	F	F	F	3	1,20	206	180	144	120	96	72	58	48
	F	F	F	F	4	1,39	238	209	167	139	111	83	67	56
	F	F	F	F	5	1,55	266	233	186	155	124	93	74	62
035	-	C	-	M	1	0,81	139	122	97	81	65	49	39	32
	-	C	-	M	1,5	0,99	170	149	119	99	79	59	48	40
	-	M	-	M	2	1,14	195	171	137	114	91	68	55	46
	-	M	-	F	3	1,40	240	210	168	140	112	84	67	56
	-	F	-	F	4	1,62	278	243	194	162	130	97	78	65
	-	F	-	F	5	1,81	310	272	217	181	145	109	87	72
04	C	C	C	M	1	0,92	158	138	110	92	74	55	44	37
	C	C	M	M	1,5	1,13	194	170	136	113	90	68	54	45
	M	M	M	M	2	1,31	225	197	157	131	105	79	63	52
	M	M	M	F	3	1,60	274	240	192	160	128	96	77	64
	M	F	F	F	4	1,85	317	278	222	185	148	111	89	74
	M	F	F	F	5	2,07	355	311	248	207	166	124	99	83
05	C	C	C	M	1	1,15	197	173	138	115	92	69	55	46
	C	C	C	M	1,5	1,41	242	212	169	141	113	85	68	56
	C	M	M	M	2	1,63	279	245	196	163	130	98	78	65
	M	M	M	F	3	2,00	343	300	240	200	160	120	96	80
	M	M	M	F	4	2,31	396	347	277	231	185	139	111	92
	M	F	F	F	5	2,58	442	387	310	258	206	155	124	103
06	C	C	C	C	1	1,39	238	209	167	139	111	83	67	56
	C	C	C	M	1,5	1,70	291	255	204	170	136	102	82	68
	C	M	C	M	2	1,96	336	294	235	196	157	118	94	78
	M	M	C	M	3	2,40	411	360	288	240	192	144	115	96
	M	M	M	F	4	2,77	475	416	332	277	222	166	133	111
	M	M	M	F	5	3,10	531	465	372	310	248	186	149	124


BCPC CODING FINE MEDIUM COARSE

BCPC drplet size based on BCPC standard.


ASABE droplet size based on ASABE S572.1 standard.

Features	
Common Use	General
Pattern	Tapered Flat Fan
Technology	Elliptical Orifice
Material	Polyacetal
Spray Angle	80° & 110°
Pressure Range	15-70 PSI (1-5 BAR)
Configuration	TwinCap
Part Numbers	
Tips 80°	
VPT80-02	
VPT80-03	
VPT80-04	
VPT80-05	
VPT80-06	
Tips 110°	
VPT110-02	
VPT110-025	
VPT110-03	
VPT110-035	
VPT110-04	
VPT110-05	
VPT110-06	
Replacement Parts	
VPTCAP	Cap & Blanking Insert
30Q3834	Blanking Insert
22W11MF64	Cap Gasket

Add suffix "-H" for Hardi compatible products

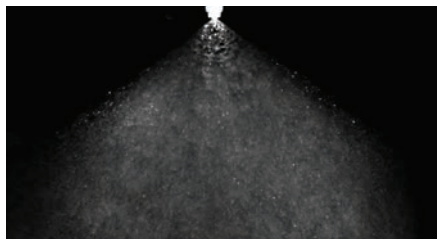

80° or 110° wide spray pattern producing a smaller droplet spectrum with a stainless steel orifice.

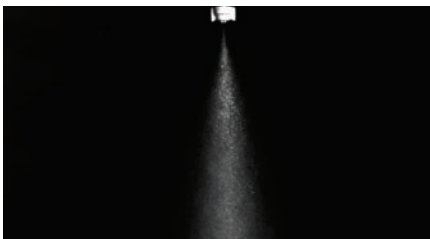

Dense spray pattern of smaller droplets to match many insecticide and fungicide applications.

Metric Units

Tip Size	Droplet Size		Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm spacing KM/H							
	80°	110°			7	8	10	12	15	20	25	30
01	M	F	1	0,23	39	35	28	23	18	14	11	9
	F	F	1,5	0,28	48	42	34	28	22	17	13	11
	F	F	2	0,33	57	50	40	33	26	20	16	13
	VF	VF	3	0,40	69	60	48	40	32	24	19	16
	VF	VF	4	0,46	79	69	55	46	37	28	22	18
	VF	VF	5	0,52	89	78	62	52	42	31	25	21
015	M	M	1	0,35	60	53	42	35	28	21	17	14
	F	F	1,5	0,42	72	63	50	42	34	25	20	17
	F	F	2	0,49	84	74	59	49	39	29	24	20
	F	F	3	0,60	103	90	72	60	48	36	29	24
	VF	F	4	0,69	118	104	83	69	55	41	33	28
	VF	VF	5	0,77	132	116	92	77	62	46	37	31
02	M	M	1	0,46	79	69	55	46	37	28	22	18
	F	F	1,5	0,57	98	86	68	57	46	34	27	23
	F	F	2	0,65	111	98	78	65	52	39	31	26
	F	F	3	0,80	137	120	96	80	64	48	38	32
	F	F	4	0,92	158	138	110	92	74	55	44	37
	VF	F	5	1,03	177	155	124	103	82	62	49	41
03	C	M	1	0,69	118	104	83	69	55	41	33	28
	M	M	1,5	0,85	146	128	102	85	68	51	41	34
	M	M	2	0,98	168	147	118	98	78	59	47	39
	F	F	3	1,20	206	180	144	120	96	72	58	48
	F	F	4	1,39	238	209	167	139	111	83	67	56
	F	F	5	1,55	266	233	186	155	124	93	74	62
04	C	C	1	0,92	158	138	110	92	74	55	44	37
	M	M	1,5	1,13	194	170	136	113	90	68	54	45
	M	M	2	1,31	225	197	157	131	105	79	63	52
	M	F	3	1,60	274	240	192	160	128	96	77	64
	F	F	4	1,85	317	278	222	185	148	111	89	74
	F	F	5	2,07	355	311	248	207	166	124	99	83
05	C	C	1	1,15	197	173	138	115	92	69	55	46
	C	M	1,5	1,41	242	212	169	141	113	85	68	56
	C	M	2	1,63	279	245	196	163	130	98	78	65
	M	F	3	2,00	343	300	240	200	160	120	96	80
	M	F	4	2,31	396	347	277	231	185	139	111	92
	F	F	5	2,58	442	387	310	258	206	155	124	103
06	C	C	1	1,39	238	209	167	139	111	83	67	56
	C	C	1,5	1,70	291	255	204	170	136	102	82	68
	C	C	2	1,96	336	294	235	196	157	118	94	78
	M	M	3	2,40	411	360	288	240	192	144	115	96
	M	M	4	2,77	475	416	332	277	222	166	133	111
	M	F	5	3,10	531	465	372	310	248	186	149	124
08	VC	C	1	1,85	317	278	222	185	148	111	89	74
	C	C	1,5	2,26	387	339	271	226	181	136	108	90
	C	C	2	2,61	447	392	313	261	209	157	125	104
	C	M	3	3,20	549	480	384	320	256	192	154	128
	M	M	4	3,70	634	555	444	370	296	222	178	148
	M	M	5	4,13	708	620	496	413	330	248	198	165
10	VC	VC	1	2,31	396	347	277	231	185	139	111	92
	VC	C	1,5	2,83	485	425	340	283	226	170	136	113
	VC	C	2	3,27	561	491	392	327	262	196	157	131
	C	M	3	4,00	686	600	480	400	320	240	192	160
	C	M	4	4,62	792	693	554	462	370	277	222	185
	M	M	5	5,16	885	774	619	516	413	310	248	206
15	XC	VC	1	3,46	593	519	415	346	277	208	166	138
	VC	VC	1,5	4,24	727	636	509	424	339	254	204	170
	VC	VC	2	4,90	840	735	588	490	392	294	235	196
	C	C	3	6,00	1029	900	720	600	480	360	288	240
	C	M	4	6,93	1188	1040	832	693	554	416	333	277
	C	M	5	7,75	1329	1163	930	775	620	465	372	310

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	General
Pattern	Tapered Flat Fan
Technology	Elliptical Orifice
Material	Stainless Steel
Spray Angle	80° & 110°
Pressure Range	15-70 PSI (1-5 BAR)
Configuration	Tips, FastCap
Part Numbers	
Tips 80°	FastCaps 80°
TR80-01	FC-TR80-01
TR80-015	FC-TR80-015
TR80-02	FC-TR80-02
TR80-03	FC-TR80-03
TR80-04	FC-TR80-04
TR80-05	FC-TR80-05
TR80-06	FC-TR80-06
TR80-08	FC-TR80-08
TR80-10*	FC-TR80-10*
TR80-15*	FC-TR80-15*
Tips 110°	FastCaps 110°
TR110-01	FC-TR110-01
TR110-015	FC-TR110-015
TR110-02	FC-TR110-02
TR110-03	FC-TR110-03
TR110-04	FC-TR110-04
TR110-05	FC-TR110-05
TR110-06	FC-TR110-06
TR110-08	FC-TR110-08
TR110-10*	FC-TR110-10*
TR110-15*	FC-TR110-15*
Replacement Cap Gasket	
22W11MF64	

* All stainless steel tips



FanTip 80° & 110°




The FanTip is a general spray tip that produces a mixed droplet spectrum over the 30-60 psi (2-4 bar) operational pressure range. It is good for broadcast applications.

- Economical option for general spraying
- Simple one-piece design
- Polyacetal construction for superior product life compared to stainless steel or brass
- Available in acid-resistant PVDF (see page 168)


US Units

Tip Size	Droplet Size		Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing										GAL/1000 Ft ²				
					MPH										20 inch nozzle spacing				
	80°	110°	4	5	6	8	10	12	15	20	2	3	4	5					
0067	F	-	30	0.058	4.3	3.4	2.9	2.2	1.7	1.4	1.1	0.9	0.20	0.13	0.10	0.08			
	VF	-	40	0.067	5.0	4.0	3.3	2.5	2.0	1.7	1.3	1.0	0.23	0.15	0.11	0.09			
	VF	-	50	0.075	5.6	4.5	3.7	2.8	2.2	1.9	1.5	1.1	0.26	0.17	0.13	0.10			
	VF	-	60	0.082	6.1	4.9	4.1	3.0	2.4	2.0	1.6	1.2	0.28	0.19	0.14	0.11			
01	VF	F	30	0.09	6.7	5.3	4.5	3.3	2.7	2.2	1.8	1.3	0.31	0.20	0.15	0.12			
	VF	F	40	0.10	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5	0.34	0.23	0.17	0.14			
	VF	F	50	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15			
	VF	F	60	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16			
015	F	F	30	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18			
	F	F	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20			
	F	F	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23			
	VF	F	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25			
02	M	F	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23			
	F	F	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27			
	F	F	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30			
	F	F	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33			
03	C	M	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35			
	M	F	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41			
	M	F	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46			
	F	F	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50			
04	C	M	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48			
	M	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55			
	M	F	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61			
	M	F	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67			
05	C	M	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59			
	M	M	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68			
	M	M	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76			
	M	M	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83			
06	C	M	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71			
	C	M	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82			
	C	M	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91			
	C	M	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00			
08	VC	C	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94			
	C	C	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09			
	C	C	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21			
	C	C	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34			
10	VC	C	30	0.87	64.6	51.7	43.1	32.3	25.8	21.5	17.2	12.9	2.97	1.98	1.48	1.19			
	C	C	40	1.00	74.3	59.4	49.5	37.1	29.7	24.8	19.8	14.9	3.41	2.27	1.71	1.36			
	C	C	50	1.12	83.2	66.5	55.4	41.6	33.3	27.7	22.2	16.6	3.82	2.55	1.91	1.53			
	C	C	60	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66			
15	VC	C	30	1.30	96.5	77.2	64.4	48.3	38.6	32.2	25.7	19.3	4.43	2.96	2.22	1.77			
	C	C	40	1.50	111	89.1	74.3	55.7	44.6	37.1	29.7	22.3	5.12	3.41	2.56	2.05			
	C	C	50	1.68	125	99.8	83.2	62.4	49.9	41.6	33.3	24.9	5.73	3.82	2.86	2.29			
	C	C	60	1.84	137	109	91.1	68.3	54.6	45.5	36.4	27.3	6.27	4.18	3.14	2.51			
20	VC	C	30	1.73	128	103	85.6	64.2	51.4	42.8	34.3	25.7	5.90	3.93	2.95	2.36			
	VC	C	40	2.00	149	119	99.0	74.3	59.4	49.5	39.6	29.7	6.82	4.55	3.41	2.73			
	VC	C	50	2.24	166	133	111	83.2	66.5	55.4	44.4	33.3	7.64	5.09	3.82	3.06			
	VC	C	60	2.45	182	146	121	91.0	72.8	60.6	48.5	36.4	8.35	5.57	4.18	3.34			

Droplet size based on ASABE S572.1 standard.



1. Simple; Non-Air Inducted technology
2. Polyacetal; single piece design
3. Available in many sizes to meet your flow rate needs

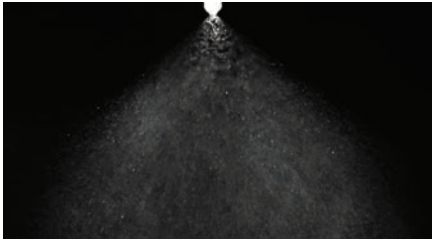

80° or 110° wide spray patterns; broad flow range and droplet spectrum to fit many spraying applications.



Polyacetal construction provides a wear resistant orifice to ensure pattern integrity.

Metric Units

Tip Size	BCPC Droplet Size		ASABE Droplet Size		Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha- 50 cm Spacing KM/H							
	80°	110°	80°	110°			7	8	10	12	15	20	25	30
0067	-	-	F	-	2	0,22	38	33	26	22	18	13	11	9
	-	-	VF	-	2,5	0,25	43	38	30	25	20	15	12	10
	-	-	VF	-	3	0,27	46	41	32	27	22	16	13	11
	-	-	VF	-	4	0,31	53	47	37	31	25	19	15	12
01	F	F	VF	F	2	0,33	57	50	40	33	26	20	16	13
	F	F	VF	F	2,5	0,37	63	56	44	37	30	22	18	15
	F	F	VF	F	3	0,40	69	60	48	40	32	24	19	16
	F	F	VF	F	4	0,46	79	69	55	46	37	28	22	18
015	F	F	F	F	2	0,49	84	74	59	49	39	29	24	20
	F	F	F	F	2,5	0,55	94	83	66	55	44	33	26	22
	F	F	F	F	3	0,60	103	90	72	60	48	36	29	24
	F	F	VF	F	4	0,69	118	104	83	69	55	41	33	28
02	M	F	M	F	2	0,65	111	98	78	65	52	39	31	26
	M	F	F	F	2,5	0,73	125	110	88	73	58	44	35	29
	F	F	F	F	3	0,80	137	120	96	80	64	48	38	32
	F	F	F	F	4	0,92	158	138	110	92	74	55	44	37
025	M	F	-	F	2	0,82	141	123	98	82	66	49	39	33
	M	F	-	F	2,5	0,91	156	137	109	91	73	55	44	36
	F	F	-	F	3	1,00	171	150	120	100	80	60	48	40
	F	F	-	F	4	1,15	197	173	138	115	92	69	55	46
03	C	M	C	M	2	0,98	168	147	118	98	78	59	47	39
	M	M	M	F	2,5	1,10	189	165	132	110	88	66	53	44
	M	F	M	F	3	1,20	206	180	144	120	96	72	58	48
	F	F	F	F	4	1,39	238	209	167	139	111	83	67	56
04	C	M	C	M	2	1,31	225	197	157	131	105	79	63	52
	C	M	M	M	2,5	1,46	250	219	175	146	117	88	70	58
	M	M	M	M	3	1,60	274	240	192	160	128	96	77	64
	F	F	M	F	4	1,85	317	278	222	185	148	111	89	74
05	C	M	C	M	2	1,63	279	245	196	163	130	98	78	65
	C	M	M	M	2,5	1,83	314	275	220	183	146	110	88	73
	M	M	M	M	3	2,00	343	300	240	200	160	120	96	80
	M	M	M	M	4	2,31	396	347	277	231	185	139	111	92
06	C	M	C	M	2	1,96	336	294	235	196	157	118	94	78
	C	M	C	M	2,5	2,19	375	329	263	219	175	131	105	88
	C	M	C	M	3	2,40	411	360	288	240	192	144	115	96
	C	M	C	M	4	2,77	475	416	332	277	222	166	133	111
08	C	C	VC	C	2	2,61	447	392	313	261	209	157	125	104
	C	C	C	C	2,5	2,92	501	438	350	292	234	175	140	117
	C	C	C	C	3	3,20	549	480	384	320	256	192	154	128
	C	C	C	C	4	3,70	634	555	444	370	296	222	178	148
10	C	C	VC	C	2	3,27	561	491	392	327	262	196	157	131
	C	C	C	C	2,5	3,65	626	548	438	365	292	219	175	146
	C	C	C	C	3	4,00	686	600	480	400	320	240	192	160
	C	C	C	C	4	4,62	792	693	554	462	370	277	222	185
15	C	C	VC	C	2	4,90	840	735	588	490	392	294	235	196
	C	C	VC	C	2,5	5,48	939	822	658	548	438	329	263	219
	C	C	VC	C	3	6,00	1029	900	720	600	480	360	288	240
	C	C	C	C	4	6,93	1188	1040	832	693	554	416	333	277
20	C	C	VC	C	2	6,53	1119	980	784	653	522	392	313	261
	C	C	VC	C	2,5	7,30	1251	1095	876	730	584	438	350	292
	C	C	VC	C	3	8,00	1371	1200	960	800	640	480	384	320
	C	C	VC	C	4	9,24	1584	1386	1109	924	739	554	444	370

BCPC CODING FINE MEDIUM COARSE

BCPC drplet size based on BCPC standard.

ASABE droplet size based on ASABE S572.1 standard.

Features		
Common Use	General	
Pattern	Tapered Flat Fan	
Technology	Elliptical Orifice	
Material	Polyacetal	
Spray Angle	80° & 110°	
Pressure Range	30-60 PSI (2-4 BAR)	
Configuration	Tip	
Part Numbers		
Tips 80°	Tips 110°	Caps (25 Pack)
F80-0067	-	CAP00-20
F80-01	F110-01	CAP00-01
F80-015	F110-015	CAP00-015
F80-02	F110-02	CAP00-02
F80-03	F110-03	CAP00-03
F80-04	F110-04	CAP00-04
F80-05	F110-05	CAP00-05
F80-06	F110-06	CAP00-06
F80-08	F110-08	CAP00-08
F80-10	F110-10	CAP00-10
F80-15	F110-15	CAP00-15
F80-20	F110-20	CAP00-20



Ceramic AVI Twin 110°



The Albuz® AVI Twin (ATW) brings drift control and coverage together. Using proven AVI technology, the AVI Twin draws air into the tip, mixing it with the spray to create a twin spray of drift resistant air-filled droplets. Drift is greatly reduced, spraying the canopy with dual trajectories to improve coverage.

- Coverage-enhancing twin patterns from a single tip
- Drift-reducing AVI venturi technology
- 60-degrees of separation between fans
- Pressures from 40 to 100 psi (3-7 bar)
- Wear-resistant Albuz ceramic orifices

US Units

Tip Size	Droplet Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000 ^{ft}			
				MPH								20 inch nozzle spacing			
				4	5	6	8	10	12	15	20	2	3	4	5
01	XC	40	0.10	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5	0.34	0.23	0.17	0.14
	XC	50	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15
	XC	60	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16
	C	70	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18
	C	80	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19
	C	90	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20
015	C	100	0.16	11.9	9.5	7.9	5.9	4.8	4.0	3.2	2.4	0.55	0.36	0.27	0.22
	XC	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20
	XC	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
	XC	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25
	C	70	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	C	80	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29
02	C	90	0.23	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4	0.78	0.52	0.39	0.31
	C	100	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
	XC	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	XC	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	XC	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
	C	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
03	C	80	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	C	90	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	C	100	0.32	23.8	19.0	15.8	11.9	9.5	7.9	6.3	4.8	1.09	0.73	0.55	0.44
	XC	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	XC	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46
	XC	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
04	VC	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	VC	80	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57
	C	90	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	C	100	0.47	34.9	27.9	23.3	17.4	14.0	11.6	9.3	7.0	1.60	1.07	0.80	0.64
	XC	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	XC	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
05	XC	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
	VC	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72
	VC	80	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78
	C	90	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	C	100	0.63	46.8	37.4	31.2	23.4	18.7	15.6	12.5	9.4	2.15	1.43	1.07	0.86
	XC	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68
05	XC	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76
	XC	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
	VC	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90
	VC	80	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97
	C	90	0.75	55.7	44.6	37.1	27.8	22.3	18.6	14.9	11.1	2.56	1.71	1.28	1.02
	C	100	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Plant Health
Pattern	Tapered Flat Fan
Technology	Air Induction
Material	Ceramic
Spray Angle	110°
Pressure Range	40-100 PSI (3-7 BAR)
Configuration	Tips
Part Numbers	
Tips 110°	Caps (25 Pack)
ATW-11001	CAP01-01
ATW-110015	CAP01-015
ATW-11002	CAP01-02
ATW-11003	CAP01-03
ATW-11004	CAP01-04
ATW-11005	CAP01-05



Ceramic ADI 110°



The Albuz® ADI anti-drift spray tip provides a versatile balance of drift reduction and target coverage. The proven pre-orifice design creates droplets that are well suited for a wide range of spray applications. The ceramic orifice resists wear better than other materials and will provide acre after acre of service.

- Droplet size balances drift reduction and target coverage
- Simple and effective pre-orifice design
- Versatile and long-lasting tip

US Units

Tip Size	Droplet Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing MPH								GAL/1000 Ft ² 20 inch nozzle spacing				
				4	5	6	8	10	12	15	20	2	3	4	5	
01	M	30	0.09	6.7	5.3	4.5	3.3	2.7	2.2	1.8	1.3	0.31	0.20	0.15	0.12	
	M	40	0.10	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5	0.34	0.23	0.17	0.14	
	F	50	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15	
	F	60	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16	
015	M	30	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18	
	M	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20	
	M	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	M	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	
02	M	30	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
	M	40	0.20	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	M	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	M	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
03	M	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	M	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
	M	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46	
	M	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50	
04	M	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	VC	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	C	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	C	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
	C	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67	
	M	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72	

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Plant Health
Pattern	Tapered Flat Fan
Technology	Air Induction
Material	Ceramic
Spray Angle	110°
Pressure Range	30-70 PSI (2-5 BAR)
Configuration	Tips
Application Selection Guide	
Foliar Contact	Excellent
Foliar Systemic	Excellent
Soil Applied	Very Good
Drift Control	Good
Part Numbers	
Tips 110°	Caps (25 Pack)
ADI-11001	CAP00-01
ADI-110015	CAP00-015
ADI-11002	CAP00-02
ADI-11003	CAP00-03
ADI-11004	CAP00-04



Ceramic AXI 80° & 110°



The Albus® AXI wide pressure range ceramic spray tips are suited for creating numerous fine to medium droplets. The ceramic orifice of the AXI will provide long service life even when spraying abrasive chemicals.

- Adjustable droplet size according to pressure
- Maintains good spray distribution and makes larger droplets at low pressures
- FastCap includes tip, cap and gasket
- 80° fan models ideal for use in directed spray applications
(See page 159 for more information)

US Units

Tip Size	Droplet Size		Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing										GAL/1000 Ft ²				
	80°	110°			MPH										20 inch nozzle spacing				
015	F	F	20	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15			
	F	F	30	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18			
	F	F	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20			
	F	F	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23			
	VF	VF	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25			
	VF	VF	70	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27			
02	F	F	20	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19			
	F	F	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23			
	F	F	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27			
	F	F	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30			
	F	F	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33			
	F	F	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35			
03	M	M	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29			
	M	M	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35			
	M	M	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41			
	F	F	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46			
	F	F	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50			
	F	F	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55			
04	M	M	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38			
	M	M	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48			
	M	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55			
	M	M	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61			
	F	M	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67			
	F	F	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72			
05	M	M	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48			
	M	M	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59			
	M	M	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68			
	M	M	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76			
	M	M	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83			
	M	M	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90			
06	M	C	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57			
	M	M	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71			
	M	M	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82			
	M	M	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91			
	M	M	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00			
	M	M	70	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08			

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	General
Pattern	Tapered Flat Fan
Technology	Elliptical Orifice
Material	Ceramic
Spray Angle	80° & 110°
Pressure Range	20-70 PSI (1.5-5 BAR)
Configuration	Tips, FastCap
Part Numbers	
Tips 80°	FastCaps 80°
AXI-80015	FC-AXI-80015
AXI-8002	FC-AXI-8002
AXI-8003	FC-AXI-8003
AXI-8004	FC-AXI-8004
AXI-8005	FC-AXI-8005
AXI-8006	FC-AXI-8006
Tips 110°	FastCaps 110°
AXI-110015	FC-AXI-110015
AXI-11002	FC-AXI-11002
AXI-110025	-
AXI-11003	FC-AXI-11003
AXI-11004	FC-AXI-11004
AXI-11005	FC-AXI-11005
AXI-11006	FC-AXI-11006
Replacement Cap Gasket	
22W11MF64	



Hi-Flow 140°




The Hypro® Hi-Flow tip is the best way to outfit a sprayer to achieve wide-angle coverage plus drift control. The 140° pattern ensures unmatched uniformity across the spray boom and allows lower spray heights to reduce the risk of drift during sensitive applications.

- Frequently used with fertilizer/herbicide mixtures for early season weed control
- Straight-through design to reduce clogging and drift
- Incredibly uniform application across the boom
- Lower spray heights and pre-orifice technology reduce drift
- Fits directly on standard nozzle bodies

US Units

Tip Size	Droplet Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ²			
				4	5	6	8	10	12	15	20	2	3	4	5
08	UC	20	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78
	UC	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
	UC	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09
	UC	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21
	XC	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34
	XC	70	1.06	78.7	63.0	52.5	39.4	31.5	26.2	21.0	15.7	3.61	2.41	1.81	1.45
10	UC	80	1.13	83.9	67.1	55.9	42.0	33.6	28.0	22.4	16.8	3.85	2.57	1.93	1.54
	UC	20	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97
	UC	30	0.87	64.6	51.7	43.1	32.3	25.8	21.5	17.2	12.9	2.97	1.98	1.48	1.19
	UC	40	1.00	74.3	59.4	49.5	37.1	29.7	24.8	19.8	14.9	3.41	2.27	1.71	1.36
	UC	50	1.12	83.2	66.5	55.4	41.6	33.3	27.7	22.2	16.6	3.82	2.55	1.91	1.53
	XC	60	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66
15	UC	70	1.32	98.0	78.4	65.3	49.0	39.2	32.7	26.1	19.6	4.50	3.00	2.25	1.80
	UC	80	1.41	105	83.8	69.8	52.3	41.9	34.9	27.9	20.9	4.81	3.21	2.40	1.92
	UC	20	1.06	78.7	63.0	52.5	39.4	31.5	26.2	21.0	15.7	3.61	2.41	1.81	1.45
	UC	30	1.30	96.5	77.2	64.4	48.3	38.6	32.2	25.7	19.3	4.43	2.96	2.22	1.77
	UC	40	1.50	111	89.1	74.3	55.7	44.6	37.1	29.7	22.3	5.12	3.41	2.56	2.05
	XC	50	1.68	125	99.8	83.2	62.4	49.9	41.6	33.3	24.9	5.73	3.82	2.86	2.29
20	UC	60	1.84	137	109	91.1	68.3	54.6	45.5	36.4	27.3	6.27	4.18	3.14	2.51
	UC	70	1.98	147	118	98.0	73.5	58.8	49.0	39.2	29.4	6.75	4.50	3.38	2.70
	UC	80	2.12	157	126	105	78.7	63.0	52.5	42.0	31.5	7.23	4.82	3.61	2.89
	UC	20	1.41	105	83.8	69.8	52.3	41.9	34.9	27.9	20.9	4.81	3.21	2.40	1.92
	UC	30	1.73	128	103	85.6	64.2	51.4	42.8	34.3	25.7	5.90	3.93	2.95	2.36
	UC	40	2.00	149	119	99.0	74.3	59.4	49.5	39.6	29.7	6.82	4.55	3.41	2.73
30	UC	50	2.24	166	133	111	83.2	66.5	55.4	44.4	33.3	7.64	5.09	3.82	3.06
	UC	60	2.45	182	146	121	91.0	72.8	60.6	48.5	36.4	8.35	5.57	4.18	3.34
	UC	70	2.65	197	157	131	98.4	78.7	65.6	52.5	39.4	9.04	6.02	4.52	3.61
	UC	80	2.83	210	168	140	105	84.1	70.0	56.0	42.0	9.65	6.43	4.83	3.86
	UC	20	2.12	157	126	105	78.7	63.0	52.5	42.0	31.5	7.23	4.82	3.61	2.89
	UC	30	2.60	193	154	129	96.5	77.2	64.4	51.5	38.6	8.87	5.91	4.43	3.55
40	UC	40	3.00	223	178	149	111	89.1	74.3	59.4	44.6	10.2	6.82	5.12	4.09
	UC	50	3.35	249	199	166	124	99.5	82.9	66.3	49.7	11.4	7.62	5.71	4.57
	UC	60	3.67	272	218	182	136	109	90.8	72.7	54.5	12.5	8.34	6.26	5.01
	UC	70	3.97	295	236	197	147	118	98.3	78.6	59.0	13.5	9.03	6.77	5.42
	UC	80	4.24	315	252	210	157	126	105	84.0	63.0	14.5	9.64	7.23	5.78
	UC	20	2.83	210	168	140	105	84.1	70.0	56.0	42.0	9.65	6.43	4.83	3.86
50	UC	30	3.46	257	206	171	128	103	85.6	68.5	51.4	11.8	7.87	5.90	4.72
	UC	40	4.00	297	238	198	149	119	99.0	79.2	59.4	13.6	9.09	6.82	5.46
	UC	50	4.47	332	266	221	166	133	111	88.5	66.4	15.2	10.2	7.62	6.10
	UC	60	4.90	364	291	243	182	146	121	97.0	72.8	16.7	11.1	8.35	6.68
	UC	70	5.29	393	314	262	196	157	131	105	78.4	18.0	12.0	9.02	7.22
	UC	80	5.66	420	336	280	210	168	140	112	84.1	19.3	12.9	9.65	7.72
60	UC	20	3.54	263	210	175	131	105	87.6	70.1	52.6	12.1	8.05	6.04	4.83
	UC	30	4.33	322	257	214	161	129	107	85.7	64.3	14.8	9.84	7.38	5.91
	UC	40	5.00	371	297	248	186	149	124	99.0	74.3	17.1	11.4	8.53	6.82
	UC	50	5.59	415	332	277	208	166	138	111	83.0	19.1	12.7	9.53	7.62
	UC	60	6.12	454	364	303	227	182	151	121	90.9	20.9	13.9	10.4	8.35
	UC	70	6.61	491	393	327	245	196	164	131	98.2	22.5	15.0	11.3	9.02
80	UC	80	7.07	525	420	350	262	210	175	140	105	24.1	16.1	12.1	9.64
	UC	20	4.24	315	252	210	157	126	105	84.0	63.0	14.5	9.64	7.23	5.78
	UC	30	5.20	386	309	257	193	154	129	103	77.2	17.7	11.8	8.87	7.09
	UC	40	6.00	446	356	297	223	178	149	119	89.1	20.5	13.6	10.2	8.18
	UC	50	6.71	498	399	332	249	199	166	133	99.6	22.9	15.3	11.4	9.15
	UC	60	7.35	546	437	364	273	218	182	146	109	25.1	16.7	12.5	10.0
80	UC	70	7.94	590	472	393	295	236	197	157	118	27.1	18.1	13.5	10.8
	UC	80	8.49	630	504	420	315	252	210	168	126	29.0	19.3	14.5	11.6

Droplet size based on ASABE S572.1 standard.




1. Straight flow design for superior resistance to plugging and creation of driftable droplets
2. Unitized spray tip design for easy single piece operation
3. Removable pre-orifice for easy cleaning



Floater Adapter for Hi-Flow Nozzles

Part Number	Description
9950-0001	Floater Adapter Kit for Hi-Flow Nozzles (3/4" Cam Lock to Bayonet)

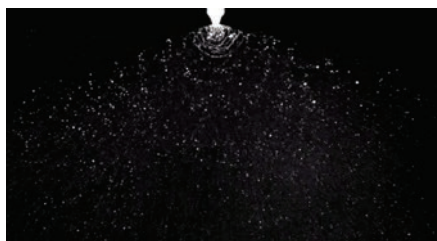

140° wide, large droplet spray pattern for industry leading coverage of liquid fertilizers.



Straight through design squeezes fluid flow to create the spray pattern versus deflecting fluid flow and creating un-needed spray drift.

Metric Units

Tip Size				Application Rate L/Ha - 50 cm Spacing							
Tip Size	Droplet Size	Pressure (BAR)	Flow Rate (LPM)	K/M/H							
				7	8	10	12	15	20	25	30
08	UC	1,5	2,26	387	339	271	226	181	136	108	90
	UC	2	2,61	447	392	313	261	209	157	125	104
	UC	2,5	2,92	501	438	350	292	234	175	140	117
	UC	3	3,20	549	480	384	320	256	192	154	128
	XC	4	3,70	634	555	444	370	296	222	178	148
	XC	5	4,13	708	620	496	413	330	248	198	165
10	XC	6	4,53	777	680	544	453	362	272	217	181
	UC	1,5	2,8	480	420	336	280	224	168	134	112
	UC	2	3,3	566	495	396	330	264	198	158	132
	UC	2,5	3,7	634	555	444	370	296	222	178	148
	UC	3	4,0	686	600	480	400	320	240	192	160
	XC	4	4,6	789	690	552	460	368	276	221	184
15	XC	5	5,2	891	780	624	520	416	312	250	208
	XC	6	5,7	977	855	684	570	456	342	274	228
	UC	1,5	4,2	720	630	504	420	336	252	202	168
	UC	2	4,9	840	735	588	490	392	294	235	196
	UC	2,5	5,5	943	825	660	550	440	330	264	220
	UC	3	6,0	1029	900	720	600	480	360	288	240
20	XC	4	6,9	1183	1035	828	690	552	414	331	276
	XC	5	7,7	1320	1155	924	770	616	462	370	308
	XC	6	8,5	1457	1275	1020	850	680	510	408	340
	UC	1,5	5,7	977	855	684	570	456	342	274	228
	UC	2	6,5	1114	975	780	650	520	390	312	260
	UC	2,5	7,3	1251	1095	876	730	584	438	350	292
30	UC	3	8,0	1371	1200	960	800	640	480	384	320
	XC	4	9,2	1577	1380	1104	920	736	552	442	368
	XC	5	10,3	1766	1545	1236	1030	824	618	494	412
	XC	6	11,3	1937	1695	1356	1130	904	678	542	452
	UC	1,5	8,5	1457	1275	1020	850	680	510	408	340
	UC	2	9,8	1680	1470	1176	980	784	588	470	392
40	UC	2,5	11,0	1886	1650	1320	1100	880	660	528	440
	UC	3	12,0	2057	1800	1440	1200	960	720	576	480
	XC	4	13,9	2383	2085	1668	1390	1112	834	667	556
	XC	5	15,5	2657	2325	1860	1550	1240	930	744	620
	XC	6	17,0	2914	2550	2040	1700	1360	1020	816	680
	UC	1,5	11,3	1937	1695	1356	1130	904	678	542	452
50	UC	2	13,1	2246	1965	1572	1310	1048	786	629	524
	UC	2,5	14,6	2503	2190	1752	1460	1168	876	701	584
	UC	3	16,0	2743	2400	1920	1600	1280	960	768	640
	XC	4	18,5	3171	2775	2220	1850	1480	1110	888	740
	XC	5	20,7	3549	3105	2484	2070	1656	1242	994	828
	XC	6	22,6	3874	3390	2712	2260	1808	1356	1085	904
60	UC	1,5	14,1	2417	2115	1692	1410	1128	846	677	564
	UC	2	16,3	2794	2445	1956	1630	1304	978	782	652
	UC	2,5	18,3	3137	2745	2196	1830	1464	1098	878	732
	UC	3	20,0	3429	3000	2400	2000	1600	1200	960	800
	XC	4	23,1	3960	3465	2772	2310	1848	1386	1109	924
	XC	5	25,8	4423	3870	3096	2580	2064	1548	1238	1032
60	XC	6	28,3	4851	4245	3396	2830	2264	1698	1358	1132
	UC	1,5	17,0	2914	2550	2040	1700	1360	1020	816	680
	UC	2	19,6	3360	2940	2352	1960	1568	1176	941	784
	UC	2,5	21,9	3754	3285	2628	2190	1752	1314	1051	876
	UC	3	24,0	4114	3600	2880	2400	1920	1440	1152	960
	XC	4	27,7	4749	4155	3324	2770	2216	1662	1330	1108
60	XC	5	31,0	5314	4650	3720	3100	2480	1860	1488	1240
	XC	6	33,9	5811	5085	4068	3390	2712	2034	1627	1356

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Fertilizer
Pattern	Tapered Flat Fan
Technology	Pre-Orifice
Material	Polycetal
Spray Angle	140°
Pressure Range	20-80 PSI (1.5-6 BAR)
Configuration	FastCap
Part Numbers	
FastCaps 140°	
HF140-08	
HF140-10	
HF140-15	
HF140-20	
HF140-30	
HF140-40	
HF140-50	
HF140-60	
Replacement Cap Gasket	
65-BS205	



Metric Units

Tip Size	Droplet Size	Spray Angle	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm Spacing KM/H							
					7	8	10	12	15	20	25	30
0,5	VC	80	1.0	0.23	39	34	27	23	18	14	11	9
	M		1.5	0.28	48	42	34	28	22	17	13	11
	F		2.0	0.32	55	48	39	32	26	19	15	13
	F		2.5	0.36	62	54	43	36	29	22	17	14
	F		3.0	0.39	68	59	47	39	32	24	19	16
0,75	C	95	4.0	0.46	78	68	55	46	36	27	22	18
	VC		1.0	0.34	59	51	41	34	27	21	16	14
	M		1.5	0.42	72	63	50	42	34	25	20	17
	M		2.0	0.48	83	73	58	48	39	29	23	19
	F		2.5	0.54	93	81	65	54	43	32	26	22
1,0	F	105	3.0	0.59	102	89	71	59	47	36	28	24
	F		4.0	0.68	117	103	82	68	55	41	33	27
	C		1.0	0.46	78	68	55	46	36	27	22	18
	M		1.5	0.56	96	84	67	56	45	34	27	22
	M		2.0	0.64	111	97	77	64	52	39	31	26
1,5	F	105	2.5	0.72	124	108	86	72	58	43	35	29
	F		3.0	0.79	135	118	95	79	63	47	38	32
	F		4.0	0.91	156	137	109	91	73	55	44	36
	C		1.0	0.68	117	103	82	68	55	41	33	27
	M		1.5	0.84	144	126	101	84	67	50	40	34
2,0	M	105	2.0	0.97	166	145	116	97	77	58	46	39
	M		2.5	1.08	185	162	130	108	86	65	52	43
	F		3.0	1.18	203	178	142	118	95	71	57	47
	F		4.0	1.37	234	205	164	137	109	82	66	55
	C		1.0	0.91	156	137	109	91	73	55	44	36
2,5	M	110	1.5	1.12	191	168	134	112	89	67	54	45
	M		2.0	1.29	221	193	155	129	103	77	62	52
	M		2.5	1.44	247	216	173	144	115	86	69	58
	F		3.0	1.58	271	237	190	158	126	95	76	63
	F		4.0	1.82	313	274	219	182	146	109	88	73
3,0	C	110	1.0	1.14	195	171	137	114	91	68	55	46
	M		1.5	1.40	239	209	168	140	112	84	67	56
	M		2.0	1.61	276	242	193	161	129	97	77	64
	F		2.5	1.80	309	270	216	180	144	108	86	72
	F		3.0	1.97	338	296	237	197	158	118	95	79
4,0	F	120	4.0	2.28	391	342	274	228	182	137	109	91
	C		1.0	1.37	234	205	164	137	109	82	66	55
	M		1.5	1.68	287	251	201	168	134	101	80	67
	M		2.0	1.93	332	290	232	193	155	116	93	77
	M		2.5	2.16	371	324	259	216	173	130	104	86
5,0	M	125	3.0	2.37	406	355	284	237	190	142	114	95
	M		4.0	2.74	469	410	328	274	219	164	131	109
	VC		1.0	1.82	313	274	219	182	146	109	88	73
	M		1.5	2.23	383	335	268	223	179	134	107	89
	M		2.0	2.58	442	387	309	258	206	155	124	103
7,5	M	145	2.5	2.88	494	432	346	288	231	173	138	115
	M		3.0	3.16	541	474	379	316	253	190	152	126
	M		4.0	3.65	625	547	438	365	292	219	175	146
	C		1.0	2.3	391	342	274	228	182	137	109	91
	M		1.5	2.8	479	419	335	279	223	168	134	112
10	M	160	2.0	3.2	553	484	387	322	258	193	155	129
	M		2.5	3.6	618	541	432	360	288	216	173	144
	M		3.0	3.9	677	592	474	395	316	237	190	158
	M		4.0	4.6	782	684	547	456	365	274	219	182
	C		1.0	3.4	586	513	410	342	274	205	164	137
15	M	145	1.5	4.2	718	628	503	419	335	251	201	168
	C		2.0	4.8	829	725	580	484	387	290	232	193
	C		2.5	5.4	927	811	649	541	432	324	259	216
	C		3.0	5.9	1015	888	711	592	474	355	284	237
	M		4.0	6.8	1172	1026	821	684	547	410	328	274
20	VC	140	1.0	4.6	782	684	547	456	365	274	219	182
	C		1.5	5.6	957	838	670	558	447	335	268	223
	C		2.0	6.4	1105	967	774	645	516	387	309	258
	C		2.5	7.2	1236	1081	865	721	577	432	346	288
	C		3.0	7.9	1354	1184	948	790	632	474	379	316
20	C	140	4.0	9.1	1563	1368	1094	912	729	547	438	365
	VC		1.0	6.8	1172	1026	821	684	547	410	328	274
	VC		1.5	8.4	1436	1256	1005	838	670	503	402	335
	VC		2.0	9.7	1658	1451	1160	967	774	580	464	387
	VC		2.5	10.8	1854	1622	1297	1081	865	649	519	432
20	VC	140	3.0	11.8	2030	1777	1421	1184	948	711	569	474
	VC		4.0	13.7	2345	2051	1641	1368	1094	821	656	547
	UC		1.0	9.1	1563	1368	1094	912	729	547	438	365
	UC		1.5	11.2	1914	1675	1340	1117	893	670	536	447
	XC		2.0	12.9	2210	1934	1547	1289	1032	774	619	516
20	XC	140	2.5	14.4	2471	2162	1730	1442	1153	865	692	577
	XC		3.0	15.8	2707	2369	1895	1579	1263	948	758	632
	XC		4.0	18.2	3126	2735	2188	1824	1459	1094	875	729

Please note: Also available are a range of Polijet nozzles. These are flood fan tips designed for knapsack sprayers to offer spray swath widths of between 0.5 and 2.0 metres. Reference part numbers 30AN0.6, 30AN1.2, 30AN1.8 & 30AN2.4 when ordering. Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Weeds & Fertilizer
Pattern	Flood
Technology	Deflection
Material	Polyacetal
Spray Angle	80°-160°
Pressure Range	10-60 PSI (1-3 BAR)
Configuration	Tip
Part Numbers	
Tips	Caps (25 Pack)
30DT0.5	CAP30-20
30DT0.75	CAP30-20
30DT1.0	CAP30-20
30DT1.5	CAP30-20
30DT2.0	CAP30-20
30DT2.5	CAP30-20
30DT3.0	CAP30-20
30DT4.0	CAP30-20
30DT5.0	CAP30-20
30DT7.5	CAP30-20
30DT10	CAP30-20
30DT15	CAP30-20
30DT20	CAP30-20



Ceramic APM 80°-160°



The Albuz® APM wide-angle flood fan tip creates a wide pattern at very low pressures while creating mainly medium and coarse droplets. It is well suited for mounting on machinery where a wide angle or a low spray height is desired and on sprayers using very low pressures, including manual sprayers. The ceramic orifice and deflector make the APM the longest-wearing flood tip.

- Sprays at very low pressures
- Medium to coarse spray is suited for a variety of applications
- Large round orifice resists plugging
- Wear-resistant Albuz® ceramic orifice and deflector

US Units

Tip Size	Droplet Size	Spray Angle @ 30 PSI	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ² 20 inch nozzle spacing			
					4	5	6	8	10	12	15	20	2	3	4	5
0.12	M	80	10	0.12	4.5	3.6	3.0	2.2	1.8	1.5	1.2	0.9	0.41	0.27	0.20	0.16
	M		20	0.17	6.3	5.0	4.2	3.2	2.5	2.1	1.7	1.3	0.58	0.39	0.29	0.23
	M		30	0.21	7.8	6.2	5.2	3.9	3.1	2.6	2.1	1.6	0.72	0.48	0.36	0.29
	M		40	0.24	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.82	0.55	0.41	0.33
	M		50	0.27	10.0	8.0	6.7	5.0	4.0	3.3	2.7	2.0	0.92	0.61	0.46	0.37
	M		60	0.29	10.8	8.6	7.2	5.4	4.3	3.6	2.9	2.2	0.99	0.66	0.49	0.40
0.2	M	110	10	0.20	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5	0.68	0.45	0.34	0.27
	M		20	0.28	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.95	0.64	0.48	0.38
	M		30	0.35	13.0	10.4	8.7	6.5	5.2	4.3	3.5	2.6	1.19	0.80	0.60	0.48
	M		40	0.40	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	1.36	0.91	0.68	0.55
	M		50	0.45	16.7	13.4	11.1	8.4	6.7	5.6	4.5	3.3	1.53	1.02	0.77	0.61
	M		60	0.49	18.2	14.6	12.1	9.1	7.3	6.1	4.9	3.6	1.67	1.11	0.84	0.67
0.3	C	125	10	0.30	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	1.02	0.68	0.51	0.41
	C		20	0.42	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	1.43	0.95	0.72	0.57
	M		30	0.52	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	1.77	1.18	0.89	0.71
	M		40	0.60	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	2.05	1.36	1.02	0.82
	M		50	0.67	24.9	19.9	16.6	12.4	9.9	8.3	6.6	5.0	2.28	1.52	1.14	0.91
	M		60	0.73	27.1	21.7	18.1	13.6	10.8	9.0	7.2	5.4	2.49	1.66	1.24	1.00
0.4	C	135	10	0.40	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	1.36	0.91	0.68	0.55
	C		20	0.57	21.2	16.9	14.1	10.6	8.5	7.1	5.6	4.2	1.94	1.30	0.97	0.78
	M		30	0.69	25.6	20.5	17.1	12.8	10.2	8.5	6.8	5.1	2.35	1.57	1.18	0.94
	M		40	0.80	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	2.73	1.82	1.36	1.09
	M		50	0.89	33.0	26.4	22.0	16.5	13.2	11.0	8.8	6.6	3.03	2.02	1.52	1.21
	M		60	0.98	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	3.34	2.23	1.67	1.34
0.5	C	140	10	0.50	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	1.71	1.14	0.85	0.68
	C		20	0.71	26.4	21.1	17.6	13.2	10.5	8.8	7.0	5.3	2.42	1.61	1.21	0.97
	M		30	0.87	32.3	25.8	21.5	16.1	12.9	10.8	8.6	6.5	2.97	1.98	1.48	1.19
	M		40	1.00	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	3.41	2.27	1.71	1.36
	M		50	1.12	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	3.82	2.55	1.91	1.53
	M		60	1.22	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	4.16	2.77	2.08	1.66
0.74	VC	160	10	0.70	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	2.39	1.59	1.19	0.95
	C		20	0.99	36.8	29.4	24.5	18.4	14.7	12.3	9.8	7.4	3.38	2.25	1.69	1.35
	C		30	1.21	44.9	35.9	29.9	22.5	18.0	15.0	12.0	9.0	4.13	2.75	2.06	1.65
	C		40	1.40	52.0	41.6	34.7	26.0	20.8	17.3	13.9	10.4	4.77	3.18	2.39	1.91
	C		50	1.57	58.3	46.6	38.9	29.1	23.3	19.4	15.5	11.7	5.35	3.57	2.68	2.14
	C		60	1.71	63.5	50.8	42.3	31.7	25.4	21.2	16.9	12.7	5.83	3.89	2.92	2.33
0.94	VC	160	10	0.91	33.8	27.0	22.5	16.9	13.5	11.3	9.0	6.8	3.10	2.07	1.55	1.24
	C		20	1.29	47.9	38.3	31.9	23.9	19.2	16.0	12.8	9.6	4.40	2.93	2.20	1.76
	C		30	1.58	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	5.39	3.59	2.69	2.16
	C		40	1.82	67.6	54.1	45.0	33.8	27.0	22.5	18.0	13.5	6.21	4.14	3.10	2.48
	C		50	2.03	75.4	60.3	50.2	37.7	30.1	25.1	20.1	15.1	6.92	4.61	3.46	2.77
	C		60	2.23	82.8	66.2	55.2	41.4	33.1	27.6	22.1	16.6	7.60	5.07	3.80	3.04

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Weeds & Fertilizer
Pattern	Flood
Technology	Deflection
Material	Ceramic
Spray Angle	80° - 160°
Pressure Range	10-60 PSI (1-4 BAR)
Configuration	Tips
Part Numbers	
Tips	Caps (25 Pack)
APM-YELLOW	CAP04-20
APM-ORANGE	CAP04-20
APM-RED	CAP04-20
APM-GREEN	CAP04-20
APM-LIGHTBLUE	CAP04-20
APM-GRAY	CAP04-20
APM-BLACK	CAP04-20

SprayIt App. and Online Calculator



The SprayIT Calculator is an easy-to-use tool that will help you find the right spray tip for your desired application. Simply answer a few questions about your specific application and we'll supply you the best tips for that application.

This tool is available on the Hypro website or as a mobile app available for both Apple and Android devices.

sprayit.hyprospraytips.com

Download the FREE Hypro SprayIT app
from the Apple or Android app store





ESI Six Stream




The ESI six stream tip is designed for applying liquid fertilizer into soil seeded crops. It creates six individual streams that distribute the fertilizer on the soil while getting less on the crop. The wear resistant metering orifice and unique low pressure distribution chamber keep the streams stable to reduce atomization and prevent leaf burn and scorching. Spacing and spray height is similar to 110° broadcast tips.

- Six streams distribute fertilizer more evenly than one single stream
- Wear-resistant orifice for long product life
- FastCap includes tip, cap and gasket

US Units

Tip Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ²			
			MPH								20 inch nozzle spacing			
			4	5	6	8	10	12	15	20	2	3	4	5
015	15	0.09	6.7	5.3	4.5	3.3	2.7	2.2	1.8	1.3	0.31	0.20	0.15	0.12
	20	0.11	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	0.38	0.25	0.19	0.15
	30	0.13	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.30	0.22	0.18
	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20
	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
02	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25
	15	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16
	20	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19
	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
025	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
	15	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20
	20	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25
	30	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
03	40	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34
	50	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	60	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42
	15	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25
	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29
04	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46
	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
	15	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
05	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
06	15	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42
	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68
	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76
08	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
	15	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57
	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71
	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
10	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91
	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00
	15	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
	20	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78
	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
15	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09
	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21
	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34
	15	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
	20	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97
20	30	0.87	64.6	51.7	43.1	32.3	25.8	21.5	17.2	12.9	2.97	1.98	1.48	1.19
	40	1.00	74.3	59.4	49.5	37.1	29.7	24.8	19.8	14.9	3.41	2.27	1.71	1.36
	50	1.12	83.2	66.5	55.4	41.6	33.3	27.7	22.2	16.6	3.82	2.55	1.91	1.53
	60	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66
	15	0.92	68.3	54.6	45.5	34.2	27.3	22.8	18.2	13.7	3.14	2.09	1.57	1.25
15	20	1.06	78.7	63.0	52.5	39.4	31.5	26.2	21.0	15.7	3.61	2.41	1.81	1.45
	30	1.30	96.5	77.2	64.4	48.3	38.6	32.2	25.7	19.3	4.43	2.96	2.22	1.77
	40	1.50	111	89.1	74.3	55.7	44.6	37.1	29.7	22.3	5.12	3.41	2.56	2.05
	50	1.68	125	99.8	83.2	62.4	49.9	41.6	33.3	24.9	5.73	3.82	2.86	2.29
	60	1.84	137	109	91.1	68.3	56.6	45.5	36.4	27.3	6.27	4.18	3.14	2.51
20	15	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66
	20	1.41	105	83.8	69.8	52.3	41.9	34.9	27.9	20.9	4.81	3.21	2.40	1.92
	30	1.73	128	103	85.6	64.2	51.4	42.8	34.3	25.7	5.90	3.93	2.95	2.36
	40	2.00	149	119	99.0	74.3	59.4	49.5	39.6	29.7	6.82	4.55	3.41	2.73
	50	2.24	166	133	111	83.2	66.5	55.4	44.4	33.3	7.64	5.09	3.82	3.06
	60	2.45	182	146	121	91.0	72.8	60.6	48.5	36.4	8.35	5.57	4.18	3.34



1. Single inlet; Six outlet design for uniform application
2. Pre-orifice; superior product life
3. Available in a FastCap option for easy installation of a streaming tip



110° wide pattern consisting of 6 equally spaced streams providing uniform deposition of liquid fertilizers. Each individual stream was engineered to hold stream integrity and not break apart to avoid unwanted fertilizer burn on post emerge applications.

Metric Units

Tip Size	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha -50 cm Spacing KM/H							
			7	8	10	12	15	20	25	30
015	1	0,35	60	53	42	35	28	21	17	14
	1,5	0,42	72	63	50	42	34	25	20	17
	2	0,49	84	74	59	49	39	29	24	20
	2,5	0,55	94	83	66	55	44	33	26	22
	3	0,60	103	90	72	60	48	36	29	24
02	4	0,69	118	104	83	69	55	41	33	28
	1	0,46	79	69	55	46	37	28	22	18
	1,5	0,57	98	86	68	57	46	34	27	23
	2	0,65	111	98	78	65	52	39	31	26
	2,5	0,73	125	110	88	73	58	44	35	29
025	3	0,80	137	120	96	80	64	48	38	32
	4	0,92	158	138	110	92	74	55	44	37
	1	0,58	99	87	70	58	46	35	28	23
	1,5	0,71	122	107	85	71	57	43	34	28
	2	0,82	141	123	98	82	66	49	39	33
03	2,5	0,91	156	137	109	91	73	55	44	36
	3	1,00	171	150	120	100	80	60	48	40
	4	1,15	197	173	138	115	92	69	55	46
	1	0,69	118	104	83	69	55	41	33	28
	1,5	0,85	146	128	102	85	68	51	41	34
04	2	0,98	168	147	118	98	78	59	47	39
	2,5	1,10	189	165	132	110	88	66	53	44
	3	1,20	206	180	144	120	96	72	58	48
	4	1,39	238	209	167	139	111	83	67	56
	1	0,92	158	138	110	92	74	55	44	37
05	1,5	1,13	194	170	136	113	90	68	54	45
	2	1,31	225	197	157	131	105	79	63	52
	2,5	1,46	250	219	175	146	117	88	70	58
	3	1,60	274	240	192	160	128	96	77	64
	4	1,85	317	278	222	185	148	111	89	74
06	1	1,15	197	173	138	115	92	69	55	46
	1,5	1,41	242	212	169	141	113	85	68	56
	2	1,63	279	245	196	163	130	98	78	65
	2,5	1,83	314	275	220	183	146	110	88	73
	3	2,00	343	300	240	200	160	120	96	80
08	4	2,31	396	347	277	231	185	139	111	92
	1	1,39	238	209	167	139	111	83	67	56
	1,5	1,70	291	255	204	170	136	102	82	68
	2	1,96	336	294	235	196	157	118	94	78
	2,5	2,19	375	329	263	219	175	131	105	88
10	3	2,40	411	360	288	240	192	144	115	96
	4	2,77	475	416	332	277	222	166	133	111
	1	1,85	317	278	222	185	148	111	89	74
	1,5	2,26	387	339	271	226	181	136	108	90
	2	2,61	447	392	313	261	209	157	125	104
15	2,5	2,92	501	438	350	292	234	175	140	117
	3	3,20	549	480	384	320	256	192	154	128
	4	3,70	634	555	444	370	296	222	178	148
	1	2,3	394	345	276	230	184	138	110	92
	1,5	2,8	480	420	336	280	224	168	134	112
20	2	3,3	566	495	396	330	264	198	158	132
	2,5	3,7	634	555	444	370	296	222	178	148
	3	4,0	686	600	480	400	320	240	192	160
	4	4,6	789	690	552	460	368	276	221	184
	1	3,5	600	525	420	350	280	210	168	140
	1,5	4,2	720	630	504	420	336	252	202	168
	2	4,9	840	735	588	490	392	294	235	196
	2,5	5,5	943	825	660	550	440	330	264	220
	3	6,0	1029	900	720	600	480	360	288	240
	4	6,9	1183	1035	828	690	552	414	331	276
	1	4,6	789	690	552	460	368	276	221	184
	1,5	5,7	977	855	684	570	456	342	274	228
	2	6,5	1114	975	780	650	520	390	312	260
	2,5	7,3	1251	1095	876	730	584	438	350	292
	3	8,0	1371	1200	960	800	640	480	384	320
	4	9,2	1577	1380	1104	920	736	552	442	368

Features		
Common Use	Fertilizer	
Pattern	Streams	
Technology	Pre-Orifice	
Material	Ceramic or Polyacetal	
Spray Angle	110° Equivalent	
Pressure Range	15-60 PSI (1-4 BAR)	
Configuration	Tip, FastCap	
Part Numbers		
Tips 110°	FastCaps 110°	FastCaps 110°
Ceramic Orifice	Ceramic Orifice	Polyacetal Orifice
ESI-110015	FC-ESI-110015*	FC-ESI-110015P
ESI-11002	FC-ESI-11002*	FC-ESI-11002P
ESI-110025	FC-ESI-110025*	-
ESI-11003	FC-ESI-11003*	FC-ESI-11003P
ESI-11004	FC-ESI-11004*	FC-ESI-11004P
ESI-11005	FC-ESI-11005*	FC-ESI-11005P
ESI-11006	FC-ESI-11006*	FC-ESI-11006P
-	FC-ESI-11008	-
-	FC-ESI-11010	-
-	FC-ESI-11015	-
-	-	FC-ESI-11020P
Replacement Cap Gasket		
22W11MF64		Flat seal (sizes 015-06)
65-BS205		O-ring (sizes 08-15)

* Uses flat sealing gasket.



Fanjet 0°



The 0-degree Fanjet regulates flow, then produces a straight stream pattern. Precision-molded in polyvinylidene fluoride (PVDF) for excellent resistance to acids and many agricultural chemicals.

- 0-degree nozzles provide a single jet of spray for streaming or injecting liquid fertilizer
- Precision-molded using chemically-resistant PVDF material
- Superior resistance to orifice wear compared to brass or stainless steel

US Units

Tip Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ²			
			MPH								20 inch nozzle spacing			
			4	5	6	8	10	12	15	20	2	3	4	5
02	15	0.12	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16
	20	0.14	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.48	0.32	0.24	0.19
	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
03	15	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25
	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29
	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46
	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
04	15	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
05	15	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42
	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68
	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76
	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
06	15	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57
	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71
	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91
	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00
07	15	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	20	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
	30	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
	40	0.70	52.0	41.6	34.7	26.0	20.8	17.3	13.9	10.4	2.39	1.59	1.19	0.95
	50	0.78	57.9	46.3	38.6	29.0	23.2	19.3	15.4	11.6	2.66	1.77	1.33	1.06
	60	0.86	63.9	51.1	42.6	31.9	25.5	21.3	17.0	12.8	2.93	1.96	1.47	1.17
10	15	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
	20	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97
	30	0.87	64.6	51.7	43.1	32.3	25.8	21.5	17.2	12.9	2.97	1.98	1.48	1.19
	40	1.00	74.3	59.4	49.5	37.1	29.7	24.8	19.8	14.9	3.41	2.27	1.71	1.36
	50	1.12	83.2	66.5	55.4	41.6	33.3	27.7	22.2	16.6	3.82	2.55	1.91	1.53
	60	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66
15	15	0.92	68.3	54.6	45.5	34.2	27.3	22.8	18.2	13.7	3.14	2.09	1.57	1.25
	20	1.06	78.7	63.0	52.5	39.4	31.5	26.2	21.0	15.7	3.61	2.41	1.81	1.45
	30	1.30	96.5	77.2	64.4	48.3	38.6	32.2	25.7	19.3	4.43	2.96	2.22	1.77
	40	1.50	111	89.1	74.3	55.7	44.6	37.1	29.7	22.3	5.12	3.41	2.56	2.05
	50	1.68	125	99.8	83.2	62.4	49.9	41.6	33.3	24.9	5.73	3.82	2.86	2.29
	60	1.84	137	109	91.1	68.3	54.6	45.5	36.4	27.3	6.27	4.18	3.14	2.51
20	15	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66
	20	1.41	105	83.8	69.8	52.3	41.9	34.9	27.9	20.9	4.81	3.21	2.40	1.92
	30	1.73	128	103	85.6	64.2	51.4	42.8	34.3	25.7	5.90	3.93	2.95	2.36
	40	2.00	149	119	99.0	74.3	59.4	49.5	39.6	29.7	6.82	4.55	3.41	2.73
	50	2.24	166	133	111	83.2	66.5	55.4	44.4	33.3	7.64	5.09	3.82	3.06
	60	2.45	182	146	121	91.0	72.8	60.6	48.5	36.4	8.35	5.57	4.18	3.34
30	15	1.84	137	109	91.1	68.3	54.6	45.5	36.4	27.3	6.27	4.18	3.14	2.51
	20	2.12	157	126	105	78.7	63.0	52.5	42.0	31.5	7.23	4.82	3.61	2.89
	30	2.60	193	154	129	96.5	77.2	64.4	51.5	38.6	8.87	5.91	4.43	3.55
	40	3.00	223	178	149	111	89.1	74.3	59.4	44.6	10.2	6.82	5.12	4.09
	50	3.35	249	199	166	124	99.5	82.9	66.3	49.7	11.4	7.62	5.71	4.57
	60	3.67	272	218	182	136	109	90.8	72.7	54.5	12.5	8.34	6.26	5.01



Metric Units

Tip Size	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm Spacing KM/H							
			7	8	10	12	15	20	25	30
02	1	0,46	79	69	55	46	37	28	22	18
	1,5	0,57	98	86	68	57	46	34	27	23
	2	0,65	111	98	78	65	52	39	31	26
	2,5	0,73	125	110	88	73	58	44	35	29
	3	0,80	137	120	96	80	64	48	38	32
03	4	0,92	158	138	110	92	74	55	44	37
	1	0,69	118	104	83	69	55	41	33	28
	1,5	0,85	146	128	102	85	68	51	41	34
	2	0,98	168	147	118	98	78	59	47	39
	2,5	1,10	189	165	132	110	88	66	53	44
04	3	1,20	206	180	144	120	96	72	58	48
	4	1,39	238	209	167	139	111	83	67	56
	1	0,92	158	138	110	92	74	55	44	37
	1,5	1,13	194	170	136	113	90	68	54	45
	2	1,31	225	197	157	131	105	79	63	52
05	2,5	1,46	250	219	175	146	117	88	70	58
	3	1,60	274	240	192	160	128	96	77	64
	4	1,85	317	278	222	185	148	111	89	74
	1	1,15	197	173	138	115	92	69	55	46
	1,5	1,41	242	212	169	141	113	85	68	56
06	2	1,63	279	245	196	163	130	98	78	65
	2,5	1,83	314	275	220	183	146	110	88	73
	3	2,00	343	300	240	200	160	120	96	80
	4	2,31	396	347	277	231	185	139	111	92
	1	1,39	238	209	167	139	111	83	67	56
07	1,5	1,70	291	255	204	170	136	102	82	68
	2	1,96	336	294	235	196	157	118	94	78
	2,5	2,19	375	329	263	219	175	131	105	88
	3	2,40	411	360	288	240	192	144	115	96
	4	2,77	475	416	332	277	222	166	133	111
10	1	1,62	278	243	194	162	130	97	78	65
	1,5	1,98	339	297	238	198	158	119	95	79
	2	2,29	393	344	275	229	183	137	110	92
	2,5	2,56	439	384	307	256	205	154	123	102
	3	2,80	480	420	336	280	224	168	134	112
15	4	3,23	554	485	388	323	258	194	155	129
	1	2,3	394	345	276	230	184	138	110	92
	1,5	2,8	480	420	336	280	224	168	134	112
	2	3,3	566	495	396	330	264	198	158	132
	2,5	3,7	634	555	444	370	296	222	178	148
20	3	4,0	686	600	480	400	320	240	192	160
	4	4,6	789	690	552	460	368	276	221	184
	1	3,5	600	525	420	350	280	210	168	140
	1,5	4,2	720	630	504	420	336	252	202	168
	2	4,9	840	735	588	490	392	294	235	196
30	2,5	5,5	943	825	660	550	440	330	264	220
	3	6,0	1029	900	720	600	480	360	288	240
	4	6,9	1183	1035	828	690	552	414	331	276
	1	4,6	789	690	552	460	368	276	221	184
	1,5	5,7	977	855	684	570	456	342	274	228
30	2	6,5	1114	975	780	650	520	390	312	260
	2,5	7,3	1251	1095	876	730	584	438	350	292
	3	8,0	1371	1200	960	800	640	480	384	320
	4	9,2	1577	1380	1104	920	736	552	442	368
	1	6,9	1183	1035	828	690	552	414	331	276
30	1,5	8,5	1457	1275	1020	850	680	510	408	340
	2	9,8	1680	1470	1176	980	784	588	470	392
	2,5	11,0	1886	1650	1320	1100	880	660	528	440
	3	12,0	2057	1800	1440	1200	960	720	576	480
	4	13,9	2383	2085	1668	1390	1112	834	667	556

Features	
Common Use	Fertilizer
Pattern	Stream
Technology	Round Orifice
Material	PVDF
Spray Angle	0°
Pressure Range	15-60 PSI [1-4 BAR]
Configuration	1/4" MNPT or BSP
Part Numbers	
NPT	BSP
90A2CM02E00	90B2CM02E00
90A2CM03E00	90B2CM03E00
90A2CM04E00	90B2CM04E00
90A2CM05E00	90B2CM05E00
90A2CM06E00	90B2CM06E00
90A2CM07E00	90B2CM07E00
90A2CM10E00	90B2CM10E00
90A2CM15E00	90B2CM15E00
90A2CM20E00	90B2CM20E00
90A2CM30E00	90B2CM30E00



Flow Regulating Disc DC



The Hypro Flow Regulating Disc – DC is commonly paired with push-to-connect products in liquid fertilizer systems onboard planting equipment.

- Regulates flow and produces a straight stream pattern
- Precision-molded in polyacetal for reliable performance
- Conveniently packaged in a quantity of ten

US Units

Disc	US Gallon/Min										
	PSI										
	10	15	20	25	30	35	40	60	80	100	150
10BG-30-DC-00	0	0	0	0	0	0	0	0	0	0	0
10BG-30-DC010	0.008	0.010	0.011	0.013	0.014	0.015	0.016	0.020	0.023	0.025	0.031
10BG-30-DC018	0.030	0.037	0.042	0.047	0.052	0.056	0.060	0.073	0.085	0.095	0.116
10BG-30-DC023	0.038	0.047	0.054	0.060	0.066	0.071	0.076	0.093	0.107	0.120	0.147
10BG-30-DC-01	0.057	0.070	0.081	0.090	0.099	0.107	0.114	0.140	0.161	0.180	0.221
10BG-30-DC-015	0.078	0.096	0.110	0.123	0.135	0.146	0.156	0.191	0.221	0.247	0.302
10BG-30-DC-02	0.105	0.129	0.148	0.166	0.182	0.196	0.210	0.257	0.297	0.332	0.407
10BG-30-DC-03	0.133	0.163	0.188	0.210	0.230	0.249	0.266	0.326	0.376	0.421	0.515
10BG-30-DC-035	0.175	0.214	0.247	0.277	0.303	0.327	0.350	0.429	0.495	0.553	0.678
10BG-30-DC-04	0.242	0.296	0.342	0.383	0.419	0.453	0.484	0.593	0.684	0.765	0.937
10BG-30-DC-05	0.392	0.480	0.554	0.620	0.679	0.733	0.784	0.960	1.11	1.24	1.52
10BG-30-DC-06	0.570	0.698	0.806	0.901	0.987	1.07	1.14	1.40	1.61	1.80	2.21
10BG-30-DC-07	0.760	0.931	1.07	1.20	1.32	1.42	1.52	1.86	2.15	2.40	2.94
10BG-30-DC-08	0.960	1.18	1.36	1.52	1.66	1.80	1.92	2.35	2.72	3.04	3.72
10BG-30-DC-10	1.55	1.90	2.19	2.45	2.68	2.90	3.10	3.80	4.38	4.90	6.00
10BG-30-DC-12	2.20	2.69	3.11	3.48	3.81	4.12	4.40	5.39	6.22	6.96	8.52

Features	
Common Use	Fertilizer
Pattern	Stream
Technology	Round Orifice
Material	Polyacetal
Spray Angle	0°
Pressure Range	10-150 PSI (1-10 BAR)
Configuration	Disc


Part Numbers	
Tips (10 per bag)	
10BG-30-DC-00- Blanking	
10BG-30-DC010	
10BG-30-DC018	
10BG-30-DC023	
10BG-30-DC-01	
10BG-30-DC-015	
10BG-30-DC-02	
10BG-30-DC-03	
10BG-30-DC-035	
10BG-30-DC-04	
10BG-30-DC-05	
10BG-30-DC-06	
10BG-30-DC-07	
10BG-30-DC-08	
10BG-30-DC-10	
10BG-30-DC-12	
Split Gasket (10 per bag)	
10BG-1700-0255	

Metric Units

Disc	Flow L/min									
	Pressure BAR									
	1	2	3	4	5	6	7	8	9	10
10BG-30-DC010	0,037	0,052	0,064	0,074	0,083	0,091	0,098	0,105	0,111	0,117
10BG-30-DC018	0,14	0,20	0,24	0,28	0,31	0,34	0,37	0,39	0,42	0,44
10BG-30-DC023	0,18	0,25	0,31	0,36	0,40	0,44	0,47	0,51	0,54	0,57
10BG-30-DC-01	0,26	0,37	0,45	0,52	0,58	0,64	0,69	0,73	0,78	0,82
10BG-30-DC015	0,36	0,51	0,62	0,72	0,80	0,88	0,95	1,01	1,07	1,13
10BG-30-DC-02	0,48	0,68	0,83	0,96	1,07	1,17	1,27	1,36	1,44	1,52
10BG-30-DC-03	0,61	0,86	1,05	1,21	1,36	1,48	1,60	1,71	1,82	1,92
10BG-30-DC-04	1,10	1,56	1,91	2,21	2,47	2,70	2,92	3,12	3,31	3,49
10BG-30-DC-05	1,79	2,53	3,10	3,58	4,00	4,38	4,74	5,06	5,37	5,66
10BG-30-DC-06	2,61	3,69	4,52	5,22	5,84	6,39	6,90	7,38	7,83	8,25
10BG-30-DC-07	3,49	4,94	6,05	6,99	7,81	8,56	9,24	9,88	10,48	11,05
10BG-30-DC-08	4,39	6,21	7,60	8,78	9,81	10,75	11,61	12,41	13,16	13,88
10BG-30-DC-10	7,35	10,39	12,73	14,70	16,43	18,00	19,45	20,79	22,05	23,24
10BG-30-DC-12	9,93	14,04	17,20	19,86	22,21	24,32	26,27	28,09	29,79	31,40



Flow Regulating Disc AMT 0°



The Albuz® ceramic disc regulates flow and produces a straight stream pattern.


- Precision-molded in ceramic
- Flexibility of flow rate is achieved through changing disc orientation

US Units

Disc	US Gallon/Min													
	10	15	20	25	30	PSI 35	40	60	80	100	150	200	300	725
AMT-15007 (n)	0.063	0.077	0.088	0.099	0.108	0.117	0.125	0.153	0.177	0.198	0.242	0.280	0.342	0.532
AMT-15007 (w)	0.064	0.078	0.091	0.101	0.111	0.120	0.128	0.157	0.181	0.202	0.248	0.286	0.351	0.545
AMT-15008 (n)	0.066	0.080	0.093	0.104	0.113	0.123	0.131	0.160	0.185	0.207	0.254	0.293	0.359	0.558
AMT-15008 (w)	0.083	0.101	0.117	0.130	0.143	0.154	0.165	0.202	0.233	0.261	0.320	0.369	0.452	0.702
AMT-15010 (n)	0.099	0.121	0.140	0.157	0.171	0.185	0.198	0.242	0.280	0.313	0.383	0.443	0.542	0.843
AMT-15010 (w)	0.139	0.170	0.197	0.220	0.241	0.260	0.278	0.340	0.393	0.440	0.538	0.622	0.761	1.18
AMT-15012 (n)	0.144	0.176	0.203	0.227	0.249	0.268	0.287	0.352	0.406	0.454	0.556	0.642	0.786	1.22
AMT-15012 (w)	0.174	0.213	0.246	0.275	0.301	0.326	0.348	0.426	0.492	0.550	0.674	0.778	0.953	1.48
AMT-15015 (n)	0.217	0.265	0.306	0.342	0.375	0.405	0.433	0.530	0.612	0.685	0.839	0.968	1.19	1.84
AMT-15015 (w)	0.287	0.351	0.405	0.453	0.496	0.536	0.573	0.702	0.810	0.906	1.11	1.28	1.57	2.44
AMT-15018 (n)	0.302	0.370	0.427	0.478	0.523	0.565	0.604	0.740	0.854	0.955	1.17	1.35	1.65	2.57
AMT-15020 (n)	0.375	0.459	0.530	0.593	0.650	0.702	0.750	0.919	1.06	1.19	1.45	1.68	2.05	3.19
AMT-15018 (w)	0.388	0.475	0.548	0.613	0.671	0.725	0.775	0.949	1.10	1.23	1.50	1.73	2.12	3.30
AMT-15020 (w)	0.472	0.577	0.667	0.746	0.817	0.882	0.943	1.15	1.33	1.49	1.83	2.11	2.58	4.01
AMT-15023 (n)	0.485	0.594	0.686	0.767	0.840	0.907	0.970	1.19	1.37	1.53	1.88	2.17	2.66	4.13
AMT-15023 (w)	0.605	0.741	0.856	0.957	1.05	1.13	1.21	1.48	1.71	1.91	2.34	2.71	3.31	5.15

Features	
Common Use	Fertilizer
Pattern	Stream
Technology	Round Orifice
Material	Ceramic
Spray Angle	0°
Pressure Range	10-725 PSI (1-50 BAR)
Configuration	Disc
Part Numbers	
Tips	
AMT-15007	
AMT-15008	
AMT-15010	
AMT-15012	
AMT-15015	
AMT-15018	
AMT-15020	
AMT-15023	

w - Numbers can be read on face of disc when installed in cap
n - Numbers on disc cannot be read when installed in cap
Photos above show the disc exit side.



Hollow Cone Spray Tips - SwirlTip Disc & Cores 25°-110°



Disc



Core

The Hypro SwirlTip disc and core hollow-cone spray tips produce finely atomized droplets.

- Hollow cone pattern in a variety of spray pattern widths
- Discs conveniently packaged in a quantity of ten

US Units

Disc	Core	Spray Angle at 40 PSI	Color Disc/Core	US Gallon/Min					PSI			
				10	20	30	40	60	80	100	150	
10BG-30-DC-01	30-CR-13	50	Gray/Red	-	-	0.06	0.07	0.08	0.09	0.10	0.13	
10BG-30-DC-015	30-CR-13	55	Black/Red	-	-	0.06	0.07	0.09	0.10	0.11	0.14	
10BG-30-DC-02	30-CR-13	65	Brown/Red	-	0.06	0.07	0.08	0.10	0.12	0.13	0.16	
10BG-30-DC-03	30-CR-13	70	Orange/Red	-	0.06	0.08	0.09	0.11	0.12	0.14	0.17	
10BG-30-DC-04	30-CR-13	80	Red/Red	0.06	0.08	0.10	0.12	0.14	0.17	0.19	0.23	
10BG-30-DC-01	30-CR-23	45	Gray/LightBlue	-	-	0.06	0.07	0.09	0.10	0.11	0.14	
10BG-30-DC-015	30-CR-23	50	Black/LightBlue	-	-	0.07	0.09	0.10	0.12	0.13	0.16	
10BG-30-DC-02	30-CR-23	70	Brown/LightBlue	-	0.08	0.09	0.11	0.13	0.15	0.17	0.21	
10BG-30-DC-03	30-CR-23	70	Orange/LightBlue	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.22	
10BG-30-DC-04	30-CR-23	80	Red/LightBlue	0.08	0.11	0.13	0.15	0.19	0.22	0.24	0.30	
10BG-30-DC-05	30-CR-23	90	Blue/LightBlue	0.09	0.13	0.16	0.18	0.22	0.25	0.28	0.35	
10BG-30-DC-06	30-CR-23	90	Yellow/LightBlue	0.10	0.15	0.18	0.21	0.25	0.29	0.33	0.40	
10BG-30-DC-01	30-CR-25	25	Gray/Yellow	-	-	0.09	0.10	0.12	0.14	0.16	0.19	
10BG-30-DC-015	30-CR-25	40	Black/Yellow	-	-	0.11	0.13	0.16	0.19	0.21	0.26	
10BG-30-DC-02	30-CR-25	50	Brown/Yellow	-	0.11	0.13	0.16	0.19	0.22	0.25	0.30	
10BG-30-DC-03	30-CR-25	60	Orange/Yellow	0.09	0.13	0.16	0.19	0.23	0.27	0.30	0.36	
10BG-30-DC-04	30-CR-25	75	Red/Yellow	0.14	0.19	0.24	0.28	0.34	0.39	0.43	0.53	
10BG-30-DC-05	30-CR-25	80	Blue/Yellow	0.18	0.25	0.30	0.35	0.43	0.49	0.55	0.68	
10BG-30-DC-06	30-CR-25	85	Yellow/Yellow	0.23	0.32	0.39	0.45	0.55	0.64	0.71	0.87	
10BG-30-DC-07	30-CR-25	90	Green/Yellow	0.25	0.35	0.43	0.50	0.61	0.71	0.79	0.97	
10BG-30-DC-08	30-CR-25	95	White/Yellow	0.30	0.42	0.52	0.60	0.73	0.85	0.95	1.16	
10BG-30-DC-10	30-CR-25	100	LimeGreen/Yellow	0.38	0.53	0.65	0.75	0.92	1.06	1.19	1.45	
10BG-30-DC-12	30-CR-25	110	RoyalBlue/Yellow	0.46	0.65	0.80	0.93	1.13	1.31	1.46	1.79	
10BG-30-DC-01	30-CR-45	25	Gray/Green	-	-	-	0.12	0.15	0.17	0.19	0.23	
10BG-30-DC-015	30-CR-45	35	Black/Green	-	-	0.14	0.16	0.20	0.23	0.25	0.31	
10BG-30-DC-02	30-CR-45	45	Brown/Green	-	0.14	0.17	0.20	0.24	0.28	0.32	0.39	
10BG-30-DC-03	30-CR-45	55	Orange/Green	-	0.16	0.20	0.23	0.28	0.32	0.36	0.44	
10BG-30-DC-04	30-CR-45	70	Red/Green	0.18	0.25	0.30	0.35	0.43	0.49	0.55	0.68	
10BG-30-DC-05	30-CR-45	75	Blue/Green	0.23	0.32	0.39	0.45	0.55	0.64	0.71	0.87	
10BG-30-DC-06	30-CR-45	80	Yellow/Green	0.29	0.41	0.50	0.58	0.70	0.81	0.91	1.11	
10BG-30-DC-07	30-CR-45	85	Green/Green	0.34	0.48	0.58	0.68	0.83	0.95	1.07	1.31	
10BG-30-DC-08	30-CR-45	90	White/Green	0.41	0.58	0.71	0.83	1.01	1.17	1.30	1.60	
10BG-30-DC-10	30-CR-45	95	LimeGreen/Green	0.55	0.78	0.95	1.10	1.35	1.56	1.74	2.13	
10BG-30-DC-12	30-CR-45	100	RoyalBlue/Green	0.67	0.95	1.16	1.34	1.64	1.90	2.12	2.60	

DC/CR Disc Core

	40 PSI	50 PSI	60 PSI	70 PSI	80 PSI	90 PSI	100 PSI	125 PSI	150 PSI
10BG-30-DC-01/30-CR-23	F	F	VF	VF	VF	VF	VF	VF	VF
10BG-30-DC-015/30-CR-23	F	F	VF	VF	VF	VF	VF	VF	VF
10BG-30-DC-02/30-CR-23	F	F	F	VF	VF	VF	VF	VF	VF
10BG-30-DC-03/30-CR-23	F	F	F	F	VF	VF	VF	VF	VF
10BG-30-DC-04/30-CR-23	F	F	F	F	F	F	VF	VF	VF
10BG-30-DC-05/30-CR-23	F	F	F	F	F	F	F	VF	VF
10BG-30-DC-06/30-CR-23	M	F	F	F	F	F	F	F	VF
10BG-30-DC-01/30-CR-25	F	F	F	VF	VF	VF	VF	VF	VF
10BG-30-DC-015/30-CR-25	F	F	F	F	VF	VF	VF	VF	VF
10BG-30-DC-02/30-CR-25	F	F	F	F	VF	VF	VF	VF	VF
10BG-30-DC-03/30-CR-25	F	F	F	F	F	VF	VF	VF	VF
10BG-30-DC-04/30-CR-25	M	F	F	F	F	F	F	VF	VF
10BG-30-DC-05/30-CR-25	M	M	M	F	F	F	F	VF	VF
10BG-30-DC-06/30-CR-25	M	M	M	M	M	M	F	F	F
10BG-30-DC-07/30-CR-25	M	M	M	M	M	M	M	F	F
10BG-30-DC-08/30-CR-25	C	C	C	C	M	M	M	M	M
10BG-30-DC-10/30-CR-25	C	C	C	C	C	M	M	M	M
10BG-30-DC-01/30-CR-45	F	F	F	VF	VF	VF	VF	VF	VF
10BG-30-DC-015/30-CR-45	M	F	F	F	VF	VF	VF	VF	VF
10BG-30-DC-02/30-CR-45	M	M	F	F	F	VF	VF	VF	VF
10BG-30-DC-03/30-CR-45	M	M	M	F	F	F	VF	VF	VF
10BG-30-DC-04/30-CR-45	M	M	M	M	F	F	F	VF	VF
10BG-30-DC-05/30-CR-45	M	M	M	M	M	F	F	F	VF
10BG-30-DC-06/30-CR-45	C	M	M	M	M	M	M	F	F
10BG-30-DC-07/30-CR-45	C	C	M	M	M	M	M	M	F
10BG-30-DC-08/30-CR-45	C	C	C	M	M	M	M	M	M

Droplet size based on ASABE S572.1 standard.

Metric Units

Disc	Core	Spray Angle at 2,75 BAR	Color Disc/Core	Flow L/min Pressure BAR							
				1	2	3	4	5	6	8	10
10BG-30-DC-01	30-CR-13	50	Gray/Red	0,16	0,22	0,27	0,31	0,35	0,38	0,44	0,49
10BG-30-DC-015	30-CR-13	55	Black/Red	0,17	0,24	0,29	0,33	0,37	0,41	0,47	0,53
10BG-30-DC-02	30-CR-13	65	Brown/Red	0,18	0,26	0,32	0,37	0,41	0,45	0,52	0,58
10BG-30-DC-03	30-CR-13	70	Orange/Red	0,21	0,29	0,36	0,42	0,46	0,51	0,59	0,66
10BG-30-DC-04	30-CR-13	80	Red/Red	0,27	0,38	0,47	0,54	0,61	0,66	0,77	0,86
10BG-30-DC-01	30-CR-23	45	Gray/LightBlue	0,16	0,23	0,28	0,32	0,36	0,40	0,46	0,51
10BG-30-DC-015	30-CR-23	50	Black/LightBlue	0,21	0,29	0,36	0,42	0,46	0,51	0,59	0,66
10BG-30-DC-02	30-CR-23	70	Brown/LightBlue	0,23	0,32	0,39	0,45	0,50	0,55	0,64	0,71
10BG-30-DC-03	30-CR-23	70	Orange/LightBlue	0,27	0,38	0,47	0,54	0,61	0,66	0,77	0,86
10BG-30-DC-04	30-CR-23	80	Red/LightBlue	0,34	0,48	0,59	0,68	0,76	0,83	0,96	1,08
10BG-30-DC-05	30-CR-23	90	Blue/LightBlue	0,41	0,58	0,71	0,82	0,92	1,00	1,16	1,30
10BG-30-DC-06	30-CR-23	90	Yellow/LightBlue	0,48	0,68	0,83	0,96	1,07	1,17	1,36	1,52
10BG-30-DC-01	30-CR-25	25	Gray/Yellow	0,23	0,33	0,40	0,46	0,52	0,57	0,65	0,73
10BG-30-DC-015	30-CR-25	40	Black/Yellow	0,30	0,42	0,52	0,60	0,67	0,74	0,85	0,95
10BG-30-DC-02	30-CR-25	50	Brown/Yellow	0,36	0,51	0,63	0,73	0,81	0,89	1,03	1,15
10BG-30-DC-03	30-CR-25	60	Orange/Yellow	0,43	0,61	0,75	0,87	0,97	1,06	1,22	1,37
10BG-30-DC-04	30-CR-25	75	Red/Yellow	0,66	0,93	1,14	1,32	1,47	1,61	1,86	2,08
10BG-30-DC-05	30-CR-25	80	Blue/Yellow	0,80	1,13	1,38	1,59	1,78	1,95	2,25	2,52
10BG-30-DC-06	30-CR-25	85	Yellow/Yellow	1,00	1,42	1,74	2,01	2,25	2,46	2,84	3,18
10BG-30-DC-07	30-CR-25	90	Green/Yellow	1,18	1,67	2,05	2,37	2,65	2,90	3,35	3,74
10BG-30-DC-08	30-CR-25	95	White/Yellow	1,39	1,97	2,41	2,78	3,11	3,41	3,94	4,40
10BG-30-DC-10	30-CR-25	100	LimeGreen/Yellow	1,73	2,45	3,00	3,66	3,87	4,24	4,90	5,48
10BG-30-DC-12	30-CR-25	110	RoyalBlue/Yellow	2,12	3,00	3,67	4,24	4,74	5,19	5,99	6,70
10BG-30-DC-01	30-CR-45	25	Gray/Green	0,28	0,39	0,48	0,55	0,62	0,68	0,78	0,88
10BG-30-DC-015	30-CR-45	35	Black/Green	0,37	0,52	0,64	0,74	0,83	0,91	1,05	1,17
10BG-30-DC-02	30-CR-45	45	Brown/Green	0,46	0,65	0,80	0,92	1,03	1,13	1,31	1,46
10BG-30-DC-03	30-CR-45	55	Orange/Green	0,53	0,74	0,91	1,05	1,17	1,29	1,49	1,66
10BG-30-DC-04	30-CR-45	70	Red/Green	0,82	1,16	1,42	1,64	1,83	2,01	2,32	2,59
10BG-30-DC-05	30-CR-45	75	Blue/Green	1,03	1,45	1,78	2,06	2,30	2,52	2,91	3,25
10BG-30-DC-06	30-CR-45	80	Yellow/Green	1,32	1,87	2,29	2,64	2,96	3,24	3,74	4,18
10BG-30-DC-07	30-CR-45	85	Green/Green	1,55	2,19	2,68	3,09	3,46	3,79	4,38	4,89
10BG-30-DC-08	30-CR-45	90	White/Green	1,92	2,71	3,32	3,83	4,29	4,70	5,42	6,06
10BG-30-DC-10	30-CR-45	95	LimeGreen/Green	2,54	3,59	4,40	5,08	5,68	6,22	7,19	8,03
10BG-30-DC-12	30-CR-45	100	RoyalBlue/Green	3,10	4,38	5,37	6,20	6,93	7,59	8,77	9,80

Features	
Common Use	Plant Health
Pattern	Hollow Cone
Technology	Swirl
Material	Polyacetal
Spray Angle	25° - 110°
Pressure Range	10-150 PSI (1-10 BAR)
Configuration	Tip
Part Numbers	
Discs	Cores
10BG-30-DC-01	30-CR-13
10BG-30-DC-015	30-CR-23
10BG-30-DC-02	30-CR-25
10BG-30-DC-03	30-CR-45
10BG-30-DC-04	-
10BG-30-DC-05	-
10BG-30-DC-06	-
10BG-30-DC-07	-
10BG-30-DC-08	-
10BG-30-DC-10	-
10BG-30-DC-12	-

DC/CR Disc Core

	2.5 BAR	3 BAR	3.5 BAR	4 BAR	4.5 BAR	5 BAR	5.5 BAR	6 BAR
10BG-30-DC-01/30-CR-23	F	F	F	VF	VF	VF	VF	VF
10BG-30-DC-02/30-CR-23	F	F	F	F	VF	VF	VF	VF
10BG-30-DC-03/30-CR-23	F	F	F	F	F	F	VF	VF
10BG-30-DC-04/30-CR-23	F	F	F	F	F	F	F	F
10BG-30-DC-05/30-CR-23	M	F	F	F	F	F	F	F
10BG-30-DC-06/30-CR-23	M	M	F	F	F	F	F	F
10BG-30-DC-01/30-CR-25	F	F	F	F	VF	VF	VF	VF
10BG-30-DC-015/30-CR-25	F	F	F	F	F	VF	VF	VF
10BG-30-DC-02/30-CR-25	F	F	F	F	F	F	VF	VF
10BG-30-DC-03/30-CR-25	M	F	F	F	F	F	F	VF
10BG-30-DC-04/30-CR-25	M	M	F	F	F	F	F	F
10BG-30-DC-05/30-CR-25	M	M	M	M	M	M	F	F
10BG-30-DC-06/30-CR-25	M	M	M	M	M	M	M	M
10BG-30-DC-07/30-CR-25	M	M	M	M	M	M	M	M
10BG-30-DC-08/30-CR-25	C	C	C	C	C	C	M	M
10BG-30-DC-10/30-CR-25	C	C	C	C	C	C	C	M
10BG-30-DC-01/30-CR-45	M	F	F	F	F	VF	VF	VF
10BG-30-DC-015/30-CR-45	M	M	F	F	F	F	VF	VF
10BG-30-DC-02/30-CR-45	M	M	M	F	F	F	F	VF
10BG-30-DC-03/30-CR-45	M	M	M	M	F	F	F	F
10BG-30-DC-04/30-CR-45	M	M	M	M	M	M	M	F
10BG-30-DC-05/30-CR-45	M	M	M	M	M	M	M	M
10BG-30-DC-06/30-CR-45	C	M	M	M	M	M	M	F
10BG-30-DC-07/30-CR-45	C	C	C	M	M	M	M	M
10BG-30-DC-08/30-CR-45	C	C	C	C	C	M	M	M

Droplet size based on ASABE S572.1 standard.



Hollow Cone Spray Tips - Ceramic Disc & Cores 13° - 93°



Albuz® ceramic discs and cores are the longest lasting disc-core tips, making them ideal for abrasive agricultural and horticultural sprays. DCC/CRC tips will outlast stainless steel disc-core tips by up to 10 times and perform superbly at high pressures, common on many air-blast and directed sprayers.

US Units

DISC	Hollow Cone CORE	Flow Rate GPM at Pressure, PSI										Spray Angle Degrees Pressure, PSI		
		10	20	30	40	60	80	100	150	200	300	20	40	80
DCC-01	CRC-13	-	-	0.059	0.066	0.078	0.088	0.097	0.115	0.128	0.152	-	51	62
DCC-02	CRC-13	-	0.064	0.075	0.08	0.10	0.11	0.12	0.14	0.16	0.18	49	67	72
DCC-03	CRC-13	-	0.071	0.08	0.09	0.11	0.12	0.13	0.16	0.18	0.20	53	70	75
DCC-04	CRC-13	0.07	0.09	0.11	0.12	0.14	0.16	0.17	0.20	0.23	0.27	69	79	83
DCC-01	CRC-23	-	-	0.064	0.072	0.080	0.096	0.107	0.124	0.139	0.164	-	47	58
DCC-02	CRC-23	-	0.078	0.092	0.10	0.13	0.14	0.16	0.19	0.21	0.25	51	63	70
DCC-03	CRC-23	0.065	0.087	0.10	0.12	0.14	0.16	0.18	0.21	0.24	0.28	58	69	75
DCC-04	CRC-23	0.082	0.113	0.14	0.15	0.19	0.21	0.23	0.28	0.32	0.38	68	82	87
DCC-05	CRC-23	0.095	0.13	0.16	0.18	0.22	0.25	0.28	0.34	0.38	0.46	79	89	94
DCC-06	CRC-23	0.112	0.15	0.19	0.21	0.26	0.29	0.32	0.39	0.45	0.54	84	93	98
DCC-01	CRC-25	-	-	0.088	0.101	0.122	0.138	0.156	0.185	0.210	0.255	-	27	43
DCC-02	CRC-25	-	0.12	0.14	0.16	0.19	0.22	0.25	0.29	0.34	0.41	39	51	58
DCC-03	CRC-25	0.10	0.14	0.17	0.19	0.23	0.26	0.29	0.35	0.40	0.48	52	61	67
DCC-04	CRC-25	0.15	0.21	0.25	0.29	0.35	0.40	0.45	0.54	0.62	0.75	67	74	80
DCC-05	CRC-25	0.18	0.25	0.30	0.35	0.42	0.48	0.54	0.65	0.75	0.90	73	79	84
DCC-06	CRC-25	0.23	0.32	0.39	0.44	0.54	0.62	0.70	0.85	0.97	1.19	79	85	89
DCC-07	CRC-25	0.26	0.37	0.45	0.52	0.63	0.73	0.81	0.98	1.18	1.37	85	91	93
DCC-01	CRC-45	-	-	-	0.125	0.148	0.170	0.190	0.225	0.257	0.310	-	22	34
DCC-02	CRC-45	-	0.14	0.18	0.20	0.25	0.28	0.32	0.38	0.44	0.53	32	46	55
DCC-03	CRC-45	-	0.17	0.20	0.23	0.28	0.33	0.36	0.44	0.51	0.62	40	53	60
DCC-04	CRC-45	0.18	0.25	0.31	0.36	0.43	0.50	0.56	0.68	0.78	0.95	62	69	72
DCC-05	CRC-45	0.23	0.32	0.39	0.45	0.55	0.64	0.71	0.86	0.99	1.22	67	73	76
DCC-06	CRC-45	0.29	0.41	0.50	0.58	0.72	0.83	0.93	1.15	1.33	1.64	73	79	81
DCC-07	CRC-45	0.33	0.48	0.59	0.68	0.84	0.97	1.11	1.14	1.57	1.94	81	86	87
DCC-01	CRC-46	-	-	-	0.145	0.178	0.205	0.23	0.28	0.32	0.39	-	13	15
DCC-02	CRC-46	-	-	0.24	0.27	0.33	0.37	0.42	0.50	0.57	0.68	-	18	21
DCC-03	CRC-46	-	0.23	0.28	0.32	0.39	0.45	0.51	0.61	0.70	0.86	14	20	24
DCC-04	CRC-46	0.28	0.39	0.48	0.56	0.68	0.78	0.88	1.07	1.23	1.52	23	29	33
DCC-05	CRC-46	0.38	0.54	0.66	0.77	0.94	1.10	1.25	1.50	1.73	2.13	33	39	42
DCC-06	CRC-46	0.55	0.78	0.95	1.10	1.35	1.58	1.73	2.16	2.50	3.06	42	48	50
DCC-07	CRC-46	-	0.98	1.22	1.39	1.72	1.97	2.22	2.73	3.15	3.85	48	53	56

Features		
Common Use	Plant Health	
Pattern	Hollow Cone	
Technology	Swirl	
Material	Ceramic	
Spray Angle	13°-93°	
Pressure Range	10-300 PSI [1-20 BAR]	
Configuration	Tip	
Part Numbers		
Discs	Cores	Caps (25 Pack)
DCC-01	CRC-13	CAP05-20
DCC-02	CRC-23	CAP05-20
DCC-03	CRC-45	CAP05-20
DCC-04	CRC-46	CAP05-20
DCC-05	-	CAP05-20
DCC-06	-	CAP05-20
DCC-07	-	CAP05-20



Hollow Cone Spray Tips - HCX 80°



The Hypro Hollow-Cone spray tips are excellent for fungicide and insecticide application. The HCX produces finely atomized droplets in a hollow-cone, 80-degree pattern.

- Precision-molded in polyacetal for durable product life
- Wide operating pressure

US Units

Spray Tip	Flow Rate, GPM at Pressure, PSI											
	40	50	60	70	80	90	100	110	120	130	140	150
30HCX2	0.030	0.034	0.037	0.040	0.042	0.045	0.047	0.050	0.052	0.054	0.056	0.058
30HCX3	0.050	0.056	0.061	0.066	0.071	0.075	0.079	0.083	0.087	0.090	0.094	0.097
30HCX4	0.070	0.078	0.086	0.093	0.099	0.105	0.111	0.116	0.121	0.126	0.131	0.136
30HCX6	0.102	0.114	0.125	0.135	0.144	0.153	0.161	0.169	0.177	0.184	0.191	0.198
30HCX8	0.133	0.149	0.163	0.176	0.188	0.200	0.210	0.221	0.230	0.240	0.249	0.258
30HCX9	0.148	0.165	0.181	0.196	0.209	0.222	0.234	0.245	0.256	0.267	0.277	0.287
30HCX10	0.164	0.183	0.201	0.217	0.232	0.246	0.259	0.272	0.284	0.296	0.307	0.318
30HCX12	0.203	0.227	0.249	0.269	0.287	0.305	0.321	0.337	0.352	0.366	0.380	0.393
30HCX18	0.300	0.335	0.367	0.397	0.424	0.450	0.474	0.497	0.520	0.541	0.561	0.581

HCX80° - Hollow Cone

	40 PSI	50 PSI	60 PSI	70 PSI	80 PSI	90 PSI	100 PSI	125 PSI	150 PSI
30HCX2	VF	VF	VF	VF	VF	VF	VF	VF	VF
30HCX3	VF	VF	VF	VF	VF	VF	VF	VF	VF
30HCX4	F	F	VF	VF	VF	VF	VF	VF	VF
30HCX6	F	F	VF	VF	VF	VF	VF	VF	VF
30HCX8	F	F	VF	VF	VF	VF	VF	VF	VF
30HCX9	F	F	VF	VF	VF	VF	VF	VF	VF
30HCX10	F	F	F	VF	VF	VF	VF	VF	VF
30HCX12	F	F	F	F	VF	VF	VF	VF	VF
30HCX18	F	F	F	F	F	F	VF	VF	VF

Droplet size based on ASABE S572.1 standard.

Metric Units


Spray Tip	Flow L/min Pressure BAR											
	3	3,5	4	4,5	5	5,5	6	6,5	7	8	9	10
30HCX2	0,132	0,143	0,152	0,162	0,170	0,179	0,187	0,194	0,202	0,216	0,229	0,241
30HCX3	0,199	0,215	0,230	0,244	0,257	0,269	0,281	0,293	0,304	0,325	0,345	0,363
30HCX4	0,265	0,286	0,306	0,325	0,342	0,359	0,375	0,390	0,405	0,433	0,459	0,484
30HCX6	0,397	0,429	0,458	0,486	0,513	0,538	0,561	0,584	0,606	0,648	0,688	0,725
30HCX8	0,530	0,572	0,612	0,649	0,684	0,718	0,750	0,780	0,810	0,865	0,918	0,968
30HCX9	0,596	0,644	0,688	0,730	0,769	0,807	0,843	0,877	0,910	0,973	1,032	1,088
30HCX10	0,662	0,715	0,764	0,811	0,855	0,896	0,936	0,974	1,011	1,081	1,147	1,209
30HCX12	0,750	0,810	0,866	0,919	0,968	1,016	1,061	1,104	1,146	1,225	1,299	1,369
30HCX18	1,180	1,275	1,363	1,445	1,523	1,598	1,669	1,737	1,802	1,927	2,044	2,154

HCX80° - Hollow Cone

	3 BAR	4 BAR	5 BAR	6 BAR	7 BAR	8 BAR	9 BAR	10 BAR	11 BAR
30HCX2	VF	VF	VF	VF	VF	VF	VF	VF	VF
30HCX3	VF	VF	VF	VF	VF	VF	VF	VF	VF
30HCX4	F	VF	VF	VF	VF	VF	VF	VF	VF
30HCX6	F	VF	VF	VF	VF	VF	VF	VF	VF
30HCX8	F	VF	VF	VF	VF	VF	VF	VF	VF
30HCX9	F	VF	VF	VF	VF	VF	VF	VF	VF
30HCX10	F	F	VF	VF	VF	VF	VF	VF	VF
30HCX12	F	F	F	VF	VF	VF	VF	VF	VF
30HCX18	F	F	F	F	F	F	VF	VF	VF

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Plant Health
Pattern	Hollow Cone
Technology	Swirl
Material	Polyacetal
Spray Angle	80°
Pressure Range	40-150 PSI [3-10 BAR]
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
30HCX2	CAP04-20
30HCX3	CAP04-20
30HCX4	CAP04-20
30HCX6	CAP04-20
30HCX8	CAP04-20
30HCX9	CAP04-20
30HCX10	CAP04-20
30HCX12	CAP04-20
30HCX18	CAP04-20



Hollow Cone Tips - Ceramic ATR 80°



The Albuz® hollow-cone ceramic spray tips produce finely atomized droplets in a hollow-cone, 80-degree pattern.

- Easily separated, two-piece construction for simple cleaning
- Wide operating pressure range suitable for many applications
- Commonly used in airblast and other high pressure spraying applications

US Units

Spray Tip	Flow Rate, GPM at Pressure, PSI												
	40	50	60	70	80	90	100	120	150	200	250	300	350
ATR-WHITE	0.053	0.060	0.065	0.070	0.075	0.079	0.083	0.091	0.101	0.116	0.129	0.141	0.152
ATR-LILAC	0.071	0.079	0.087	0.093	0.099	0.105	0.111	0.121	0.134	0.154	0.171	0.187	0.201
ATR-BROWN	0.095	0.106	0.116	0.125	0.133	0.141	0.148	0.161	0.180	0.206	0.230	0.250	0.270
ATR-YELLOW	0.144	0.161	0.176	0.189	0.202	0.214	0.226	0.247	0.275	0.317	0.354	0.387	0.417
ATR-ORANGE	0.196	0.218	0.239	0.257	0.274	0.290	0.306	0.334	0.372	0.428	0.477	0.521	0.561
ATR-RED	0.275	0.306	0.333	0.359	0.382	0.404	0.425	0.463	0.515	0.591	0.657	0.716	0.771
ATR-GRAY	0.299	0.333	0.362	0.390	0.415	0.439	0.461	0.502	0.558	0.638	0.709	0.773	0.831
ATR-GREEN	0.356	0.395	0.430	0.463	0.493	0.521	0.547	0.596	0.662	0.758	0.842	0.918	0.987
ATR-BLACK	0.399	0.443	0.483	0.520	0.554	0.585	0.615	0.671	0.745	0.854	0.949	1.034	1.113
ATR-BLUE	0.488	0.542	0.591	0.636	0.678	0.716	0.753	0.821	0.913	1.046	1.163	1.268	1.364

Features	
Common Use	Plant Health
Pattern	Hollow Cone
Technology	Swirl
Material	Ceramic
Spray Angle	80°
Pressure Range	40-350 PSI (3-24 BAR)
Configuration	Tip
Part Numbers	
ATR 80°	Caps (25 Pack)
ATR-WHITE	CAP05-20
ATR-LILAC	CAP05-20
ATR-BROWN	CAP05-20
ATR-YELLOW	CAP05-20
ATR-ORANGE	CAP05-20
ATR-RED	CAP05-20
ATR-GRAY	CAP05-20
ATR-GREEN	CAP05-20
ATR-BLACK	CAP05-20
ATR-BLUE	CAP05-20

ATR 80° - Hollow Cone

	40 PSI	50 PSI	60 PSI	70 PSI	80 PSI	90 PSI	100 PSI	125 PSI	150 PSI	350 PSI
ATR- White	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF
ATR- Lilac	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF
ATR- Brown	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF
ATR- Yellow	F	VF	VF	VF	VF	VF	VF	VF	VF	VF
ATR- Orange	F	F	VF	VF	VF	VF	VF	VF	VF	VF
ATR- Red	F	F	F	F	VF	VF	VF	VF	VF	VF
ATR- Gray	F	F	F	F	F	VF	VF	VF	VF	VF
ATR- Green	F	F	F	F	F	VF	VF	VF	VF	VF
ATR- Black	F	F	F	F	F	F	F	F	F	VF
ATR- Blue	M	M	M	M	F	F	F	F	F	F

Droplet size based on ASABE S572.1 standard.



Hollow Cone Tips - Ceramic HCA 80°



The Albuz® hollow-cone, extra-long life ceramic spray tips produce finely atomized droplets in a hollow-cone, 80-degree pattern.

- Easily separated, two-piece construction for simple cleaning
- Used in high pressure spraying applications where superior coverage is needed
- Wide operating pressure range for application flexibility

US Units

Spray Tip	Flow Rate, GPM at Pressure, PSI												
	40	50	60	70	80	90	100	120	150	200	250	300	350
HCA-01	0.067	0.075	0.082	0.088	0.094	0.100	0.105	0.115	0.129	0.149	0.167	0.183	0.197
HCA-015	0.100	0.112	0.122	0.132	0.141	0.150	0.158	0.173	0.194	0.224	0.250	0.274	0.296
HCA-02	0.133	0.149	0.163	0.176	0.189	0.200	0.211	0.231	0.258	0.298	0.333	0.365	0.394
HCA-025	0.167	0.186	0.204	0.220	0.236	0.250	0.264	0.289	0.323	0.373	0.417	0.456	0.493
HCA-03	0.200	0.224	0.245	0.265	0.283	0.300	0.316	0.346	0.387	0.447	0.500	0.548	0.592
HCA-045	0.300	0.335	0.367	0.397	0.424	0.450	0.474	0.520	0.581	0.671	0.750	0.822	0.887

Standard pack available

4-pack available add prefix "4Pk-"

Features	
Common Use	Plant Health
Pattern	Hollow Cone
Technology	Swirl
Material	Ceramic
Spray Angle	80°
Pressure Range	40-350 PSI (3-24 BAR)
Configuration	Tip
Part Numbers	
HCA 80°	Caps (25 Pack)
HCA-01	CAP05-20
HCA-015	CAP05-20
HCA-02	CAP05-20
HCA-025	CAP05-20
HCA-03	CAP05-20
HCA-045	CAP05-20

HCA 80° - Hollow Cone

	40 PSI	50 PSI	60 PSI	70 PSI	80 PSI	90 PSI	100 PSI	125 PSI	150 PSI	350 PSI
HCA-01	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF
HCA-015	VF	VF	VF	VF	VF	VF	VF	VF	VF	VF
HCA-02	F	F	VF	VF	VF	VF	VF	VF	VF	VF
HCA-025	F	F	F	VF	VF	VF	VF	VF	VF	VF
HCA-03	F	F	F	F	F	VF	VF	VF	VF	VF
HCA-045	M	F	F	F	F	F	F	VF	VF	VF

Droplet size based on ASABE S572.1 standard.



Hollow Cone Tips - Ceramic TVI 80°



The Albuz® TVI drastically reduces the potential for spray drift in broadcast, directed, and air-blast applications. The air-induced hollow-cone pattern stays on target, saving chemical and reducing environmental impact.

- All ceramic orifice creates extremely long life
- Air-filled droplets control drift and reduce chemical waste

US Units

Spray Tip	Flow Rate, GPM at Pressure, PSI															
	70	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360
TVI-80005	0.066	0.071	0.079	0.087	0.094	0.100	0.106	0.112	0.117	0.122	0.127	0.132	0.137	0.141	0.146	0.150
TVI-800075	0.099	0.106	0.119	0.130	0.140	0.150	0.159	0.168	0.176	0.184	0.191	0.198	0.205	0.212	0.219	0.225
TVI-80015	0.198	0.212	0.237	0.260	0.281	0.300	0.318	0.335	0.352	0.367	0.382	0.397	0.411	0.424	0.437	0.450
TVI-8002	0.265	0.283	0.316	0.346	0.374	0.400	0.424	0.447	0.469	0.490	0.510	0.529	0.548	0.566	0.583	0.600
TVI-80025	0.331	0.354	0.395	0.433	0.468	0.500	0.530	0.559	0.586	0.612	0.637	0.661	0.685	0.707	0.729	0.750
TVI-8003	0.397	0.424	0.474	0.520	0.561	0.600	0.636	0.671	0.704	0.735	0.765	0.794	0.822	0.849	0.875	0.900

TVI 80° - Hollow Cone

	70 PSI	150 PSI	200 PSI
TVI-80005	XC	C	C
TVI-800075	XC	C	C
TVI-80015	XC	C	C
TVI-8002	XC	XC	VC
TVI-80025	XC	XC	VC

Droplet size based on ASABE S572.1 standard.

Features

Common Use	Plant Health
Pattern	Hollow Cone
Technology	Air Induction
Material	Ceramic
Spray Angle	80°
Pressure Range	70-360 PSI [5-25 BAR]
Configuration	Tip

Part Numbers

Tips 80°	Caps (25 Pack)
TVI-80005	CAP05-20
TVI-800075	CAP05-20
TVI-80015	CAP05-20
TVI-8002	CAP05-20
TVI-80025	CAP05-20
TVI-8003	CAP05-20



Flat Fan Spray Tips - Ceramic AVI 80°



The AVI 80° air-inducing fan pattern spray tip is ideal for use in directed spray applications and on air-blast sprayers. Research shows AVI spray tips can be used to deliver more spray on target with less loss to airborne drift and to the ground than conventional applications.

- Ceramic orifice for extra long life and accuracy
- Venturi design delivers more spray on-target
- Color coded for simple selection
- 110° fan model ideal for broadcast spraying
(See page 136 for more info.)

US Units

Spray Tip	Flow Rate, GPM at Pressure, PSI												
	40	50	60	70	80	90	100	120	150	200	250	300	350
01	0.100	0.112	0.122	0.132	0.141	0.150	0.158	0.173	0.194	0.224	0.250	0.274	0.296
015	0.150	0.168	0.184	0.198	0.212	0.225	0.237	0.260	0.290	0.335	0.375	0.411	0.444
02	0.200	0.224	0.245	0.265	0.283	0.300	0.316	0.346	0.387	0.447	0.500	0.548	0.592
025	0.250	0.280	0.306	0.331	0.354	0.375	0.395	0.433	0.484	0.559	0.625	0.685	0.740
03	0.300	0.335	0.367	0.397	0.424	0.450	0.474	0.520	0.581	0.671	0.750	0.822	0.887
04	0.400	0.447	0.490	0.529	0.566	0.600	0.632	0.693	0.775	0.894	1.000	1.095	1.183

Features	
Common Use	Plant Health
Pattern	Tapered Flat Fan
Technology	Air Induction
Material	Ceramic
Spray Angle	80°
Pressure Range	40-350 PSI (3-24 BAR)
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
AVI-8001	CAP01-01
AVI-80015	CAP01-015
AVI-8002	CAP01-02
AVI-80025	CAP01-025
AVI-8003	CAP01-03
AVI-8004	CAP01-04



Flat Fan Spray Tips - Ceramic AXI 80°



The AXI 80° extended range fan pattern tip can be used for directed applications of a variety of chemistries and products. They are well suited to applications where smaller droplets are favored. They are equipped with a ceramic orifice to provide long-lasting performance.

- Ceramic orifice for extra long life
- Simple, reliable design
- Color coded for simple selection
- FastCap includes tip, cap and gasket
- 110° fan model ideal for broadcast spraying
(See page 139 for more info.)

US Units

Spray Tip	Flow Rate, GPM at Pressure, PSI												
	40	50	60	70	80	90	100	120	150	200	250	300	350
01	0.100	0.112	0.122	0.132	0.141	0.150	0.158	0.173	0.194	0.224	0.250	0.274	0.296
015	0.150	0.168	0.184	0.198	0.212	0.225	0.237	0.260	0.290	0.335	0.375	0.411	0.444
02	0.200	0.224	0.245	0.265	0.283	0.300	0.316	0.346	0.387	0.447	0.500	0.548	0.592
025	0.250	0.280	0.306	0.331	0.354	0.375	0.395	0.433	0.484	0.559	0.625	0.685	0.740
03	0.300	0.335	0.367	0.397	0.424	0.450	0.474	0.520	0.581	0.671	0.750	0.822	0.887
04	0.400	0.447	0.490	0.529	0.566	0.600	0.632	0.693	0.775	0.894	1.000	1.095	1.183
05	0.500	0.559	0.612	0.661	0.707	0.750	0.791	0.866	0.968	1.118	1.250	1.369	1.479
06	0.600	0.671	0.735	0.794	0.849	0.900	0.949	1.039	1.162	1.342	1.500	1.643	1.775

Features	
Common Use	Plant Health
Pattern	Tapered Flat Fan
Technology	Elliptical Orifice
Material	Ceramic
Spray Angle	80°
Pressure Range	40-350 PSI (3-24 BAR)
Configuration	Tip, Fast Cap
Part Numbers	
Tips 80°	FastCaps 80°
AXI-80015	FC-AXI-80015
AXI-8002	FC-AXI-8002
AXI-8003	FC-AXI-8003
AXI-8004	FC-AXI-8004
AXI-8005	FC-AXI-8005
AXI-8006	FC-AXI-8006



Full Cone Directed Spray Tips - FCX 80°



The FCX full-cone spray tip is especially suited for coverage sensitive applications of insecticide/fungicides.

- Full cone pattern to give superior coverage with non-air induced droplets
- 80° spray angle makes the product easy to direct for spot applications
- Broad operating range for application flexibility

US Units

Tip Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ²			
			MPH								20 inch nozzle spacing			
			4	5	6	8	10	12	15	20	2	3	4	5
02	15	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	20	0.23	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4	0.78	0.52	0.39	0.31
	30	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38
	40	0.33	24.5	19.6	16.3	12.3	9.8	8.2	6.5	4.9	1.13	0.75	0.56	0.45
	50	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
	60	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	70	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	80	0.46	34.2	27.3	22.8	17.1	13.7	11.4	9.1	6.8	1.57	1.05	0.78	0.63
	100	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71
	125	0.58	43.1	34.5	28.7	21.5	17.2	14.4	11.5	8.6	1.98	1.32	0.99	0.79
	150	0.63	46.8	37.4	31.2	23.4	18.7	15.6	12.5	9.4	2.15	1.43	1.07	0.86
03	15	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	30	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57
	40	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
	50	0.55	40.8	32.7	27.2	20.4	16.3	13.6	10.9	8.2	1.88	1.25	0.94	0.75
	60	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	70	0.65	48.3	38.6	32.2	24.1	19.3	16.1	12.9	9.7	2.22	1.48	1.11	0.89
	80	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
	100	0.77	57.2	45.7	38.1	28.6	22.9	19.1	15.2	11.4	2.63	1.75	1.31	1.05
	125	0.87	64.6	51.7	43.1	32.3	25.8	21.5	17.2	12.9	2.97	1.98	1.48	1.19
	150	0.95	70.5	56.4	47.0	35.3	28.2	23.5	18.8	14.1	3.24	2.16	1.62	1.30
04	15	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	20	0.46	34.2	27.3	22.8	17.1	13.7	11.4	9.1	6.8	1.57	1.05	0.78	0.63
	30	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78
	40	0.65	48.3	38.6	32.2	24.1	19.3	16.1	12.9	9.7	2.22	1.48	1.11	0.89
	50	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00
	60	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09
	70	0.86	63.9	51.1	42.6	31.9	25.5	21.3	17.0	12.8	2.93	1.96	1.47	1.17
	80	0.92	68.3	54.6	45.5	34.2	27.3	22.8	18.2	13.7	3.14	2.09	1.57	1.25
	100	1.03	76.5	61.2	51.0	38.2	30.6	25.5	20.4	15.3	3.51	2.34	1.76	1.40
	125	1.15	85.4	68.3	56.9	42.7	34.2	28.5	22.8	17.1	3.92	2.61	1.96	1.57
	150	1.26	93.6	74.8	62.4	46.8	37.4	31.2	24.9	18.7	4.30	2.86	2.15	1.72
05	15	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68
	20	0.58	43.1	34.5	28.7	21.5	17.2	14.4	11.5	8.6	1.98	1.32	0.99	0.79
	30	0.71	52.7	42.2	35.1	26.4	21.1	17.6	14.1	10.5	2.42	1.61	1.21	0.97
	40	0.82	60.9	48.7	40.6	30.4	24.4	20.3	16.2	12.2	2.80	1.86	1.40	1.12
	50	0.91	67.6	54.1	45.0	33.8	27.0	22.5	18.0	13.5	3.10	2.07	1.55	1.24
	60	1.00	74.3	59.4	49.5	37.1	29.7	24.8	19.8	14.9	3.41	2.27	1.71	1.36
	70	1.08	80.2	64.2	53.5	40.1	32.1	26.7	21.4	16.0	3.68	2.46	1.84	1.47
	80	1.15	85.4	68.3	56.9	42.7	34.2	28.5	22.8	17.1	3.92	2.61	1.96	1.57
	100	1.29	95.8	76.6	63.9	47.9	38.3	31.9	25.5	19.2	4.40	2.93	2.20	1.76
	125	1.44	107	85.5	71.3	53.5	42.8	35.6	28.5	21.4	4.91	3.27	2.46	1.96
	150	1.60	117	93.9	78.2	58.7	46.9	39.1	31.3	23.5	5.39	3.59	2.69	2.16
06	15	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	20	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
	30	0.85	63.1	50.5	42.1	31.6	25.2	21.0	16.8	12.6	2.90	1.93	1.45	1.16
	40	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34
	50	1.10	81.7	65.3	54.5	40.8	32.7	27.2	21.8	16.3	3.75	2.50	1.88	1.50
	60	1.20	89.1	71.3	59.4	44.6	35.6	29.7	23.8	17.8	4.09	2.73	2.05	1.64
	70	1.30	96.5	77.2	64.4	48.3	38.6	32.2	25.7	19.3	4.43	2.96	2.22	1.77
	80	1.39	103	82.6	68.8	51.6	41.3	34.4	27.5	20.6	4.74	3.16	2.37	1.90
	100	1.55	115	92.1	76.7	57.5	46.0	38.4	30.7	23.0	5.29	3.52	2.64	2.11
	125	1.73	128	103	85.6	64.2	51.4	42.8	34.3	25.7	5.90	3.93	2.95	2.36
	150	1.90	141	113	94.1	70.5	56.4	47.0	37.6	28.2	6.48	4.32	3.24	2.59



Metric Units

Tip Size	Pressure (BAR)	Flow Rate (LPM)	Flow L/min- 50 cm Spacing KMH							
			7	8	10	12	15	20	25	30
02	1	0.74	127	111	89	74	59	44	36	30
	2	1.05	180	158	126	105	84	63	50	42
	3	1.28	219	192	154	128	102	77	61	51
	4	1.48	254	222	178	148	118	89	71	59
	5	1.65	283	248	198	165	132	99	79	66
	6	1.81	310	272	217	181	145	109	87	72
	7	1.96	336	294	235	196	157	118	94	78
	8	2.09	358	314	251	209	167	125	100	84
	9	2.22	381	333	266	222	178	133	107	89
	10	2.34	401	351	281	234	187	140	112	94
03	1	1.12	192	168	134	112	90	67	54	45
	2	1.58	271	237	190	158	126	95	76	63
	3	1.94	333	291	233	194	155	116	93	78
	4	2.23	382	335	268	223	178	134	107	89
	5	2.50	429	375	300	250	200	150	120	100
	6	2.73	468	410	328	273	218	164	131	109
	7	2.96	507	444	355	296	237	178	142	118
	8	3.17	543	476	380	317	254	190	152	127
	9	3.36	576	504	403	336	269	202	161	134
	10	3.54	607	531	425	354	283	212	170	142
04	1	1.49	255	224	179	149	119	89	72	60
	2	2.11	362	317	253	211	169	127	101	84
	3	2.58	442	387	310	258	206	155	124	103
	4	2.98	511	447	358	298	238	179	143	119
	5	3.33	571	500	400	333	266	200	160	133
	6	3.65	626	548	438	365	292	219	175	146
	7	3.94	675	591	473	394	315	236	189	158
	8	4.21	722	632	505	421	337	253	202	168
	9	4.47	766	671	536	447	358	268	215	179
	10	4.71	807	707	565	471	377	283	226	188
05	1	1.86	319	279	223	186	149	112	89	74
	2	2.63	451	395	316	263	210	158	126	105
	3	3.22	552	483	386	322	258	193	155	129
	4	3.72	638	558	446	372	298	223	179	149
	5	4.16	713	624	499	416	333	250	200	166
	6	4.56	782	684	547	456	365	274	219	182
	7	4.92	843	738	590	492	394	295	236	197
	8	5.26	902	789	631	526	421	316	252	210
	9	5.58	957	837	670	558	446	335	268	223
	10	5.88	1008	882	706	588	470	353	282	235
06	1	2.23	382	335	268	223	178	134	107	89
	2	3.15	540	473	378	315	252	189	151	126
	3	3.86	662	579	463	386	309	232	185	154
	4	4.45	763	668	534	445	356	267	214	178
	5	4.98	854	747	598	498	398	299	239	199
	6	5.45	934	818	654	545	436	327	262	218
	7	5.89	1010	884	707	589	471	353	283	236
	8	6.29	1078	944	755	629	503	377	302	252
	9	6.69	1147	1004	803	669	535	401	321	268
	10	7.05	1209	1058	846	705	564	423	338	282
08	1	2.98	511	447	358	298	238	179	143	119
	2	4.21	722	632	505	421	337	253	202	168
	3	5.16	885	774	619	516	413	310	248	206
	4	5.95	1020	893	714	595	476	357	286	238
	5	6.66	1142	999	799	666	533	400	320	266
	6	7.29	1250	1094	875	729	583	437	350	292
	7	7.88	1351	1182	946	788	630	473	378	315
	8	8.43	1445	1265	1012	843	674	506	405	337
	9	8.94	1533	1341	1073	894	715	536	429	358
	10	9.42	1615	1413	1130	942	754	565	452	377

Features	
Common Use	Plant Health
Pattern	Full Cone
Technology	Swirl
Material	Polyacetal
Spray Angle	80°
Pressure Range	15-150 PSI (1-10 BAR)
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
30FCX02	CAP04-02
30FCX03	CAP04-03
30FCX04	CAP04-04
30FCX05	CAP04-05
30FCX06	CAP04-06



Full Cone Spray Tips - Ceramic Discs & Cores 14°-71°



Albuz® Ceramic discs and cores are the longest lasting disc-core tips, making them ideal for abrasive agricultural and horticultural sprays. DCC/CRC tips will outlast stainless steel disc-core tips by up to 10 times and perform superbly at high pressures common on many air-blast and directed sprayers.

US Units

DISC	Full Cone CORE	Flow Rate GPM at Pressure, PSI										Spray Angle Degrees Pressure, PSI		
		10	20	30	40	60	80	100	150	200	300	20	40	80
DCC-01	CRC-31	0.08	0.11	0.13	0.15	0.18	0.20	0.23	0.27	0.31	0.37	49	47	43
DCC-02	CRC-31	0.12	0.16	0.19	0.22	0.26	0.30	0.33	0.40	0.45	0.55	62	63	61
DCC-03	CRC-31	0.13	0.18	0.21	0.24	0.29	0.33	0.37	0.44	0.50	0.6	63	65	63
DCC-01	CRC-35	0.08	0.11	0.13	0.14	0.17	0.2	0.22	0.26	0.29	0.35	19	23	26
DCC-02	CRC-35	0.14	0.18	0.24	0.25	0.3	0.34	0.37	0.45	0.51	0.60	40	44	47
DCC-03	CRC-35	0.16	0.22	0.26	0.30	0.36	0.41	0.45	0.55	0.62	0.74	45	50	52
DCC-04	CRC-35	0.27	0.37	0.44	0.50	0.60	0.70	0.79	0.93	1.10	1.30	68	70	71
DCC-05	CRC-35	0.34	0.48	0.58	0.66	0.8	0.92	1.00	1.20	1.40	1.70	67	69	71
DCC-02	CRC-56	-	-	0.21	0.25	0.3	0.35	0.39	0.47	5.50	0.67	-	14	17
DCC-03	CRC-56	-	-	0.29	0.34	0.41	0.48	0.53	0.65	7.50	0.92	-	20	23
DCC-04	CRC-56	-	0.39	0.48	0.55	0.67	0.78	0.87	1.10	1.20	1.50	20	26	29
DCC-05	CRC-56	0.38	0.54	0.66	0.76	0.93	1.10	1.20	1.50	1.70	2.10	26	32	34
DCC-06	CRC-56	0.55	0.78	0.95	1.10	1.40	1.60	1.70	2.10	2.50	3.00	34	39	41
DCC-07	CRC-56	0.76	1.10	1.30	1.50	1.90	2.20	2.40	2.90	3.40	4.20	45	52	54

Features		
Common Use	Plant Health	
Pattern	Full Cone	
Technology	Swirl	
Material	Ceramic	
Spray Angle	14°-71°	
Pressure Range	10-300 PSI [1-20 BAR]	
Configuration	Tip	
Part Numbers		
Discs	Cores	Caps (25 Pack)
DCC-01	CRC-31	CAP05-20
DCC-02	CRC-35	CAP05-20
DCC-03	CRC-56	CAP05-20
DCC-04	–	CAP05-20
DCC-05	–	CAP05-20
DCC-06	–	CAP05-20
DCC-07	–	CAP05-20



Flat Fan Spray Tips - Brass Off-Center OC 80°



The Hypro OC flat fan off-center brass spray tip is an economical tip for spraying around obstacles or defining the edge of a spray swath.

- Creates half of a broadcast pattern
- Generally positioned at the end of a boom
- Designed for use with overlapping broadcast patterns to provide precise width control

US Units

Tip Size	Droplet Size 80°	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000 ^{ft} 20 inch nozzle spacing			
				4	5	6	8	10	12	15	20	2	3	4	5
02	M	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
	F	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	F	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	F	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
03	M	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
	F	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	F	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46
	F	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
04	M	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	M	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	F	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
06	C	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71
	M	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	M	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91
	M	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00
08	C	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
	M	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09
	M	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21
	M	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34
12	C	30	1.04	77.2	61.8	51.5	38.6	30.9	25.7	20.6	15.4	3.55	2.36	1.77	1.42
	C	40	1.20	89.1	71.3	59.4	44.6	35.6	29.7	23.8	17.8	4.09	2.73	2.05	1.64
	C	50	1.34	99.5	79.6	66.3	49.7	39.8	32.2	26.5	19.9	4.57	3.05	2.28	1.83
	M	60	1.47	109	87.3	72.8	54.6	43.7	36.4	29.1	21.8	5.01	3.34	2.51	2.01
16	C	30	1.39	103	82.6	68.8	51.6	41.3	34.4	27.5	20.6	4.74	3.16	2.37	1.90
	C	40	1.60	119	95.0	79.2	59.4	47.5	39.6	31.7	23.8	5.46	3.64	2.73	2.18
	C	50	1.79	133	106	88.6	66.5	53.2	44.3	35.4	26.6	6.10	4.07	3.05	2.44
	C	60	1.96	146	116	97.0	72.8	58.2	48.5	38.8	29.1	6.68	4.46	3.34	2.67

Droplet size based on ASABE S572.1 standard.

Metric Units

Tip Size	Droplet Size 80°	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm Spacing							
				7	8	10	12	15	20	25	30
02	M	2	0.65	130	98	78	65	52	39	31	26
	F	2.5	0.73	146	110	88	73	58	44	35	29
	F	3	0.80	160	120	96	80	64	48	38	32
	F	4	0.92	184	138	110	92	74	55	44	37
03	M	2	0.98	196	147	118	98	78	59	47	39
	M	2.5	1.10	220	165	132	110	88	66	53	44
	F	3	1.20	240	180	144	120	96	72	58	48
	F	4	1.39	278	209	167	139	111	83	67	56
04	M	2	1.31	262	197	157	131	105	79	63	52
	M	2.5	1.46	292	219	175	146	117	88	70	58
	M	3	1.60	320	240	192	160	128	96	77	64
	F	4	1.85	370	278	222	185	148	111	89	74
06	C	2	1.96	392	294	235	196	157	118	94	78
	M	2.5	2.19	438	329	263	219	175	131	105	88
	M	3	2.40	480	360	288	240	192	144	115	96
	M	4	2.77	554	416	332	277	222	166	133	111
08	C	2	2.61	522	392	313	261	209	157	125	104
	C	2.5	2.92	584	438	350	292	234	175	140	117
	M	3	3.20	640	480	384	320	256	192	154	128
	M	4	3.70	740	555	444	370	296	222	178	148
12	C	2	3.92	784	588	470	392	314	235	188	157
	C	2.5	4.38	876	657	526	438	350	263	210	175
	C	3	4.80	960	720	576	480	384	288	230	192
	M	4	5.54	1108	831	665	554	443	332	266	222
16	C	2	5.23	1046	785	628	523	418	314	251	209
	C	2.5	5.84	1168	876	701	584	467	350	280	234
	C	3	6.40	1280	960	768	640	512	384	307	256
	C	4	7.39	1478	1109	887	739	591	443	355	296

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Unspecialized
Pattern	Off-Center Fan
Technology	Elliptical Orifice
Material	Brass
Spray Angle	80°
Pressure Range	30-60 PSI (2-4 BAR)
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
280C02	CAP00-20
280C03	CAP00-20
280C04	CAP00-20
280C06	CAP00-20
280C08	CAP00-20
280C12	CAP00-20
280C16	CAP00-20



Flat Fan Spray Tips - Ceramic Off-Center OCI 80°



The Albuz® OCI off-center flat fan ceramic spray tip provides excellent wear life for spraying around obstacles or defining the edge of a spraying swath.

US Units

Tip Size	Droplet Size 80°	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing MPH								GAL/1000ft ² 20 inch nozzle spacing				
				4	5	6	8	10	12	15	20	2	3	4	5	
02	M	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	M	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
	M	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	F	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
03	M	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	M	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
	M	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46	
	M	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50	
04	M	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	M	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
	M	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67	

Features	
Common Use	Unspecialized
Pattern	Off-Centered Fan
Technology	Elliptical Orifice
Material	Ceramic
Spray Angle	80°
Pressure Range	30-60 PSI (2-4 BAR)
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
OCI-8002	CAP00-02
OCI-8003	CAP00-03
OCI-8004	CAP00-04



Flat Fan Spray Tips - Ceramic AVI-OC 80°



The Albuz® AVI-OC air-inducing Venturi off-center ceramic spray tip with air suction provides large, air-filled droplets that burst on impact with target.

US Units

Tip Size	Droplet Size 80°	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing MPH								GAL/1000ft ² 20 inch nozzle spacing				
				4	5	6	8	10	12	15	20	2	3	4	5	
015	VC	40	0.15	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26	0.20	
	VC	50	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23	
	VC	60	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	
	VC	70	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
	VC	80	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29	
	C	90	0.23	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4	0.78	0.52	0.39	0.31	
	C	100	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
	XC	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27	
02	VC	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30	
	VC	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33	
	VC	70	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	
	VC	80	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
	VC	90	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
	VC	100	0.32	23.8	19.0	15.8	11.9	9.5	7.9	6.3	4.8	1.09	0.73	0.55	0.44	
	XC	40	0.25	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34	
	VC	50	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	
025	VC	60	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42	
	VC	70	0.33	24.5	19.6	16.3	12.3	9.8	8.2	6.5	4.9	1.13	0.75	0.56	0.45	
	VC	80	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	
	VC	90	0.38	28.2	22.6	18.8	14.1	11.3	9.4	7.5	5.6	1.30	0.86	0.65	0.52	
	VC	100	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	XC	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41	
	XC	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46	
	XC	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50	
03	VC	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	VC	80	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57	
	VC	90	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
	VC	100	0.47	34.9	27.9	23.3	17.4	14.0	11.6	9.3	7.0	1.60	1.07	0.80	0.64	
	XC	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	
	XC	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61	
	XC	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67	
	XC	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72	
04	VC	80	0.57	42.3	33.9	28.2	21.2	16.9	14.1	11.3	8.5	1.94	1.30	0.97	0.78	
	VC	90	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82	
	VC	100	0.63	46.8	37.4	31.2	23.4	18.7	15.6	12.5	9.4	2.15	1.43	1.07	0.86	

Features	
Common Use	Weeds
Pattern	Off-Center Fan
Technology	Air Induction
Material	Ceramic
Spray Angle	80°
Pressure Range	40-100 PSI (3-7 BAR)
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
AVI-OC-80015	CAP01-015
AVI-OC-8002	CAP01-02
AVI-OC-80025	CAP01-025
AVI-OC-8003	CAP01-03
AVI-OC-8004	CAP01-04

Albuz® is a registered trademark of SAINT-GOBAIN SOLCERA, SAINT GOBAIN CERAMIQUES AVANCEES DESMARQUEST, CERAMIQUES TECHNIQUES DESMARQUEST, and SOCIETE DESMARQUEST ET CEC.
Hypro® is a registered trademark of Pentair..



Boomless Flat Fan Nozzles - XT-Boom X Tender




The XT introduces boomless spray technology, enabling spray to be targeted into places that conventional booms and other tips cannot reach. XT delivers a uniform spray pattern over a distance of up to 16 feet (4.9 m). Ideal for weed control in forests and pastureland.

- Ideal for applications where a conventional boom cannot be used due to obstacles
- Common uses include orchard, vineyard, forestry, pasture, turf and golf course spraying, as well as maintaining rights-of-way and fence rows
- Excellent low-drift option while extending spray reach
- Large droplet size reduces spray drift and promotes spray penetration
- Maintains a consistent spray swath over a pressure range of 30-60 psi (2-5 bar)
- Standard models with precision-molded polyacetal tip and threaded stainless steel body provide excellent durability and low maintenance


US Units

Tip Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre at swath shown MPH								GAL/1000ft ²				Swath (Ft) at 40 PSI 48 in high
			4	5	6	8	10	12	15	20	2	3	4	5	
10 (1/4")	30	0.9	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8	0.41	0.27	0.20	0.16	13
	40	1.0	9.9	7.9	6.6	5.0	4.0	3.3	2.6	2.0	0.45	0.30	0.23	0.18	
	50	1.1	10.9	8.7	7.3	5.4	4.4	3.6	2.9	2.2	0.50	0.33	0.25	0.20	
	60	1.2	11.9	9.5	7.9	5.9	4.8	4.0	3.2	2.4	0.55	0.36	0.27	0.22	
20 (1/4")	30	0.9	13.6	10.9	9.0	6.8	5.4	4.5	3.6	2.7	0.62	0.42	0.31	0.25	15
	40	1.0	16.0	12.8	10.6	8.0	6.4	5.3	4.3	3.2	0.73	0.49	0.37	0.29	
	50	1.1	17.6	14.1	11.7	8.8	7.0	5.9	4.7	3.5	0.81	0.54	0.40	0.32	
	60	1.2	19.2	15.3	12.8	9.6	7.7	6.4	5.1	3.8	0.88	0.59	0.44	0.35	
24 (1/4")	30	0.9	16.2	13.0	10.8	8.1	6.5	5.4	4.3	3.2	0.75	0.50	0.37	0.30	16
	40	1.0	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	0.85	0.57	0.43	0.34	
	50	1.1	20.9	16.7	13.9	10.4	8.4	7.0	5.6	4.2	0.96	0.64	0.48	0.38	
	60	1.2	22.4	17.9	15.0	11.2	9.0	7.5	6.0	4.5	1.03	0.69	0.51	0.41	
43 (3/8")	30	0.9	31.6	25.3	21.1	15.8	12.6	10.5	8.4	6.3	1.45	0.97	0.72	0.58	14
	40	1.0	36.7	29.4	24.5	18.3	14.7	12.2	9.8	7.3	1.68	1.12	0.84	0.67	
	50	1.1	41.0	32.8	27.3	20.5	16.4	13.7	10.9	8.2	1.88	1.25	0.94	0.75	
	60	1.2	45.2	36.2	30.2	22.6	18.1	15.1	12.1	9.0	2.08	1.38	1.04	0.83	
80 (1/2")	30	0.9	68.3	54.6	45.5	34.2	27.3	22.8	18.2	13.7	3.14	2.09	1.57	1.25	13
	40	1.0	79.2	63.4	52.8	39.6	31.7	26.4	21.1	15.8	3.64	2.42	1.82	1.45	
	50	1.1	88.1	70.5	58.7	44.1	35.2	29.4	23.5	17.6	4.04	2.70	2.02	1.62	
	60	1.2	97.0	77.6	64.7	48.5	38.8	32.3	25.9	19.4	4.45	2.97	2.23	1.78	
167 (3/4")	30	0.9	128	103	85.4	64.1	51.3	42.7	34.2	25.6	5.88	3.92	2.94	2.35	15
	40	1.0	148	118	98.4	73.8	59.0	49.2	39.4	29.5	6.78	4.52	3.39	2.71	
	50	1.1	165	132	110	82.6	66.1	55.1	44.1	33.1	7.59	5.06	3.79	3.03	
	60	1.2	181	145	121	90.6	72.5	60.4	48.3	36.2	8.32	5.54	4.16	3.33	
215 (3/4")	30	0.9	144	115	95.9	71.9	57.5	48.0	38.4	28.8	6.60	4.40	3.30	2.64	16
	40	1.0	166	133	111	83.1	66.5	55.4	44.3	33.3	7.63	5.09	3.82	3.05	
	50	1.1	186	149	124	92.8	74.3	61.9	49.5	37.1	8.52	5.68	4.26	3.41	
	60	1.2	203	163	136	102	81.4	67.8	54.2	40.7	9.34	6.22	4.67	3.73	

Typical Spray Pattern Produced by XT Series



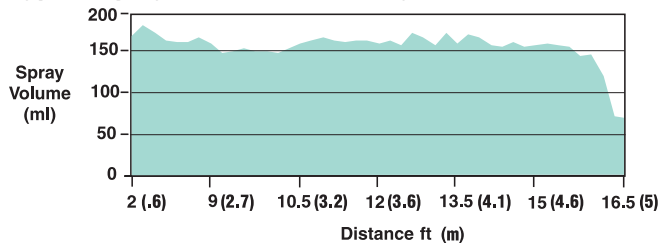


Common Uses of the Boom X Tender Spray Nozzles

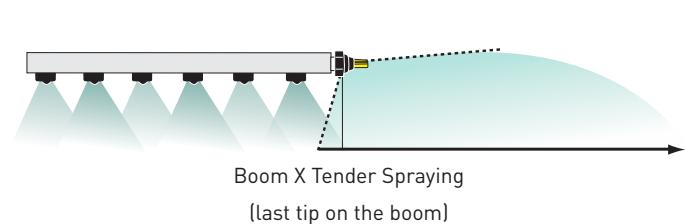

Adjustable Swath Width

Swath width can be increased or decreased by adjusting the angle of the tip +/- 18°.

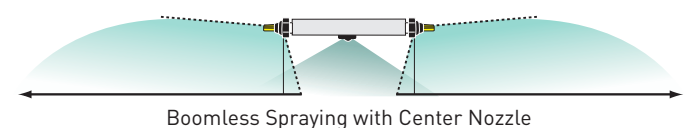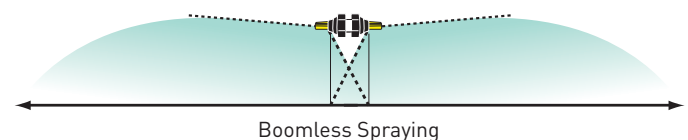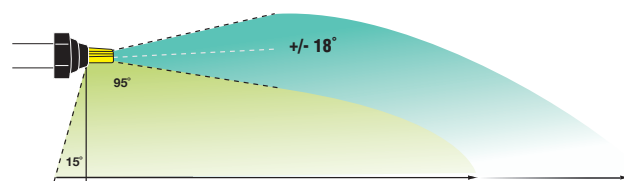



Boom X Tender nozzles are ideal for boomless spraying or as the last tip on a boom.



Hypro's Boom X Tender nozzles provide excellent coverage throughout the swath width for superior results.

Metric Units

Tip Size	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - at swath shown KM/H											Swath Width (M) @ 2.76 BAR 1.22 meters high
			4	5	6	7	8	10	12	14	16	18	20	
10 (1/4 inch)	2	3.2	124	99	83	71	62	50	41	35	31	28	25	3.9
	3	3.9	152	121	101	87	76	61	51	43	38	34	30	
	4	4.6	175	140	117	100	88	70	58	50	44	39	35	
20 (1/4 inch)	2	6.4	201	161	134	115	101	81	67	58	50	45	40	4.8
	3	7.9	247	197	165	141	123	99	82	71	62	55	49	
	4	9.1	285	228	190	163	142	114	95	81	71	63	57	
24 (1/4 inch)	2	7.7	237	189	158	135	118	95	79	68	59	53	47	4.9
	3	9.5	290	232	193	166	145	116	97	83	73	64	58	
	4	10.9	335	268	223	191	167	134	112	96	84	74	67	
43 (3/8 inch)	2	13.9	473	378	315	270	236	189	158	135	118	105	95	4.4
	3	17	579	463	386	331	289	232	193	165	145	129	116	
	4	19.6	668	535	446	382	334	267	223	191	167	149	134	
80 (1/2 inch)	2	25.8	992	793	661	567	496	397	331	283	248	220	198	3.9
	3	31.6	1215	972	810	694	607	486	405	347	304	270	243	
	4	36.5	1403	1122	935	802	701	561	468	401	351	312	281	
167 (3/4 inch)	2	53.8	1878	1502	1252	1073	939	751	626	537	469	417	376	4.3
	3	65.9	2300	1840	1533	1314	1150	920	767	657	575	511	460	
	4	76.1	2656	2125	1771	1518	1328	1062	885	759	664	590	531	
215 (3/4 inch)	2	69.3	2122	1697	1414	1212	1061	849	707	606	530	471	424	4.9
	3	84.9	2598	2079	1732	1485	1299	1039	866	742	650	577	520	
	4	98	3000	2400	2000	1715	1500	1200	1000	857	750	667	600	

Features		
Common Use	Weeds	
Pattern	Boomless Fan	
Technology	Pre-Orifice	
Material	Stainless or Polyacetal	
Spray Angle	105°	
Pressure Range	30-60 PSI (2-5 BAR)	
Configuration	MNPT & FastCap	
Part Numbers		
FastCaps	MNPT	Parts Kits for MNPT version
FC-XT010	XT010	XT010-GIOKIT
FC-XT020	XT020	XT020-GIOKIT
FC-XT024	XT024	XT024-GIOKIT
FC-XT043	XT043	XT043-GIOKIT
-	XT080	XT080-GIOKIT
-	XT167	XT167-GIOKIT
-	XT215	XT215-GIOKIT
Replacement FastCap Seal		
22W11MF64		



Model	Description
9950-0033	Boom X Tender Tee/Swivel Kit for use with 1/4" NPT or Fastcap XT Nozzles



Acid-Resistant FanTip 110°



The FanTip is a general spray tip that produces a mixed droplet spectrum over the 30-60 psi (2-4 bar) operational pressure range. It is good for broadcast applications of acidic spray, such as defoliants.

- Acid-resistant material construction
- Economical option for general spraying
- Simple one-piece design

US Units

Tip Size	Droplet Size	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing								GAL/1000ft ² 20 inch nozzle spacing			
				4	5	6	8	10	12	15	20	4	5	6	7
02	F	30	0.17	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29	0.23
	F	40	0.20	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34	0.27
	F	50	0.22	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.38	0.30
	F	60	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33
03	F	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35
	M	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41
	M	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46
	M	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50
04	M	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48
	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55
	F	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61
	F	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67
05	M	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59
	M	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68
	M	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76
	M	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83
06	M	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71
	M	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82
	M	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91
	M	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00
08	C	30	0.69	51.2	41.0	34.2	25.6	20.5	17.1	13.7	10.2	2.35	1.57	1.18	0.94
	C	40	0.80	59.4	47.5	39.6	29.7	23.8	19.8	15.8	11.9	2.73	1.82	1.36	1.09
	C	50	0.89	66.1	52.9	44.1	33.0	26.4	22.0	17.6	13.2	3.03	2.02	1.52	1.21
	C	60	0.98	72.8	58.2	48.5	36.4	29.1	24.3	19.4	14.6	3.34	2.23	1.67	1.34
10	C	30	0.87	64.6	51.7	43.1	32.3	25.8	21.5	17.2	12.9	2.97	1.98	1.48	1.19
	C	40	1.00	74.3	59.4	49.5	37.1	29.7	24.8	19.8	14.9	3.41	2.27	1.71	1.36
	C	50	1.12	83.2	66.5	55.4	41.6	33.3	27.7	22.2	16.6	3.82	2.55	1.91	1.53
	C	60	1.22	90.6	72.5	60.4	45.3	36.2	30.2	24.2	18.1	4.16	2.77	2.08	1.66
15	C	30	1.30	96.5	77.2	64.4	48.3	38.6	32.2	25.7	19.3	4.43	2.96	2.22	1.77
	C	40	1.50	111	89.1	74.3	55.7	44.6	37.1	29.7	22.3	5.12	3.41	2.56	2.05
	C	50	1.68	125	99.8	83.2	62.4	49.9	41.6	33.3	24.9	5.73	3.82	2.86	2.29
	C	60	1.84	137	109	91.1	68.3	54.6	45.5	36.4	27.3	6.27	4.18	3.14	2.51

Droplet size based on ASABE S572.1 standard.

Features	
Common Use	Acid Defoliants
Pattern	Tapered Flat Fan
Technology	Elliptical Orifice
Material	PVDF
Spray Angle	110°
Pressure Range	30-60 PSI [2-4 BAR]
Configuration	Tips
Part Numbers	
Tips 110°	
90-02F110	
90-03F110	
90-04F110	
90-05F110	
90-06F110	
90-08F110	
90-10F110	
90-15F110	

Metric Units

Tip Size	Droplet Size	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/Ha - 50 cm Spacing							
				7	8	10	12	15	20	25	30
02	F	2	0.65	111	98	78	65	52	39	31	26
	F	2.5	0.73	125	110	88	73	58	44	35	29
	F	3	0.80	137	120	96	80	64	48	38	32
	F	4	0.92	158	138	110	92	74	55	44	37
03	M	2	0.98	168	147	118	98	78	59	47	39
	F	2.5	1.10	189	165	132	110	88	66	53	44
	F	3	1.20	206	180	144	120	96	72	58	48
	F	4	1.39	238	209	167	139	111	83	67	56
04	M	2	1.31	225	197	157	131	105	79	63	52
	M	2.5	1.46	250	219	175	146	117	88	70	58
	M	3	1.60	274	240	192	160	128	96	77	64
	F	4	1.85	317	278	222	185	148	111	89	74
05	M	2	1.63	279	245	196	163	130	98	78	65
	M	2.5	1.83	314	275	220	183	146	110	88	73
	M	3	2.00	343	300	240	200	160	120	96	80
	M	4	2.31	396	347	277	231	185	139	111	92
06	M	2	1.96	336	294	235	196	157	118	94	78
	M	2.5	2.19	375	329	263	219	175	131	105	88
	M	3	2.40	411	360	288	240	192	144	115	96
	M	4	2.77	475	416	332	277	222	166	133	111
08	C	2	2.61	447	392	313	261	209	157	125	104
	C	2.5	2.92	501	438	350	292	234	175	140	117
	C	3	3.20	549	480	384	320	256	192	154	128
	C	4	3.70	634	555	444	370	296	222	178	148
10	C	2	3.27	561	491	392	327	262	196	157	131
	C	2.5	3.65	626	548	438	365	292	219	175	146
	C	3	4.00	686	600	480	400	320	240	192	160
	C	4	4.62	792	693	554	462	370	277	222	185
15	C	2	4.90	840	735	588	490	392	294	235	196
	C	2.5	5.48	939	822	658	548	438	329	263	219
	C	3	6.00	1029	900	720	600	480	360	288	240
	C	4	6.93	1188	1040	832	693	554	416	333	277

Droplet size based on ASABE S572.1 standard.



Acid-Resistant Lo-Drift 110°



The Lo-Drift's two-part construction includes a pre-orifice, which reduces the number of drift prone droplets and makes it ideal for broadcast application of acidic defoliants.

- Acid-resistant material construction
- Significantly reduces spray drift, widening the operational window
- Balanced droplet size for effective, on-target spray

US Units


Tip Size			Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre 20 inch nozzle spacing							GAL/1000ft ² 20 inch nozzle spacing				Features	
Tip Size	Droplet Size	4			5	6	8	10	12	15	20	4	5	6	7	Common Use	Acid Defoliants
03	C	15	0.18	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31	0.25	Pattern	Tapered Flat Fan
	C	20	0.21	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	0.72	0.48	0.36	0.29		
	C	30	0.26	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.89	0.59	0.44	0.35	Technology	Pre-Orifice
	M	40	0.30	22.3	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.02	0.68	0.51	0.41		
	M	50	0.34	25.2	20.2	16.8	12.6	10.1	8.4	6.7	5.0	1.16	0.77	0.58	0.46		
	M	60	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50		
04	M	70	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	Material	PVDF
	C	15	0.24	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.55	0.41	0.33		
	C	20	0.28	20.8	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.64	0.48	0.38	Spray Angle	110°
	C	30	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48		
	M	40	0.40	29.7	23.8	19.8	14.9	11.9	9.9	7.9	5.9	1.36	0.91	0.68	0.55	Pressure Range	15-70 PSI (1-5 BAR)
	M	50	0.45	33.4	26.7	22.3	16.7	13.4	11.1	8.9	6.7	1.53	1.02	0.77	0.61		
05	M	60	0.49	36.4	29.1	24.3	18.2	14.6	12.1	9.7	7.3	1.67	1.11	0.84	0.67	Configuration	Tips
	M	70	0.53	39.4	31.5	26.2	19.7	15.7	13.1	10.5	7.9	1.81	1.20	0.90	0.72		
	C	15	0.31	23.0	18.4	15.3	11.5	9.2	7.7	6.1	4.6	1.06	0.70	0.53	0.42	Part Numbers	
	C	20	0.35	26.0	20.8	17.3	13.0	10.4	8.7	6.9	5.2	1.19	0.80	0.60	0.48	Tips 110°	
	C	30	0.43	31.9	25.5	21.3	16.0	12.8	10.6	8.5	6.4	1.47	0.98	0.73	0.59	90LD03F110	
	C	40	0.50	37.1	29.7	24.8	18.6	14.9	12.4	9.9	7.4	1.71	1.14	0.85	0.68	90LD04F110	
06	M	50	0.56	41.6	33.3	27.7	20.8	16.6	13.9	11.1	8.3	1.91	1.27	0.95	0.76	90LD05F110	
	M	60	0.61	45.3	36.2	30.2	22.6	18.1	15.1	12.1	9.1	2.08	1.39	1.04	0.83	90LD06F110	
	M	70	0.66	49.0	39.2	32.7	24.5	19.6	16.3	13.1	9.8	2.25	1.50	1.13	0.90		
	VC	15	0.37	27.5	22.0	18.3	13.7	11.0	9.2	7.3	5.5	1.26	0.84	0.63	0.50		
	C	20	0.42	31.2	24.9	20.8	15.6	12.5	10.4	8.3	6.2	1.43	0.95	0.72	0.57		
	C	30	0.52	38.6	30.9	25.7	19.3	15.4	12.9	10.3	7.7	1.77	1.18	0.89	0.71		
06	C	40	0.60	44.6	35.6	29.7	22.3	17.8	14.9	11.9	8.9	2.05	1.36	1.02	0.82		
	C	50	0.67	49.7	39.8	33.2	24.9	19.9	16.6	13.3	9.9	2.28	1.52	1.14	0.91		
	C	60	0.73	54.2	43.4	36.1	27.1	21.7	18.1	14.5	10.8	2.49	1.66	1.24	1.00		
	C	70	0.79	58.7	46.9	39.1	29.3	23.5	19.6	15.6	11.7	2.69	1.80	1.35	1.08		

Droplet size based on ASABE S572.1 standard.

Metric

Metric				Application Rate L/Ha - 50 cm Spacing							
Tip Size	Droplet Size	Pressure (BAR)	Flow Rate (LPM)	KMH							
				7	8	10	12	15	20	25	30
03	C	1	0,69	118	104	83	69	55	41	33	28
	C	1,5	0,85	146	128	102	85	68	51	41	34
	C	2	0,98	168	147	118	98	78	59	47	39
	M	3	1,20	206	180	144	120	96	72	58	48
	M	4	1,39	238	209	167	139	111	83	67	56
	M	5	1,55	266	233	186	155	124	93	74	62
04	C	1	0,92	158	138	110	92	74	55	44	37
	C	1,5	1,13	194	170	136	113	90	68	54	45
	C	2	1,31	225	197	157	131	105	79	63	52
	M	3	1,60	274	240	192	160	128	96	77	64
	M	4	1,85	317	278	222	185	148	111	89	74
	M	5	2,07	355	311	248	207	166	124	99	83
05	C	1	1,15	197	173	138	115	92	69	55	46
	C	1,5	1,41	242	212	169	141	113	85	68	56
	C	2	1,63	279	245	196	163	130	98	78	65
	M	3	2,00	343	300	240	200	160	120	96	80
	M	4	2,31	396	347	277	231	185	139	111	92
	M	5	2,58	442	387	310	258	206	155	124	103
06	VC	1	1,39	238	209	167	139	111	83	67	56
	C	1,5	1,70	291	255	204	170	136	102	82	68
	C	2	1,96	336	294	235	196	157	118	94	78
	M	3	2,40	411	360	288	240	192	144	115	96
	C	4	2,77	475	416	332	277	222	166	133	111
	C	5	3,10	531	465	372	310	248	186	149	124

Droplet size based on ASABE S572.1 standard.



Misting Nozzles - F, HAF, PF, AFD, AF



The Hypro® range of misting nozzles produce a high percentage of droplets smaller than 50 microns making the sprays suitable for humidification and evaporative cooling. They are chemically resistant to also allow use with pesticides, disinfectants, and odor control agents as well as dust suppression.

- A variety of connection options match most applications
- Corrosion-resistant construction
- Strainers are included on many models to extend service life
- Anti-drip checks are standard in PF and AFD models

Flanged Tips: F-Flat Fan



Color	Spray Angle	US gal/hr @ pressure (PSI)					L/hr @ pressure (bar)					Part Number Nozzle Only
		40	60	75	100	150	3	4	6	8	10	
White	65	2.89	3.54	3.96	4.57	5.60	11,59	13,38	16,39	18,93	21,16	F65-005
Olive Green	80	4.00	4.90	5.48	6.32	7.75	16,04	18,52	22,68	26,19	29,28	F80-0067

Flanged Tips: HAF-Hollow Cone



Color	Spray Angle	US gal/hr @ pressure (PSI)					L/hr @ pressure (bar)					Part Number Nozzle Only
		40	60	75	100	150	3	4	6	8	10	
Light Gray	80	0.73	0.89	1.00	1.15	1.41	2,93	3,38	4,14	4,78	5,35	30HAF007-80
White	110	1.00	1.22	1.37	1.58	1.94	4,01	4,63	5,67	6,55	7,32	30HAF01110
Cream	65	1.00	1.22	1.37	1.58	1.94	4,01	4,63	5,67	6,55	7,32	30HAF01-65
Mint Green	80	1.43	1.75	1.96	2.26	2.77	5,73	6,62	8,10	9,36	10,46	30HAF01480
White	70	1.51	1.85	2.07	2.39	2.92	6,05	6,99	8,56	9,88	11,05	30HAF01570

Features	
Common Use	Cooling & Humidification
Pattern	Fan or Hollow Cone
Technology	Elliptical Orifice or Swirl
Material	Polyacetal
Spray Angle	65-110°
Pressure Range	40-150 PSI (3-10 BAR)
Configuration	Tips, Push-fit, or MNPT

1



2



3



Misting Nozzle Accessories for Flanged Tips

Reference Number	Part Number	Description
1	251032WH	3/8 inch BSP Retaining Nut White Polypropylene
1	251032GY	3/8 inch BSP Retaining Nut Gray Polypropylene
1	251032BL	3/8 inch BSP Retaining Nut Black Polypropylene
2	27302492	3/8 inch BSP x 1/4 inch MNPT Nylon Single Swivel Adapter Incorporating Shut-off
3	27302489	Double Swivel Adapter Incorporating Shut-off

Misting Nozzle Accessories

Push-fit Anti-drip Nozzle: PF-Flat Fan 3/8"



Color	Spray Angle	US gal/hr @ pressure (PSI)					L/hr @ pressure (bar)					Part Number with Cup Strainer
		40	60	75	100	150	3	4	6	8	10	
White	80	1.91	2.34	2.62	3.02	3.70	7,66	8,85	10,83	12,51	13,99	30PFCM002F80
Black	80	1.91	2.34	2.62	3.02	3.70	7,66	8,85	10,83	12,51	13,99	30PFCM002F80BL
White	80	2.89	3.54	3.96	4.57	5.60	11,59	13,38	16,39	18,93	21,16	30PFCM005F80
Black	80	2.89	3.54	3.96	4.57	5.60	11,59	13,38	16,39	18,93	21,16	30PFCM005F80BL

Push-fit Anti-drip Nozzle: PF-Hollow Cone 3/8"



Color	Spray Angle	US gal/hr @ pressure (PSI)					L/hr @ pressure (bar)					Part Number with Cup Strainer
		40	60	75	100	150	3	4	6	8	10	
White	80	0.91	1.11	1.25	1.44	1.76	3,65	4,21	5,16	5,96	6,66	30PFAF008-80
Black	80	0.91	1.11	1.25	1.44	1.76	3,65	4,21	5,16	5,96	6,66	30PFAF008-80BL
White	105	1.27	1.56	1.74	2.01	2.46	5,09	5,88	7,20	8,31	9,29	30PFAF013-105
Black	105	1.27	1.56	1.74	2.01	2.46	5,09	5,88	7,20	8,31	9,29	30PFAF013-105BL

1



2



3



Misting Nozzle Accessories for Push-Fit Anti-drip Nozzles

Reference Number	Part Number	Description
1	32195Q3269	Push-in Porous Plastic 250 Mesh Post Filter
2	141418	Barbed Tee 1/8 inch FNPT x 1/4 inch Barbs Black (6 mm)
2	10AEE930003	Barbed Tee 1/8 inch FNPT x 1/4 inch Barbs White (6 mm)
2	383818	Barbed Tee 1/8 inch FNPT x 3/8 inch Barbs Black (6 mm)
3	1212S18	Push-in Tee 1/2 inch SLIP x 1/2 inch SLIP x 1/8 inch (F)

1/8" MNPT Anti-drip Nozzle: AFD-Hollow Cone



Color	Spray Angle	US gal/hr @ pressure (PSI)					L/hr @ pressure (bar)					Part Number Nozzle Only	Part Number with Cup Strainer
		40	60	75	100	150	3	4	6	8	10		
Gray	80	0.72	0.88	0.99	1.14	1.39	2,89	3,34	4,09	4,72	5,28	301AFD0.7-80	CS301AFD0.7-80
Cream	105	1.20	1.47	1.64	1.90	2.32	4,81	5,55	6,80	7,85	8,78	301AFD1.2-105	CS301AFD1.2-105
Blue	100	1.68	2.06	2.30	2.66	3.25	6,74	7,78	9,53	11,01	12,31	301AFD1.6-100	-

1/8" MNPT Nozzle: AF-Hollow Cone



Color	Spray Angle	US gal/hr @ pressure (PSI)					L/hr @ pressure (bar)					Part Number Nozzle Only	Part Number with SS Cup Strainer	Part Number with SS Post Strainer	Part Number with Plastic Filter
		40	60	75	100	150	3	4	6	8	10				
White	65	0.48	0.59	0.66	0.76	0.93	1,92	2,22	2,72	3,14	3,51	301AF0.4-65	CS301AF0.4-65	301AFUSA0.5	PP301AF0.4-65
Gray	80	0.72	0.88	0.99	1.14	1.39	2,89	3,34	4,09	4,72	5,28	301AF0.7-80	CS301AF0.7-80	301AFUSA1.0	PP301AF0.7-80
White	80	0.72	0.88	0.99	1.14	1.39	2,89	3,34	4,09	4,72	5,28	301AF0.7-80W	CS301MNF-W	301MNF-W	PP301AF0.7-80W
Cream	105	1.20	1.47	1.64	1.90	2.32	4,81	5,55	6,80	7,85	8,78	301AF1.2-105C	CS301AF1.2-105C	301AFUSA2.0	PP301AF1.2-105C
Blue	100	1.68	2.06	2.30	2.66	3.25	6,74	7,78	9,53	11,01	12,31	301AF1.6-100	CS301AF1.6-100	301AFUSA3.0	PP301AF1.6-100
Yellow	70	5.00	6.12	6.85	7.91	9.68	20,05	23,15	28,35	32,74	36,61	301AF5.0-70	-	-	-

1



2



3



Misting Nozzle Accessories for 1/8" MNPT Nozzle

Reference Number	Part Number	Description
1	32100200	Cup Strainer 200 Mesh (Fits Rear of Threaded Misting Tips)
2	32PIFA250	Push-in 200 Mesh Post Strainer
3	27101612	3/8 inch BSP x 1/2 inch Wet Boom Body



Flat Fan Spray Tips - Even 80°

For Knapsack/Backpack Sprayers



The Hypro Even Flat Fan spray tip is an excellent choice for banding and directed post application. An even spray pattern should be used when banding chemicals.

- Commonly used with knapsack sprayers for precise control
- 80° angle distributes a medium fine spray evenly across the swath
- Mixed droplet spectrum is ideal for all targets
- One piece design

US Units

Tip Size	ASABE Droplet Size	Spray Angle	Spray Width 20 in height (in)	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre MPH			
						1	2	3	4
01	M	80	33	15	0.061	18.2	9.1	6.1	4.5
	F			30	0.086	25.7	12.8	8.6	6.4
	F			45	0.106	31.5	15.7	10.5	7.9
015	M	80	43	15	0.091	27.3	13.6	9.1	6.8
	F			30	0.129	38.5	19.3	12.8	9.6
	F			45	0.158	47.2	23.6	15.7	11.3
02	M	80	51	15	0.122	36.3	18.2	12.1	9.1
	F			30	0.172	51.4	25.7	17.1	12.8
	F			45	0.211	62.9	31.5	21.0	15.7
03	C	80	51	15	0.183	54.5	27.3	18.2	13.6
	C			30	0.259	77.1	38.5	25.7	19.3
	M			45	0.317	94.4	47.2	31.5	23.6

Droplet size based on ASABE S572.1 standard.

Metric Units


Tip Size	BCPC Droplet Size	ASABE Droplet Size	Spray Angle	Spray Width 50 cm height (m)	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/ha KM/H			
							2	3	4	5
01	F	M	80	0.8	1	0.231	139	92	69	55
	F	F			2	0.327	196	131	98	78
	F	F			3	0.400	240	160	120	96
015	F	M	80	0.8	1	0.346	208	139	104	83
	F	M			2	0.490	294	196	147	118
	F	F			3	0.600	360	240	180	144
02	M	M	80	0.8	1	0.462	277	185	139	111
	F	M			2	0.653	392	261	196	157
	F	F			3	0.800	480	320	240	192
03	M	C	80	0.8	1	0.693	416	277	208	166
	M	C			2	0.980	588	392	294	235
	F	M			3	1.200	720	480	360	288

BCPC CODING FINE MEDIUM COARSE

BCPC droplet size based on BCPC standard.

ASABE droplet size based on ASABE S572.1 standard.

Features	
Common Use	Knapsack
Pattern	Even Flat Fan
Technology	Elliptical Orifice
Material	Polyacetal
Spray Angle	80°
Pressure Range	15-45 PSI (1-3 BAR)
Configuration	Tip
Part Numbers	
Tips 80°	Caps (25 Pack)
E80-01	CAP00-01
E80-015	CAP00-015
E80-02	CAP00-02
E80-03	CAP00-03



DeflecTip and PoliJet 53°-127°

For Knapsack/Backpack Sprayers



The DeflecTip and PoliJet wide-angle flood fan tip creates a wide pattern at very low pressures while creating mainly medium and coarse droplets. It is well suited for sprayers using very low pressures, including manual sprayers.

- Different spray angles offer a choice of swath widths
- Low drift; coarse, even spray
- Large circular orifice reduces the chances of blocking

US Units: Deflect Tip

Tip Size	ASABE Droplet Size	Spray Angle	Spray Width 20 in height (in)	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre MPH			
						1	2	3	4
DT0.5	C	80	33	15.0	0.06	17.9	9.0	6.0	4.5
				30.0	0.09	25.4	12.7	8.5	6.3
				45.0	0.10	31.1	15.5	10.4	7.8
DT0.75	C	95	43	15.0	0.09	26.9	13.4	9.0	6.7
				30.0	0.13	38.0	19.0	12.7	9.5
				45.0	0.16	44.6	23.3	15.5	11.6
DT1.0	C	105	51	15.0	0.12	35.9	17.9	12.0	9.0
				30.0	0.17	50.7	25.4	16.9	12.7
				45.0	0.21	62.1	31.1	20.7	15.5
DT1.5	M	105	51	15.0	0.18	53.8	26.9	17.9	13.4
				30.0	0.26	76.1	38.0	25.4	19.0
				45.0	0.31	93.2	46.6	31.1	23.3

Droplet size based on ASABE S572.1 standard.

Metric Units: Deflect Tip

Tip Size	BCPC Droplet Size	ASABE Droplet Size	Spray Angle	Spray Width 50 cm height (m)	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/ha KM/H			
							2	3	4	5
DT0.5	F	C	80	0.8	1	0.23	137	91	68	55
					2	0.32	232	129	97	77
					3	0.39	284	158	118	95
DT0.75	C	C	95	1.1	1	0.34	205	137	103	82
					2	0.48	348	193	145	116
					3	0.59	426	237	178	142
DT1.0	C	C	105	1.3	1	0.46	328	182	137	109
					2	0.64	464	258	193	155
					3	0.79	569	316	237	190
DT1.5	C	M	105	1.3	1	0.68	492	274	205	164
					2	0.97	696	387	290	232
					3	1.18	853	474	355	284

BCPC CODING FINE MEDIUM COARSE

BCPC droplet size based on BCPC standard.

ASABE droplet size based on ASABE S572.1 standard.

US Units: PoliJet Tip

Tip Size	Spray Angle	Spray Width 20 in height (in)	Pressure (PSI)	Flow Rate (GPM)	Gallons per Acre MPH			
					1	2	3	4
AN0.6	53	20	15.0	0.16	47.2	23.6	15.7	11.8
			30.0	0.22	66.8	33.4	22.3	16.7
			45.0	0.27	81.8	40.9	27.3	20.4
AN1.2	90	39	15.0	0.32	94.4	47.2	31.5	23.6
			30.0	0.45	133.5	66.8	44.5	33.4
			45.0	0.55	163.5	81.8	54.5	40.9
AN1.8	113	59	15.0	0.48	141.6	70.8	47.2	35.4
			30.0	0.67	200.3	100.1	66.8	50.1
			45.0	0.82	245.3	122.6	81.8	61.3
AN2.4	127	79	15.0	0.63	188.8	94.4	62.9	47.2
			30.0	0.90	267.0	133.5	89.0	66.8
			45.0	1.10	327.0	163.5	109.0	81.8

Droplet size based on ASABE S572.1 standard.

Metric Units: PoliJet Tip

Tip Size	BCPC Droplet Size	ASABE Droplet Size	Spray Angle	Spray Width 50 cm height (m)	Pressure (BAR)	Flow Rate (LPM)	Application Rate L/ha KM/H			
							2	3	4	5
AN0.6	C	C	53	0.5	1	0.60	360	240	180	144
					2	0.85	509	339	255	204
					3	1.04	624	416	312	249
AN1.2	C	C	90	1.0	1	1.20	360	240	180	144
					2	1.70	509	339	255	204
					3	2.08	624	416	312	249
AN1.8	C	C	113	1.5	1	1.80	360	240	180	144
					2	2.55	509	339	255	204
					3	3.12	624	416	312	249
AN2.4	C	M	127	2.0	1	2.40	360	240	180	144
					2	3.39	509	339	255	204
					3	4.16	624	416	312	249

BCPC CODING FINE MEDIUM COARSE

BCPC droplet size based on BCPC standard.

ASABE droplet size based on ASABE S572.1 standard.

Spray Tip Caps and Adapters



Hypro® caps provide trouble-free spray tip installation and sealing on Hypro ProFlo nozzle bodies and several other common makes.

- Color-coded to ISO standards for nozzle flow to simplify tip selection and identification in the field
- Available in configurations optimized to fit a variety of spray tip geometries
- Caps for fan pattern tips automatically align tips for enhanced spray uniformity
- Includes seal indicated in chart below



	ISO Standard Fan	Deflect Tip No-offset	European Fan (Thick body)	Standard Round (Non-aligning)	Albuz® Round (Thick flange)	Shut-off	Threaded	
Fits:	ULD, GA, LD, VP, TR, OC, F, E, AXI, ADI, OCI	DT, PoliJet	AVI, AVI-TWIN, ESI, APG, APE	HCX, FCX DC/CR, HAF, APM flanged hose barbs	Ceramic Disc, ATR, HCA, TVI	Blank	1/4" FNPT	Std. Pack
Black	CAP00-20	CAP30-20	CAP01-20	CAP04-20	CAP05-20	CAP09-20	CAP10-20	25
Orange	CAP00-01	-	CAP01-01	CAP04-01	CAP05-01	-	-	25
Green	CAP00-015	-	CAP01-015	CAP04-015	CAP05-015	-	-	25
Yellow	CAP00-02	-	CAP01-02	CAP04-02	CAP05-02	-	-	25
Lilac	CAP00-025	-	CAP01-025	CAP04-025	CAP05-025	-	-	25
Blue	CAP00-03	-	CAP01-03	CAP04-03	CAP05-03	-	-	25
Dark Red	CAP00-035	-	-	-	-	-	-	25
Red	CAP00-04	-	CAP01-04	CAP04-04	CAP05-04	-	-	25
Brown	CAP00-05	-	CAP01-05	CAP04-05	CAP05-05	-	-	25
Gray	CAP00-06	-	CAP01-06	CAP04-06	CAP05-06	-	-	25
White	CAP00-08	-	CAP01-08	CAP04-08	CAP05-08	-	-	25
Light Blue	CAP00-10	-	CAP01-10	CAP04-10	-	-	-	25
Lime Green	CAP00-15	-	CAP01-15	CAP04-15	-	-	-	25
Included EPDM seal	22W11MF64	22W11MF64	22W11MF64	22W11MF64	22W11MF64	-	22W11MF64	-
Included EPDM o-ring	-	-	-	-	402105-030	-	-	-
Included Nitrile seal	-	-	-	-	-	65-BS205	-	-
Separate Viton seal	22W11MF64V	22W11MF64V	22W11MF64V	22W11MF64V	22W11MF64V	65-VBS205	22W11MF64V	-

Push-to-Connect Spray Caps

Push-to-Connect (PTC) Cap Part Numbers				Gasket Type	Gasket part Number
Type	Size	25 Std. Pack	1 Per Bag		
Caps	1/4"	4200-0060	BG-4200-0060	Std	22W11MF64
	3/8"	4200-0061	BG-4200-0061	Std	22W11MF64
	1/4"	4200-0062	BG-4200-0062	Split	10BG-1700-0255
	3/8"	4200-0063	BG-4200-0063	Split	10BG-1700-0255

Elbow and Double Adapters for Spray Tip Cap

Part number	Description
4200N-0017	45 Double w/ Gasket
4200N-0018	90 Elbow w/ Gasket
2270-0136	Cap Filler Disk

Hardi® and Jacto® Adapters

Part Number	Adapters For	Description
9950-0024	Hardi	10 pack of adapters for converting nozzle body to accept Hypro cap
9950-0027	Jacto	

Albuz® is a registered trademark of SAINT-GOBAIN SOLCERA, SAINT GOBAIN CERAMIQUES AVANCEES DESMARQUEST, CERAMIQUES TECHNIQUES DESMARQUEST, and SOCIETE DESMARQUEST ET CEC. Hardi is a registered trademark of Hardi International A/S. Jacto is a registered trademark of Jacto Inc. All other brand or product names are trademarks or registered trademarks of Pentair Ltd.



Spray Tip Cap – TwinCap



The Hypro® TwinCap is a simple, compact way of accommodating two spray tips back to back. This design allows you to apply the volume per acre you want, at the speed you want, without compromising spray quality.

- Improve control of plant diseases, insects, and difficult weeds
- Twin 30° angles improve canopy penetration
- Combined forward and backward angles enhance coverage on stems and leaves
- Holds any two standard dimension tips, including Hypro ULD, BD, GA, LD, ADI, VP, TR, AXI, Flat, and Even tips
- User can select tips for the most effective spray
- Available in standard Polyacetal or in Gray PVDF for acid sprays

Part Numbers	
TwinCaps, less tips	
152607TC	Standard TwinCap for agrochemicals
15Q2530TC	Gray Acid-resistant Twin cap for defoliants
VPTCAP	Standard TwinCap with one exit blanked for a single angled spray
16Q2530TC	Hardi TwinCap
Replacement Parts	
22W11MF64	Standard cap seal (A)
22W11MF64V	Viton cap seal for Acid (A)
65MN011X1.3	Standard tip o-ring seal (B)
65VBS0113-13	Viton tip o-ring seal for Acid (B)
30Q3834	Replacement VPTCAP plug

Tip Strainers



	Premium Flow Polypropylene Tip Strainer		Premium Flow Polypropylene Guardian & GuardianAir Twin Tip Strainer		Slotted Nylon Tip Strainer	Stainless Steel Tip Strainer with Check		
Part Number	TS01-50	TS01-100	TS02-50	TS02-100	TS03-25	32100530	32100550	32100510
ISO Color	Blue	Green	Blue	Green	Black	White	Blue	Green
Mesh	50	100	50	100	25	30	50	100

Packaged Part Numbers

4 Tips per pack: Add prefix "4PK-" (Ex. 4PK-TS01-50)

General Strainer Recommendations

Tip Flow Rate at 40 PSI (2.8 BAR)	Strainer Mesh	Example Fan Tip Size
Less than 0.10	200	005-0067
0.10-0.39	100	01-035
0.40-0.79	50	04-06
0.80-2.00	25	08-20

Spray Tip Calibration & Training Tools

Reference Number	Part Number	Description
1	9950-0022	34 oz. Calibration Jug
1	9950-0023	100 oz. Calibration Jug
2	9950-0031	Spray Tip Calibration pressure gauge
3	9950-0028	Water Sensitive paper (50 pack) 76x26mm (instructions included)
4	3040-0010	Hypro® Spray Center Demonstration Table with 115 VAC pump

1



2



3



175

4



Pump included

Spraying Solutions other than Water

Liquids that are more dense than water will flow through a spray tip more slowly than water. Solutions that are less dense than water will flow through a spray tip more quickly than water. Unless otherwise indicated, the performance tables in the spray tip section of this catalog show flow and application rates for water-based sprays. To use those tables when selecting tips to apply non-water sprays you must calculate an intermediate "look-up" application rate. To do this you will multiply your actual desired application rate by a conversion factor and then use the resulting "look-up" figure to select a tip from the water-based performance tables. The conversion factors listed on this page are based on typical values for common fertilizer solutions. For other spray solutions, you can calculate the conversion factor by taking the square root of the solution's specific gravity.

For easier tip selection using water and non-water sprays, use the SprayIT calculator online at: <http://SprayIT.hypropumps.com>.

U.S. Units

Density (lb/us gal)	Material	Specific Gravity	Conversion Factor
7.00		0.84	0.92
8.00		0.96	0.98
8.34	water	1.00	1.00
9.00		1.08	1.04
10.00		1.20	1.10
10.30	4-10-10	1.24	1.11
10.65	28-0-0	1.28	1.13
11.00		1.32	1.15
11.05	32-0-0	1.32	1.15
11.20	7-21-7	1.34	1.16
11.65	10-34-0	1.40	1.18
12.00		1.44	1.20

Metric

Density (kg/L)	Material	Conversion Factor
0.80		0.89
0.90		0.95
1.00	water	1.00
1.10		1.05
1.20		1.10
1.24	4-10-10	1.11
1.28	28-0-0	1.13
1.30		1.14
1.32	32-0-0	1.15
1.34	7-21-7	1.16
1.40	10-34-0	1.18
1.50		1.22

Example:

Your desired application rate of 28% Nitrogen fertilizer (28-0-0) is 30 US GPA.

Multiply 30 GPA by Conversion Factor 1.13 to find the converted look-up application rate of 33.9 GPA.

Select a spray tip that will apply 33.9 GPA of water-based spray. A spray tip that will apply 33.9 GPA of water will apply 30 GPA of 28-0-0 fertilizer solution.

Example:

Your desired application rate of 28% Nitrogen fertilizer (28-0-0) is 300 L/ha.

Multiply 300 L/ha X Conversion Factor 1.13 to find the converted look-up application rate of 339 L/ha.

Select a spray tip that will apply 339 L/ha of water-based spray. A spray tip that will apply 339 L/ha of water will apply 300 L/ha of 28-0-0 fertilizer solution.

Broadcast Application Formulas

US Standard

Application Formulas – US Standard

GPM – Gallons per minute (per spray tip)

GPA – Gallons per acre

GAL/1000FT² – Gallons per 1000 square feet

MPH – Miles per hour

- W
- Tip spacing (inches) for broadcast spraying
 - Spray width (inches) for single-tip band spraying or boomless spraying
 - Row spacing (inches) divided by the number of tips per row for directed spraying

$$\text{GPM} = \frac{\text{GPA} \times \text{MPH} \times \text{W}}{5,940}$$

$$\text{GPM} = \frac{\text{GAL}/1000\text{FT}^2 \times \text{MPH} \times \text{W}}{136}$$

$$\text{GPA} = \frac{5,940 \times \text{GPM}}{\text{MPH} \times \text{W}}$$

$$\text{GAL}/1000\text{FT}^2 = \frac{136 \times \text{GPM}}{\text{MPH} \times \text{W}}$$

Metric

Application Formulas – Metric

LPM – Litres per minute (per spray tip)

L/ha – Litres per hectare

Kmph – Kilometres per hour

- W
- Tip spacing (m) for broadcast spraying
 - Spray width (m) for single-tip band spraying or boomless spraying
 - Row spacing (m) divided by the number of tips per row for directed spraying

$$\text{LPM} = \frac{\text{L/ha} \times \text{Kmph} \times \text{W}}{600}$$

$$\text{L/ha} = \frac{600 \times \text{LPM}}{\text{Kmph} \times \text{W}}$$

Band Spraying

US Standard

$$\text{Volume of Chemical Solution Required in Gallons} = \frac{\text{Band Width (inches)}}{[\text{Band Width} + \text{Spacing between Bands}] \text{ (inches)}}$$

$$\text{Label Rate of Carrier (GPA)} \times \text{Field Area (Acres)}$$

Height Requirement – Band Spraying

Band Width	Height over Target 80°	Height over Target 110°
8"	5"	3"
10"	6"	4"
12"	7"	4"
15"	9"	5"
18"	11"	6"
20"	12"	7"
30"	18"	11"

To find GPA in the band, use the following equation:

$$\text{Band GPA} = \frac{5940 \times \text{GPM} \times \text{N}}{\text{MPH} \times \text{W}}$$

GPM needed per Tip:

$$\text{GPM} = \frac{\text{GPA} \times \text{MPH} \times \text{W}}{5940 \times \text{N}}$$

Treated Area Per Field For Banding Applications US Standard

Row Spacing in Inches	Band Width						
	7"	8"	10"	12"	15"	20"	24"
20"	0.350	0.400	0.500	0.600	0.75	1.000	
22"	0.318	0.363	0.454	0.545	0.681	0.909	
30"	0.233	0.266	0.333	0.400	0.500	0.666	0.800
36"	0.194	0.222	0.278	0.333	0.416	0.555	0.666
40"	0.175	0.200	0.250	0.300	0.375	0.500	0.600
48"	0.145	0.166	0.208	0.250	0.321	0.417	0.500

GPA = Gallons per acre

GPM = Gallons per minute

MPH = Speed in miles per hour

W = Band width in inches

N = Number of tips spraying each band

Metric

$$\text{Volume of Chemical Solution Required in Litres} = \frac{\text{Band Width (m)}}{[\text{Band Width} + \text{Spacing between Bands}] \text{ (m)}}$$

$$\text{Label Rate of Carrier (L/ha)} \times \text{Field Area (ha)}$$

Height Requirement – Band Spraying

Band Width	Height over Target 80°	Height over Target 110°
20 cm	12 cm	7 cm
25 cm	15 cm	9 cm
30 cm	18 cm	11 cm
40 cm	24 cm	14 cm
45 cm	27 cm	16 cm
50 cm	30 cm	18 cm
75 cm	45 cm	26 cm

To find the L/ha in the band, use the following equation:

$$\text{Band L/ha} = \frac{600 \times \text{LPM} \times \text{N}}{\text{Kmph} \times \text{W}}$$

LPM needed per Tip:

$$\text{LPM} = \frac{\text{L/ha} \times \text{Kmph} \times \text{W}}{600 \times \text{N}}$$

Treated Area Per Field For Banding Applications Metric

Row Spacing in cm	Band Width						
	18 cm	20 cm	25 cm	30 cm	38 cm	50 cm	60 cm
50 cm	0.360	0.400	0.500	0.600	0.760	1.000	
60 cm	0.300	0.333	0.417	0.500	0.633	0.833	1.000
75 cm	0.240	0.267	0.333	0.400	0.507	0.667	0.800
90 cm	0.200	0.222	0.278	0.333	0.422	0.556	0.667
100 cm	0.180	0.200	0.250	0.300	0.380	0.500	0.600
120 cm	0.150	0.167	0.208	0.250	0.317	0.417	0.500

L/ha = Litres per hectare

LPM = Litres per minute

Kmph = Speed in kilometres per hour

W = Band width in metres


N = Number of tips spraying each band

Accessories

ProFlo Nozzle Bodies and Accessories	Page 185
ProCap™ Tank Lids and Tank Accessories	Page 194
Cleanload™ Chemical Eductor	Page 198
Line Strainers	Page 200
Spray Guns	Page 202
Flowmeters	Page 205
Sprayer Control Valves	Page 206
Ball Valves	Page 210
Gauges	Page 211
Universal Flange Clamps, Gaskets and Fittings.....	Page 214
Fittings, Cable Ties, Hose Clamps & Sealant	Page 216

DUO REACT Nozzle Bodies

Compact and Economical Twin Valve Nozzle Body

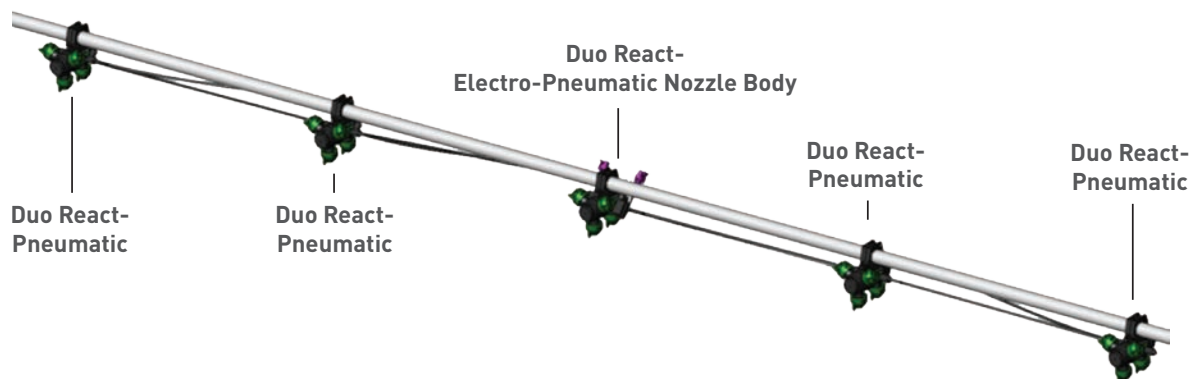

FEATURES

- A single and 4-way nozzle body incorporated into one compact unit
 - Eliminates the need for twin lines or “back to back” configurations
 - Simple operation, twin valves allow either or both nozzles to spray
- Allows the operator to select different nozzle combinations from the cab with a controller
- Compact design allows for easy integration into many boom designs
- Pneumatic only or electro-pneumatic actuated valve options
 - Electro-pneumatic body can be used in place of a section control valve to control up to 7 pneumatic Duo React nozzle bodies
- Available with hinged clamps 1/2", 3/4", 1", 20mm and 25mm



Duo React Electro-Pneumatic Twin Valve Nozzle Bodies for Wet Boom

Seal Options/ Housing Reference	(to clamp on) Pipe Size				
	1/2"	3/4"	1"	20 mm	25 mm
Viton/Green	4214-2502V	4214-2503V	4214-2504V	4214-2507V	4214-2508V



Duo React Pneumatic Twin Valve Nozzle Bodies for Wet Boom

Seal Options/ Housing Reference	(to clamp on) Pipe Size				
	1/2"	3/4"	1"	20 mm	25 mm
Viton/Green	4214-1502V	4214-1503V	4214-1504V	4214-1507V	4214-1508V

Duo React Spare Parts and Tool

Part Number	Description
3430-0840V	O-ring and piston sub-assembly kit
3021-0006	Cap removal service wrench

PROFLO Nozzle Bodies

Nozzle Bodies with the Highest Flow Rates in the Industry




FEATURES

- Three turret styles for an easy change of spray tips: single, 3-way, and 5-way
- Provides lowest pressure drop at any given flow in the industry
- 2.6 gpm (9.84 LPM) with a 5 psi (.345 BAR) pressure drop
- Available in wet or dry boom versions
- Positive shutoff between each spray position
- Custom logos available upon request (minimum quantities apply)

BENEFITS

- Designed to deliver the highest flow rates across the spraying pressure range
 - Unique DCV (diaphragm check valve) design reduces restrictions in the flow path, enabling 2.6 gpm (9.8 lpm) with a 5 psi (0.34 bar) pressure drop through the nozzle
 - Supports faster field speeds with the same coverage and supports direct fertilizer application through the nozzle body DCV flow path
- Turret-indexing design provides improved consistency and reliability throughout the life of the nozzle body – eliminating free spinning and seizing problems seen on competitive nozzle bodies
- Bayonet style attachment allows for automatic spray alignment using flat fan spray tips
- Compact design makes mounting easier with less potential interference with the spray boom structure
- ProFlo nozzle bodies come standard with an 8 psi (.55 bar) diaphragm check valve. 4 psi (.27 bar), 12 psi (.82 bar), 20 psi (1.37 bar), and 25 psi (1.72 bar) checks are available as options

ProFlo Nozzle Body Performance Curve

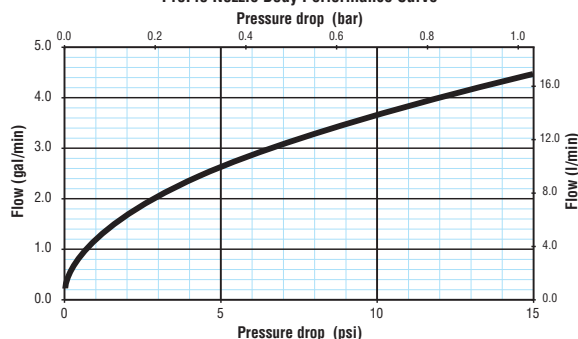

3 and 5-Way Nozzle Bodies for Wet Boom (no tab for boom clamp)

Seal Option/ Housing Reference	Turret Options	(to clamp on) Pipe Size				
		1/2"	3/4"	1"	20mm	25mm
EPDM/Red	3	4223N-B322	4223N-B323	4223N-B324	4223N-B327	4223N-B328
	5	4223N-B522	4223N-B523	4223N-B524	4223N-B527	4223N-B528
Viton/Green	3	4223N-B322V	4223N-B323V	4223N-B324V	4223N-B327V	4223N-B328V
	5	4223N-B522V	4223N-B523V	4223N-B524V	4223N-B527V	4223N-B528V

Sold in Quantities of 100; Sold as single units through HYPRO-EU only (Cambridge,UK)

For Individual Bags, Add Suffix -00 [i.e.: 4223N-B322-00]

ProStop Valve in place of DCV - Add suffix "PS" [i.e. 4223N-B322PS]



Triple Nozzle Bodies for Wet Boom

Seal Option/ Housing Reference	Part Number	Description
EPDM/Red	4222N-B322	1/2" split clamp
	4222N-B323	3/4" split clamp
	4222N-B324	1" split clamp



Single Drop Nozzle Body for Wet Boom

Seal Option/ Housing Reference	(to clamp on) Pipe Size				
	1/2"	3/4"	1"	20mm	25mm
EPDM/Red	4221N-B122	4221N-B123	4221N-B124	4221N-B127	4221N-B128
Viton/Green	4221N-B122V	4221N-B123V	4221N-B124V	4221N-B127V	4221N-B128V

Acid resistant polypropylene available with 1" clamp and EPDM Seal. part number: 402265P

1/4" FNPT Outlet- Substitute B with F [i.e.: 4221N-F122]

Sold in Quantities of 100; Sold as single units through HYPRO-EU only (Cambridge,UK)

For Individual Bags, Add Suffix -00 [i.e.: 4221N-B122-00]

ProStop Valve in place of DCV - Add suffix "PS" [i.e. 4221N-B122PS]

PROFLO Nozzle Bodies



3 & 5-way Nozzle Bodies with Tab for Boom Clamp

Seal Option/ Housing Reference	Turret Options	(to clamp on) Pipe Size				
		1/2"	3/4"	1"	20mm	25mm
EPDM/Red	3	4243N-B322	4243N-B323	4243N-B324	4243N-B327	4243N-B328
	5	4243N-B522	4243N-B523	4243N-B524	4243N-B527	4243N-B528
Viton/Green	3	4243N-B322V	4243N-B323V	4243N-B324V	4243N-B327V	4243N-B328V
	5	4243N-B522V	4243N-B523V	4243N-B524V	4243N-B527V	4243N-B528V

Sold in Quantities of 100; Sold as single units through HYPRO-EU only (Cambridge, UK)

For Individual Bags, Add Suffix -00 (i.e.: 4243N-B322-00).

ProStop Valve in place of DCV - Add suffix "PS" (i.e. 4243N-B322PS)



3 & 5-way Nozzle Bodies with Tab for Boom Clamp and Hose Barb for Dry Boom

Seal Option/ Housing Reference	Turret Options	3/4" (19 mm) Single Ended HB	3/4" (19 mm) Double Ended HB	1" (25 mm) Single Ended HB	1" (25 mm) Double Ended HB
EPDM/Red	3	4263N-B323S	4263N-B323D	4263N-B324S	4263N-B324D
	5	4263N-B523S	4263N-B523D	4263N-B524S	4263N-B524D
Viton/Green	3	4263N-B323SV	4263N-B323DV	4263N-B324SV	4263N-B324DV
	5	4263N-B523SV	4263N-B523DV	4263N-B524SV	4263N-B524DV

Sold in Quantities of 100.

For Individual Bags, Add Suffix -00 (i.e.: 4263N-B323S-00).



Dry Boom Adapters for Wet Boom Nozzle Bodies

Part Number	Type	Clamp Size	Hose Barb	
			US Units	Metric Units
4200-0111N	Single	1/2" Pipe	1/2"	13 mm
4200-0112N	Single	3/4" Pipe	3/4"	19 mm
4200-0113N	Single	3/4" Pipe	1"	25 mm
4200-0114N	Single	1" Pipe	3/4"	19 mm
4200-0115N	Single	1" Pipe	1"	25 mm
4200-0211N	Double	1/2" Pipe	1/2"	13 mm
4200-0212N	Double	3/4" Pipe	3/4"	19 mm
4200-0213N	Double	3/4" Pipe	1"	25 mm
4200-0214N	Double	1" Pipe	3/4"	19 mm
4200-0215N	Double	1" Pipe	1"	25 mm



Hose Barb Triple Nozzle Bodies-with DCV

Seal Options/ Housing Reference	Single hose barb P/N	Double hose barb P/N	Triple hose barb P/N	Hose ID	
				US Units	Metric Units
EPDM/Red	4242N-B322S	4242N-B322D	4242N-B322T	1/2"	13 mm
	4242N-B323S	4242N-B323D	4242N-B323T	3/4"	19 mm

4242N-B300-Provides 1/4" MNPT Inlet



Hose Barb Dry Boom Nozzle Bodies-with DCV

Seal Options/ Housing Reference	Single hose barb P/N	Double hose barb P/N	Triple hose barb P/N	Hose ID	
				US Units	Metric Units
EPDM/Red	4241N-B121S	4241N-B121D	4241N-B121T	3/8"	10 mm
	4241N-B122S	4241N-B122D	4241N-B122T	1/2"	13 mm
	4241N-B123S	4241N-B123D	4241N-B123T	3/4"	19 mm

Add Prefix "BG-" for 1 part per retail bag.

Nozzle Bodies



Hose Barb Dry Boom Nozzle Bodies-with Top-Mounted DCV

Seal Options/ Housing Reference	Single hose barb P/N	Double hose barb P/N	Hose ID	
			US Units	Metric Units
EPDM/Red	4240N-B121S	4240N-B121D	3/8"	10 mm
	4240N-B122S	4240N-B122D	1/2"	13 mm
	4240N-B123S	4240N-B123D	3/4"	19 mm

Add Prefix "BG-" for 1 part per retail bag.



Single Nozzle Bodies with DCV

Seal Options/ Housing Reference	1/4" MNPT x 1/4" FNPT			1/4" MNPT x Bayonet		11/16" UNF x Bayonet	3/8" (10 mm) HB x Bayonet
	4 PSI (.28 BAR)	8 PSI (.55 BAR)	25 PSI (1.72 BAR)	4 PSI (.28 BAR)	8 PSI (.55 BAR)	8 PSI (.55 BAR)	8 PSI (.55 BAR)
EPDM/Red	4240N-F110	4240N-F120	4240N-F150	4240N-B010	4240N-B020	4241N-B120U	QT14-1-NDC
Viton/Green	4240N-F110V	4240N-F120V	4240N-F150V	4240N-B010V	4240N-B020V	-	-



Hose Barb Dry Boom Nozzle Bodies-No DCV

Single hose barb P/N	Double hose barb P/N	Triple hose barb P/N	Hose ID	
			US Units	Metric Units
4231N-B101S	4231N-B101D	4231N-B101T	3/8"	10 mm
4231N-B102S	4231N-B102D	4231N-B102T	1/2"	13 mm
4231N-B103S	4231N-B103D	4231N-B103T	3/4"	19 mm



Wet Boom Single Nozzle Bodies-No DCV

Single hose barb P/N	Hose ID
4201N-B102	1/2" clamp
4201N-B103	3/4" clamp
4201N-B104	1" clamp

Add Prefix "BG-" for 1 part per retail bag.



Replacement Nozzle Body Stem Seals

Part Number	Description/Material
1723-0142	10 mm Wet Boom Stem Seal-EPDM
1721-0220	10 mm Wet Boom Stem Seal-Viton



Replacement Seal/O-ring Kit ProFlo Body

Part Number	Description/Material
3430-0754	Contains all internal seals/EPDM
3430-0754V	Contains all internal seals/Viton®



Screw, Nut & Stem O-ring Kit

Part Number	Description/Material
3430-0755	Contains replacement screw, nut and stem o-ring/EPDM
3430-0755V	Contains replacement screw, nut and stem o-ring/Viton

EXPRESS Nozzle Body End Caps and Fittings

Conventional boom designs trap air in the boom causing a delay from the close signal to when spray actually stops. Pentair's Hypro® Express nozzle body end caps include a passive feature that eliminates the trapped air by allowing the air to escape through the nozzle body. When the boom is completely filled with liquid, the nozzle body's diaphragm check valve (DCV) activation time is greatly improved, by as much as 85%. The Express nozzle body end cap supports today's practice of Precision Agriculture by enabling standard nozzle bodies to have much quicker reaction times in response to GPS boom shut-off control signals, turning off spray quickly and decisively on overlaps, end rows, and boundary areas.

The Express nozzle body end caps also create a much cleaner look by terminating the pipe at the last nozzle body, while reducing pipe material by as much as 10%. Using nozzle body end caps will contribute to better boom hygiene by eliminating the 'dead-end' termination of pipe that allows chemical residue to build up and air to accumulate. The additional option of a removable end plug allows easy access for boom cleanout to flush debris from boom pipe.

Terminates the pipe at the last nozzle body, eliminating six inches of dead-ends from each pipe end and reducing pipe costs by 10%

Creates a cleaner looking plumbing system by eliminating the need for an extra fitting at the end of the boom

Optional cleanout port for easy boom flushing

Eliminates trapped air from the boom by allowing air to escape through the nozzle body, reducing nozzle turn-off time by 85%

Express Nozzle Body End Cap



Part Number (Carton Qty: 100)	Part Number (1 per Bag)	Description	Nozzle Body Type
7433-3316	BG-7433-3316	1" Express™ fitting with nozzle body end cap allows trapped air to escape through the nozzle body and includes removable plug for boom cleanout.	10 mm Stem
7433-3314	BG-7433-3314		13 mm Stem

Express Nozzle Body End Cap Retrofit Kit




Part Number	Description	Cutting Jig Material	Nozzle Body Type	Boom Material
3410-0039	Kit includes machinist-quality drill bit, drilling and cutting jig for 1" pipe, Emery cloth, and instructions to retrofit conventional wet boom spray pipe for Express nozzle body end caps.	Polypropylene	10 mm Stem	Polypropylene
3410-0044		Aluminum	10 mm Stem	Metalic
3410-0043		Aluminum	13 mm Stem	Metalic

Express Wet Boom Fittings

Part Number (Carton Qty: 25)	Part Number (1 per Bag)	Description	Ref #
7433-2502	BG-7433-2502	Express Fitting X 1" Universal Flange Straight	1
7433-2503	BG-7433-2503	2 Express Fitting X 1" Universal Flange Tee	2
7433-2608	BG-7433-2608	Express Fitting X 1" Hose Barb Straight	3
7433-2610	BG-7433-2610	Express Fitting X 1" Hose Barb Elbow Vertical	4
7433-2601	BG-7433-2601	Express Fitting X 1" Hose Barb Elbow Horizontal	5
7433-2613	BG-7433-2613	Express Fitting X 1" Male Cam Lock Straight	6
	UFG0100E	1" EPDM Universal Flange Gasket provides high quality sealing for flanged fittings	7

For high quality sealing to flange fitting, use Hypro's Universal Flange Gasket.

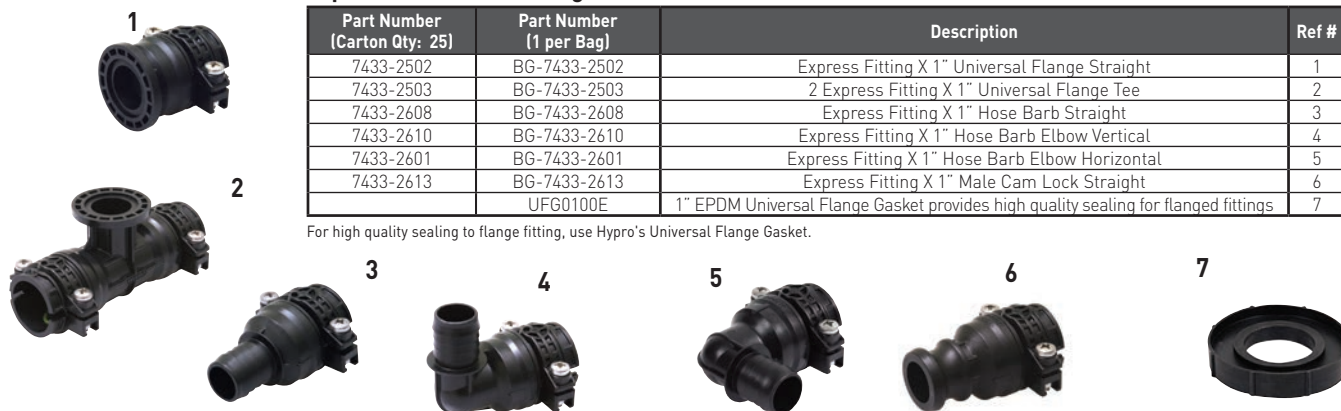

Nozzle Body Shut-Off Controls



PROSTOP

- Rapidly and accurately start and stop nozzle flow
- Compatible with convenient push-connect air fittings and tube
- Connect one air circuit per boom section
- Air pressure activates spray, spring closure provides positive shut-off for transport and storage
- Durable and chemically-resistant polypropylene, PVDF, and EPDM components
- A 40 psi (3 bar) pneumatic signal controls a maximum spray pressure of 150 psi (10 bar)
- ProStop can be specified in place of the diaphragm check valve (DCV) on select ProFlo nozzle bodies. Add suffix "PS" to nozzle body part number shown.

Air-actuated On/Off Nozzle Control Valve

Part Number	Description
PS3/4F-PN	PROSTOP valve assembly



12 VDC Electric Solenoid Valve

Part Number	Description
2525-0035	Scorpio Solenoid Valve



Replacement Check Valve (DCV) includes Flynut, Housing and Spring

Housing Reference	Spring Pressure Plunger Reference Color				
	4 PSI (.28 BAR) Orange	8 PSI (.55 BAR) Black	12 PSI (.83 BAR) Yellow	20 PSI (1.38 BAR) Gray	25 PSI (1.72 BAR) Blue
Red	4200-0010	4200-0020	4200-0030	4200-0040	4200-0050
Green	4200-0010V	4200-0020V	4200-0030V	4200-0040V	4200-0050V

Red housing indicates for use with EPDM Seals. Green housing indicates for use with Viton Seals.
Note: Diaphragms are sold separately.



Replacement Diaphragm Seal Options for check valves

Option	Part Number	Color Reference
EPDM	4200-0004E	Black
Viton®	4200-0004V	Green



Positive Shut-off

Part Number	Description
4200-0025	8 PSI (.55 bar) DCV with positive shut-off

Nozzle Body Accessories

Push-to-Connect Caps



Push-to-Connect (PTC) Cap Part Numbers				Gasket Type	Gasket part Number
Type	Size	25 Std. Pack	1 Per Bag		
Caps	1/4"	4200-0060	BG-4200-0060	Std	22W11MF64
	3/8"	4200-0061	BG-4200-0061	Std	22W11MF64
	1/4"	4200-0062	BG-4200-0062	Split	10BG-1700-0255
	3/8"	4200-0063	BG-4200-0063	Split	10BG-1700-0255

Includes gasket.

Push-to-Connect Nozzle Bodies



Push-to-Connect (PTC) Nozzle Body Part Numbers					
Type	DCV	4 PSI (.28 BAR)		8PSI (.55 BAR)	
	Size	25 Std. Pack	1 Per Bag	25 Std. Pack	1 Per Bag
PTC to Bayonet	1/4"	4247N-B119	BG-4247N-B119	4247N-B129	BG-4247N-B129
	3/8"	4247N-B111	BG-4247N-B111	4247N-B121	BG-4247N-B121
PTC to PTC	1/4"	4247N-C119	BG-4247N-C119	4247N-C129	BG-4247N-C129
	3/8"	4247N-C111	BG-4247N-C111	4247N-C121	BG-4247N-C121

Wet Boom Blanks



Part Number	Material	Description
400059	Nylon	3/4" Pipe
400069	Nylon	1" Pipe
400059P*	Polypropylene	3/4" Pipe
400069P*	Polypropylene	1" Pipe

*Comes standard with Viton o-ring.

Series 404 Swivel and Threaded-Swivel Nozzle Bodies



Part Number	Description
4200N-0020	Single Swivel 1/4" FNPT X Quick Attach
4200N-0021	Double Swivel 1/4" FNPT X 2 Quick Attach
4200N-0023	Single 1/4" FNPT X 11/16" - 16UN(M)
4200N-0024	Double 1/4" FNPT X 11/16" - 16UN(M)
4200N-0025	Red Retaining Cap 11/16" - 16UN(F)
4200N-0026	Black Retaining Cap 11/16" - 16UN(F)

Hose Drops




Part Number	Length		Description Outlet, Inlet
	US Units	Metric Units	
430001	15"	38.1 cm	1/4" NPT, 11/16" - 16UN(M)
430002	24"	60.9 cm	1/4" NPT, 11/16" - 16UN(M)
430201	15"	38.1 cm	1/4" NPT, Quick Attach Fitting
430202	24"	60.9 cm	1/4" NPT, Quick Attach Fitting
430201V	15"	38.1 cm	1/4" NPT, Quick Attach Fitting with Viton
430202V	24"	60.9 cm	1/4" NPT, Quick Attach Fitting with Viton

Ball Nozzle Holders



Part Number	Ball Thread	Attach Method
40867BN	1/4" FNPT	Handlock Clamp 1" pipe
40868BN	1/4" FNPT	Handlock Clamp 1-1/4" pipe
4081B0N	1/4" FNPT	Threaded 1/4" MNPT

Nozzle Body Accessories

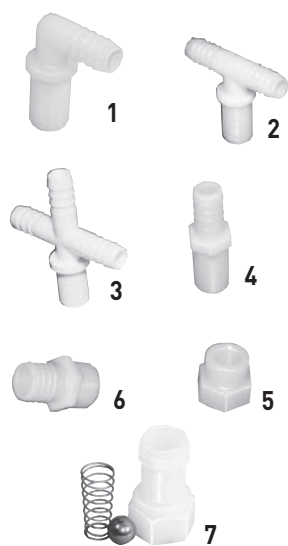


11/16" UN Nozzle Bodies

Reference Number	Standard Pack	Description	Nylon Part Number	Poly Part Number
		US Units		
1	25	11/16" - 16UN(M) X 1/4" [6 mm] HB Elbows	NTL14	3NTL14
1	25	11/16" - 16UN(M) X 3/8" [10 mm] HB Elbows	NTL38	3NTL38
1	25	11/16" - 16UN(M) X 1/2" [13 mm] HB Elbows	NTL12	3NTL12
1	25	11/16" - 16UN(M) X 5/8" [16 mm] HB Elbows	NTL58	3NTL58
1	25	11/16" - 16UN(M) X 3/4" [19 mm] HB Elbows	NTL34	3NTL34
2	25	11/16" - 16UN(M) X 3/8" [10 mm] HB Tees	NTT38	3NTT38
2	25	11/16" - 16UN(M) X 1/2" [13 mm] HB Tees	NTT12	3NTT12
2	25	11/16" - 16UN(M) X 5/8" [16 mm] HB Tees	NTT58	3NTT58
2	25	11/16" - 16UN(M) X 3/4" [19 mm] HB Tees	NTT34	3NTT34
3	25	11/16" - 16UN(M) X 3/8" [10 mm] HB Crosses	T38C	3T38C
3	25	11/16" - 16UN(M) X 1/2" [13 mm] HB Crosses	T12C	3T12C
3	25	11/16" - 16UN(M) X 3/4" [19 mm] HB Crosses	T34C	3T34C
4	25	11/16" - 16UN(M) X 3/8" [10 mm] HB Nozzle Shanks Straight	38D	338D
4	25	11/16" - 16UN(M) X 1/2" [13 mm] HB Nozzle Shanks Straight	3812D	33812D
5	25	11/16" - 16UN(F) X 1/4" [6 mm] FNPT Female Spray Tip Adapter	NF1614	3NF1614
6	25	11/16" - 16UN(M) X 1/4" [6 mm] MNPT Nipples	NB1614	3NB1614
6	25	11/16" - 16UN(M) X 1/2" [16 mm] MNPT Nipples	NB1612	3NB1612
7	25	3/8" FNPT X 11/16" - 16UN(M) Ball Check Valve for nozzle fittings (10 PSI/.69 BAR)	NBC10	-----

Includes B12/3B12 nut.

Add Prefix "BG-" for 1 part per retail bag.


Add Prefix "5BG-" for 5 parts per retail bag.



11/16" UN Nozzle Body Cap and Nut

Reference Number	Standard Pack	Description	Nylon Part Number	Poly Part Number
1	25	11/16" - 16UN(F) Nozzle blank cap	3942*	33942*
2	25	11/16" - 16UN(F) Nozzle cap for tip/barb	8027*	38027*
3	25	1/4" [6 mm] HB for 8027/38027 cap	K8414	3K8414
3	25	3/8" [10 mm] HB for 8027/38027 cap	K8438	3K8438
3	25	1/2" [13 mm] HB for 8027/38027 cap	K8412	3K8412
4	25	11/16" - 16UN jamb nut	B12*	3B12*

*Fits all nozzle fittings with 11/16" male straight thread.



Cobra Clip Boom Pipe Mounts


Part Number	Ref.	Description
0113434307	A	3/4" or 25mm nominal boom pipe mount
0113434308	B	1" or 32mm nominal boom pipe mount w/ keep strap
01134343010	B	1-1/2" or 40mm nominal boom pipe mount w/ keep strap

Black Polypropylene Boom Pipe (Undrilled) - Schedule 80 - 20 ft Sections



Part Number	Nominal Pipe Size	Pipe Length		Wall Thickness	Wall Tolerance	Outside Diameter		Max. Operating Pressure @ 73° F/22.8° C	
		US Units	Metric Units			US Units	Metric Units	PSI	BAR
8034-F-00PP	3/4"	20 ft	6.1 m	0.154	+0.020	1.050	26.7 mm	270	18.6
801-F-00PP	1"	20 ft	6.1 m	0.179	+0.021	1.315	33.4 mm	250	17.2
80112-F-00PP	1-1/2"	20 ft	6.1 m	0.220	+0.021	1.905	48.4 mm	200	13.8

Nozzle Body Accessories & Foam Marker

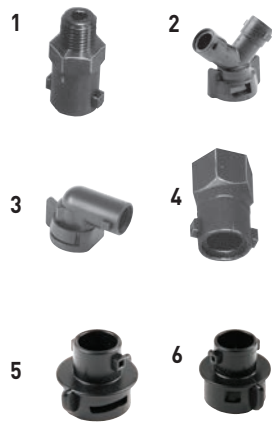

Quick Fitting Adapters

Reference #	Part #	Description	Packaging
-	4200-0015N	1/4" BSP x Quick Attach	None
1	4200-0016N	1/4" MNPT x Quick Attach	None
2	4200N-0017	45° Double Elbow w/Gasket	10/ Bag, Priced Individually
3	4200N-0018	90° Elbow x Quick Attach	10/ Bag, Priced Individually
4	4200-0019	1/4" FNPT x Quick Attach	None
5	9950-0024	Hardi* Adapter	10/ Bag, Priced Per Bag
6	9950-0027	Jacto** Adapter	10/ Bag, Priced Per Bag
7	CPV007	3/8" HB x 1/4" FNPT w/ Boom clamp	None
8	BG-400275N	1/4" FNPT x Quick Attach	1/Bag

* Hardi is a registered trademark of Hardi International A/S

** Jacto is a registered trademark of Jacto, Inc.

Vari-Spacing Clamps



Part Number	Material	Piping/Tubing O.D.
413003*	Steel	3/4" [26.7 mm] Round Pipe [1.050"]
413004*	Steel	1" [33.5 mm] Round Pipe [1.315"]
413005*	Steel	1-1/4" [42 mm] Round Pipe [1.660"]
413013	Steel	3/4" [19 mm] Square Tubing
413014	Steel	1" [25 mm] Square Tubing
413015	Steel	1-1/4" [32 mm] Square Tubing
413016	Steel	1-1/2" [38 mm] Square Tubing
413018	304 Stainless Steel	1-1/2" [38 mm] Square Tubing

* By pipe, dimensions refer to I.D. (inner diameter).

Add Prefix "BG-" for 1 part per retail bag


ProFlo Dry Boom Clamps with Slot for Easy Assembly- Boxes of 100



Part Number	Material	Piping/Tubing O.D.
1520-1075	zinc plated steel	3/4" [14 mm] square tubing
1520-1100	zinc plated steel	1" [25 mm] square tubing
1520-1125	zinc plated steel	1-1/4" [32 mm] square tubing
1520-1150	zinc plated steel	1-1/2" [38 mm] square tubing
1520-1075SS	304 stainless steel	3/4" [19 mm] square tubing
1520-1100SS	304 stainless steel	1" [25 mm] square tubing
1520-1125SS	304 stainless steel	1-1/4" [32 mm] square tubing
1520-1150SS	304 stainless steel	1-1/2" [38 mm] square tubing

Add Prefix "BG-" for 1 part per retail bag

Steel Boom Clamps for use with 11/16" Nozzle Bodies



Part Number	Description
BC34R*	3/4" [26.7 mm] Round Pipe
BC100R*	1" [33.4 mm] Round Pipe
BC100	1" [25 mm] Square
BC114	1-1/4" [32 mm] Square

* Dimensions refer to I.D. (inner diameter).

Foam Marker

Part Number	Part Number	Description
520004	52520005	Foam Marker System

Available for order through HYPRO -EU only (Cambridge, UK)

- Save money and increase efficiency by avoiding costly misses and overlaps while spraying
- Covers up to 500 acres (200 hectares) with only a 5-gallon (19 litre) tank
- No pre-mixing required - foam is made in the drop assembly at the end of the boom
- Fits any crop sprayer, turf sprayer or seeding machine (extra hose required for booms longer than 60 feet (18 m)- part # 520000-751)
- Electro-pneumatically operated, requiring a 12-volt DC 6 Amp power supply
- 108' (33 m) dual liquid/air hose with thermoformed polystyrene covering for UV protection





PROCAP Tank Lids



ProCap tank lids feature a rugged design that is easy to use and provides a safe and secure cover for a variety of tanks. All lids are made from sturdy polypropylene material to withstand harsh chemicals and ultraviolet rays.

Increased Labyrinth Breather capacity supports higher tank filling rates

Labyrinth Breather

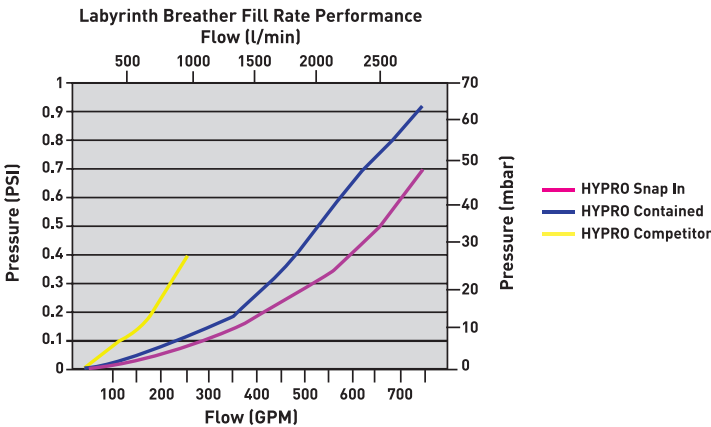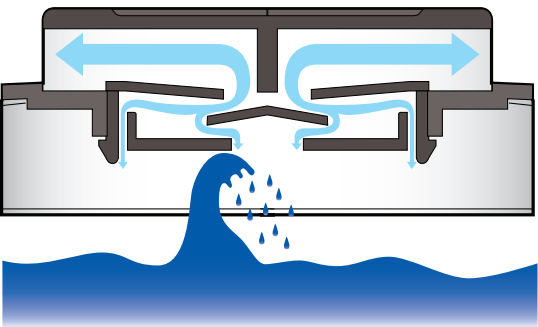


As depicted in the graph above, the Hypro Labyrinth Breather consistently performs at a higher fill rate and lower pressure than the typical competitor.



Female-Threaded Lids with Gasket

Lid Size	Breather Type	Thread Type	Part Number
4"	Diaphragm	Universal	354230
6"	None	Universal	TL06-0003
6"	Spring	Universal	TL06-0004

- Easily replaces an old or lost lid
- Available as a solid lid or with a breather
- Universal thread has larger diameter to fit any tank thread

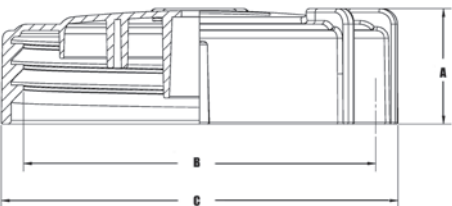

Female-Threaded Tank Lid Dimensions





Part Number	A IN(MM)	B IN(MM)	C IN(MM)
354230	1.44 [36.5]	4.17 [106]	4.8 [122]
TL06-0003	1.85 [47]	5.66 [144]	6.35 [161]
TL06-0004	1.85 [47]	5.66 [144]	6.35 [161]

PROCAP Tank Lids

Male-Threaded Tank Lids and Ring Assemblies • Available as a solid lid or with a labyrinth breather



Breather Type	6"	8"	12"	16"	22"
Solid Lid/Ring	3522100-1	3522120-1	3522140-1	3522160-1	352180-1
Labyrinth Lid/Ring	-	3522221-1	3522040-1	3522060-1	352080-1
Solid Lid	3522100	3522120	3522140	3522160	352180
Lid with Labyrinth	3522000	3522221	3522040	3522060	352080
Ring - Standard	350401	3502420	3502440	3502460	350480
Ring with C Gasket	-	TLP-0046	350640	350660	350680
Sealing Gasket Between Tank & Ring	-	350420-020	350440-020	350460-020	350480-020
Wiper Gasket Between Lid & Ring	352000-020	3522120-020	3522140-020	3522160-020	-
C Gasket	-	350620-020	350640-020	TLP-0050	350680-020

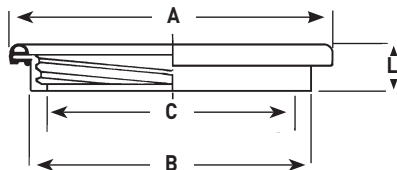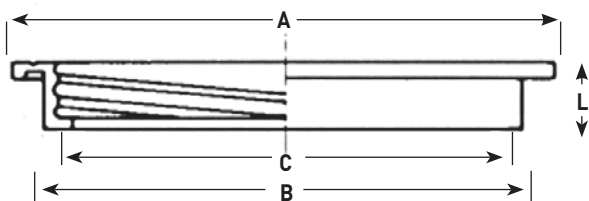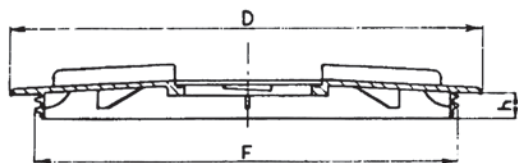

Male-Threaded Tank Lid Dimensions

Lid Size	D IN/MM	F IN/MM	H IN/MM
6"	5.5/140	4.3/110	-
8"	9.8/250	8.3/210	1.2/31
12"	14.0/355	12.3/313	1.2/31
16"	17.9/454	16.1/410	1.0/25
22"	24.4/620	22.3/567	1.2/30

Standard Ring Dimensions

Lid Size	A IN/MM	B IN/MM	C IN/MM	L IN/MM
6"	6.3/159	4.9/125	4.4/112	0.7/17
8"	10.0/255	8.5/215	7.6/192	1.5/38
12"	14.2/360	12.6/320	11.4/290	1.5/38
16"	18.2/462	16.3/415	15.0/382	1.4/35
22"	24.4/620	22.6/575	21.3/540	1.6/41

Ring with "C" Gasket Dimensions

Lid Size	A IN/MM	B IN/MM	C IN/MM	L IN/MM
8"	10.0/255	8.5/215	7.6/192	1.5/38
12"	14.0/355	12.6/320	11.4/290	1.5/38
16"	18.1/460	16.3/415	15.0/382	1.4/35
22"	24.4/620	22.6/575	21.3/540	1.6/41



- Easily mounted on a flat surface, the ProCap tank lids are available as a solid lid, with a labyrinth breather, or a bullet breather
- ProCap lid and ring assembly features DuraLok technology, a unique twist and lock closing system
- DuraLok gasket sold separately. See chart on page 196.

Tank Lids and Ring Assemblies with DuraLok™ Technology



Breather Type	8"	12"	16"
Solid Lid/Ring	TL08-0001	TL12-0001	TL16-0001
Labyrinth Lid/Ring	TL08-0002	TL12-0002	TL16-0002
Bullet Breather Lid/Ring	TL08-0003	TL12-0003	TL16-0003
Solid Lid	TL08-0011	TL12-0011	TL16-0011
Labyrinth Lid Only	TL08-0012	TL12-0012	TL16-0012
Bullet Breather Lid	TL08-0013	TL12-0013	TL16-0013
Ring Only	TL08-0014	TL12-0014	TL16-0014

DuraLok Lid Dimensions

Lid Size	D IN (MM)	E IN (MM)	F IN (MM)
8"	10(254)	8.3(210)	.96(24)
16"	18.1(460)	16.2(411)	.96(24)

DuraLok Ring Dimensions

Lid Size	I IN (mm)	G IN (mm)	H IN (mm)
8"	9.2 (284)	8.25 (210)	10.1 (257)
16"	17.4 (442)	16.3 (414)	18.3 (465)

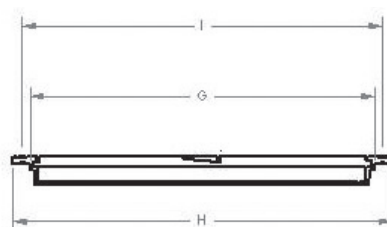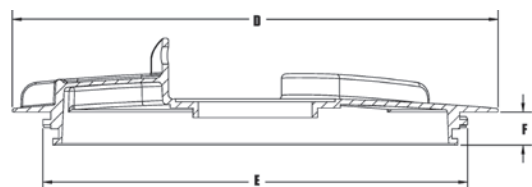

G = Inside diameter for leak content
H = Outside diameter
I = Screw hole diameter

Tank Lids



180° Hinged Tank Lids with DuraLok Technology

- Easily mounted on a flat surface, the ProCap tank lids are available with a labyrinth breather or a bullet breather
- ProCap hinged tank lids feature DuraLok technology, a unique twist and lock closing system
- Lids come standard with a locking hasp for added security
- The 180° hinged design allows the lid to open completely for easy tank access
- EPDM lid gasket is included

Breather Type	Lid Size	
	12"	16"
Labyrinth	TL12-0006	TL16-0006
Bullet	TL12-0007	TL16-0007



Arag Hinged Tank Lids

Part Number	Part Number	Size	Description
356040	Y01356040	12"	Hinged Lid/Ring with Bullet Breather
356041	-	12"	Hinged Lid/Ring with Bullet Breather and Locking Lid
356240	-	12"	Hinged Lid/Ring with Labyrinth Breather
356241	-	12"	Hinged Lid/Ring with Labyrinth Breather and Locking Lid
356060	0135606H	16"	Hinged Lid/Ring with Bullet Breather
356061	Y01356061	16"	Hinged Lid/Ring with Bullet Breather and Locking Lid
356260	-	16"	Hinged Lid/Ring with Labyrinth Breather
356261	-	16"	Hinged Lid/Ring with Labyrinth Breather


Available for order through HYPRO-EU only (Cambridge, UK)

Gaskets for Hinged Tank Lids

Part Number	Description
356640-020NB	12" Wiper Gasket between Lid and Ring
356660-020NB	16" Wiper Gasket between Lid and Ring


Arag Hinged Dimensions

Lid Size	D-IN (mm)	B-IN (mm)	L-IN (mm)	M-IN (mm)	S-IN (mm)
12"	14.45 (367)	12.60 (320)	3.98 (101)	1.04 (26)	15.35 (390)
16"	18.19 (462)	16.34 (415)	3.98 (101)	1.04 (26)	19.13 (486)

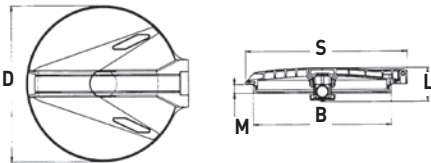

Gaskets

Lid Size	Gasket
8"	TLP-0007
12"	TLP-0018
16"	TLP-0023



Basket Filters

Part Number	Size	Basket Height (mm)	Mesh/Cam Lock Type
9950-08050	8"	50 (2.0")	18
9950-08120	8"	120 (4.7")	18
9950-08240	8"	240 (9.4")	18
9950-12060	12"	60 (2.4")	18
9950-12240	12"	240 (9.4")	18
9950-16180	16"	180 (7.1")	18
9950-16280	16"	280 (11.0")	18
9950-16320	16"	320 (12.6")	18


Tank Accessories



ProClean High Performance Tank and Container Wash Nozzles

Photo Reference	Part Number	Description
A & B	PC1/2F-36075-PV	ProClean rotating container wash nozzle and valve
A	PC1/2F-36075	ProClean rotating container wash nozzle
B	PV1/2F1/2M-MA	ProClean push valve assembly
C	PC1/2F-235120	ProClean tank wash nozzle
D	30B4SNF70E35	ProClean Plus static blade container wash nozzle

Bulkhead Fitting

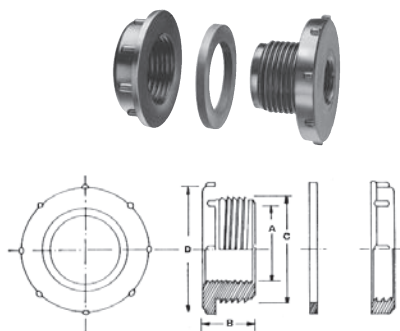

Part Number	A	B	C	D	Material	Gasket Part Number	Gasket Material
WBH12	1/2" NPT	1-3/16" (30 mm)	1-5/8" (41 mm)	2-3/4" (70 mm)	Polypropylene	WBH12/34GAS	Santoprene
WBH34	3/4" NPT	1-3/16" (30 mm)	1-5/8" (41 mm)	2-3/4" (70 mm)	Polypropylene	WBH12/34GAS	Santoprene
WBH100	1" NPT	1-7/8" (48 mm)	2-1/16" (52 mm)	2-7/8" (73 mm)	Polypropylene	WBH100GAS	Santoprene
WBH114	1-1/4" NPT	1-7/16" (37 mm)	2-1/2" (64 mm)	3-3/8" (86 mm)	Polypropylene	WBH114/112GAS	Santoprene
WBH112	1-1/2" NPT	1-7/16" (37 mm)	2-1/2" (64 mm)	3-3/8" (86 mm)	Polypropylene	WBH114/112GAS	Santoprene
WBH200	2" NPT	1-5/8" (41 mm)	3-1/8" (79 mm)	4-1/4" (108 mm)	Polypropylene	WBH200GAS	Santoprene
WBH300	3" NPT	1-3/4" (44 mm)	4-1/4" (108 mm)	5-1/2" (140 mm)	Polypropylene	-	-
WBH400	4" NPT	4-3/16" (106 mm)	5-1/2" (140 mm)	7" (178 mm)	Polypropylene	-	-

Add Prefix "BG-" for 1 part per retail bag.



Jet Agitators

Part Number	Ref. Number	Thread	Max. Input: Output Ratio	Material
3371-0019	1	3/4" NPT (M) x 3/4" NPT (M)	3.9	Polypropylene
3371	2	1/2" NPT (F) in, 3/4" NPT (M) out	3.4	Polypropylene
3371-0028	3	3/4" NPT (M) (high volume)	5.1	Polypropylene
3R12	4	1/2" NPT (M) Tee	—	Polypropylene
502069	5	1/2" NPT 9 mm Nozzle with Swivel	—	Polypropylene
52169	5	1/2" NPT 9 mm Nozzle	—	Polypropylene



Labyrinth Air Valve


Part Number	Description
504203-HYP	Polypropylene Labyrinth Air Valve with 1" male connection
G40004	Gasket for installation in tank



Floating Ball Vent Valve

Part Number	Description
504210*	Polypropylene Floating Ball Vent Valve
500615-060	Optional Spring for no-spill applications

*2.35" tank hole dimension required for installation.

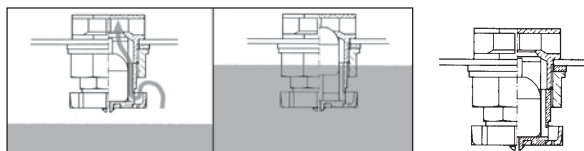

CLEANLOAD Chemical Eductor

For Safe Loading of Chemicals into Spray Tanks



3375 Series

3376 Series
Right hand flow shown.

- The Cleanload is a self-contained eduction system which allows the operator to mix liquid and dry chemicals safely and quickly
- All crop protection chemistry is mixed at ground level, ensuring the safety of both the operator and the environment
- Equipped with tank rinse, designed to completely wash the Cleanload hopper
- ProClean™ bottle rinse (see page 197 for more information) allows operator to triple rinse chemical containers on-site
- Optional suction lance allows the operator to educt bulk liquid and dry chemicals (wetable powders, dry flowables and water-dispersible granules) from large containers without secondary handling
- See page 199 for performance information on all Cleanload models and Eductors

Order Information

Part Number	Tank Size	Eductor	Flow	Tank Rinse Style	Inlet/Outlet Connection Size	Bottle Rinse Assy	ISO Outlet Screen	Suction Lance
3376-0870	7 Gallon (26 Litre)	Turf/Diaphragm Poly - (08mm) High Pressure/Low Flow	Right Hand	Premium Sidewall Rinse System	220 Universal Flange	Yes	Yes	Optional Accessory
3376-0871	7 Gallon (26 Litre)	Turf/Diaphragm Poly - (08mm) High Pressure/Low Flow	Left Hand	Premium Sidewall Rinse System	220 Universal Flange	Yes	Yes	Optional Accessory
3376-1170	7 Gallon (26 Litre)	On-Board Sprayer Poly - (11mm) High Pressure/High Flow	Right Hand	Premium Sidewall Rinse System	220 Universal Flange	Yes	Yes	Optional Accessory
3376-1171	7 Gallon (26 Litre)	On-Board Sprayer Poly - (11mm) High Pressure/High Flow	Left Hand	Premium Sidewall Rinse System	220 Universal Flange	Yes	Yes	Optional Accessory
3376-1670	7 Gallon (26 Litre)	Transfer Pump Poly - (16mm) Low Pressure/High Flow	Right Hand	Premium Sidewall Rinse System	220 Universal Flange	Yes	Yes	Optional Accessory
3376-1671	7 Gallon (26 Litre)	Transfer Pump Poly - (16mm) Low Pressure/High Flow	Left Hand	Premium Sidewall Rinse System	220 Universal Flange	Yes	Yes	Optional Accessory
3375P-05T4	4.5 Gallon (17 Litre)	316 Stainless Steel	Right Hand	Tee Rinse System	1-1/4" x 1-1/2" Flynut Ready	No	Optional Accessory	No
3375P-05T5	5.5 Gallon (21 Litre)	316 Stainless Steel	Right Hand	Lid Rinse System	1-1/4" x 1-1/2" Flynut Ready	Yes	Optional Accessory	Optional Accessory
3375P-05T7	7 Gallon (26 Litre)	316 Stainless Steel	Right Hand	Lid Rinse System	1-1/4" x 1-1/2" Flynut Ready	Yes	Optional Accessory	Optional Accessory
3375P-05T7-K*	7 Gallon (26 Litre)	316 Stainless Steel	Right Hand	Lid Rinse System	1-1/4" x 1-1/2" Flynut Ready	Yes	Optional Accessory	Optional Accessory

* Semi-assembled kit for reduced shipping. Carton quantity: 5

Accessories

Part Number	Description	Models
3430-0823	Suction Lance snaps into tank outlet for remote loading of bulk chemical containers	All 3376 Models
3430-0594	Suction Lance snaps into tank outlet for remote loading of bulk chemical containers	All 3375 Models (except 3375P-05T4)
3430-0596	Base kit quickly bolts onto Cleanload frame for floor mounting	All 3375 Models
3410-0040	Low flow kit adapt the stainless steel eductor for pump flows as low as 14 GPM (55 L/min)	All 3375 Models
3350-0148	Tank outlet screen prevent large debris from entering the eductor venturi	All 3375 Models
3430-0806	12" Replacement tank lid	3375 - 5 Gallon Models
3430-0807	16" Replacement tank lid	3375 & 3376 - 7 Gallon Models

CLEANLOAD Poly or Stainless Steel Eductor



Poly Eductor:

- Market leading eduction rates designed for real world applications
- Optimizes system plumbing costs with an integrated 1/2" push-to-connect port for tank rinse
- One-piece polypropylene eductor assembly with mounting bosses and 220 Universal Flange ports
- Choose from three nozzle sizes along with right or left-hand push-to-connect orientation to fit your specific application
- Rinse port shown in right-hand configuration. Left-hand configuration is 180° from shown.

316 Stainless Steel Eductor:

- Inlet and outlet ports are flynut-ready, offering a wrench-free connection of hoses for easy installation and servicing
- Dual-ported to accommodate rinse port for either left-hand or right-hand flow orientation

Order Information

Part Number	Application	Nozzle	Rinse Port Orientation	Description
3371-0036	Turf & Diaphragm: High Pressure/Low Flow	8mm	Right Hand	Includes three 220 Universal Flange Gaskets and a 1/2" Push-to-Connect plug
3371-0036R			Right Hand	Eductor Only
3371-0037R			Left Hand	Eductor Only
3371-0038	On-Board Sprayer: High Pressure/High Flow	11mm	Right Hand	Includes three 220 Universal Flange Gaskets and a 1/2" Push-to-Connect plug
3371-0038R			Right Hand	Eductor Only
3371-0039R			Left Hand	Eductor Only
3371-0040	Transfer Pump: Low Pressure/High Flow	16mm	Right Hand	Includes three 220 Universal Flange Gaskets and a 1/2" Push-to-Connect plug
3371-0040R			Right Hand	Eductor Only
3371-0041R			Left Hand	Eductor Only
3371-0034S	On-Board Sprayer: High Pressure/High Flow	12mm	Dual Ported	316 Stainless Steel Eductor

Performance for all Cleanload Models and Eductors:

Eductor Material:		Poly																Stainless Steel							
Application:		Turf / Diaphragm Pump: High Pressure - Low Flow						On-Board Sprayer Pump: High Pressure - High Flow						Transfer Pump: Low Pressure - High Flow						On-Board Sprayer Pump: High Pressure - High Flow					
Cleanload Part #:		3376-0870 & 3376-0871						3376-1170 & 3376-1171						3376-1670 & 3376-1671						3375 Models					
Eductor Part #:		3371-0036, -0036R & -0037R						3371-0038, -0038R & -0039R						3371-0040, -0040R & -0041R						3371-0034S					
Inlet Pressure		Req. Flow		Eduction Rate		Max Outlet Press		Req. Flow		Eduction Rate		Max Outlet Press		Req. Flow		Eduction Rate		Max Outlet Press		Req. Flow		Eduction Rate		Max Outlet Press	
PSI	BAR	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM	PSI	LPM	GPM	LPM	GPM	LPM	PSI	LPM	GPM	LPM	GPM	LPM	PSI	LPM
10	0.7	-	-	-	-	-	-	-	-	-	-	-	-	46.0	174	24.6	93	5.9	0.4	-	-	-	-	-	-
20	1.4	-	-	-	-	-	-	26.9	102	35.0	133	6.1	0.4	61.4	233	47.8	181	11.5	0.8	29.5	112	16.5	62	4.9	0.3
30	2.1	16.1	61	31.5	119	5.2	0.4	33.5	127	52.2	198	9.2	0.6	73.5	278	61.2	231	16.9	1.2	35.2	133	26.0	98	7.0	0.5
40	2.8	19.1	72	47.0	178	6.6	0.5	38.0	144	64.4	244	12.3	0.8	82.9	314	67.2	254	22.4	1.5	40.4	153	32.9	125	9.0	0.6
50	3.4	21.4	81	54.5	206	8.1	0.6	41.3	157	72.6	275	15.3	1.1	90.3	342	68.3	258	27.8	1.9	45.3	171	39.1	148	11.0	0.8
60	4.1	23.3	88	61.5	233	9.7	0.7	44.4	168	77.7	294	18.2	1.3	96.2	364	66.8	253	33.1	2.3	49.8	189	45.9	174	13.3	0.9
70	4.8	24.9	94	68.0	258	11.2	0.8	47.5	180	80.5	305	21.1	1.5	101.3	384	65.1	247	38.4	2.6	53.8	204	52.4	198	15.5	1.1
80	5.5	26.4	100	74.1	280	12.7	0.9	50.9	193	82.1	311	23.9	1.6	-	-	-	-	-	-	57.5	218	58.0	220	17.8	1.2
90	6.2	28.0	106	79.7	302	14.2	1.0	53.9	204	83.3	315	26.6	1.8	-	-	-	-	-	-	60.7	230	62.0	235	20.0	1.4
100	6.9	29.7	112	84.8	321	15.8	1.1	56.6	214	85.0	322	29.3	2.0	-	-	-	-	-	-	63.6	241	65.0	246	22.3	1.5

Polypropylene Line Strainers

Rated for 80 psi at 70°F / 5.5 bar at 21°C



Part Number	NPT Threads	Replacement Parts for Polypropylene Line Strainers				
		Cap	Bowl	Screen	Mesh	O-ring
3350-0085A	1/4" I.D. (F)	3351-0035	3351-0036	3800-0048	20 s.s.	1700-0090 EPDM
3350-0079A	& 1/2" O.D. (M)	3351-0035	3351-0036	3800-0046	50 s.s.	1700-0090 EPDM
3350-0082A		3351-0035	3351-0036	3800-0047	80 s.s.	1700-0090 EPDM
3350-0056A	1/2"	3351-0037	3351-0039	3800-0029	20 s.s.	1700-0091 EPDM
3350-0046A		3351-0037	3351-0039	3800-0025	50 s.s.	1700-0091 EPDM
3350-0043A		3351-0037	3351-0039	3800-0026	80 on 20 s.s.	1700-0091 EPDM
3350-0040A	3/4"	3351-0038	3351-0039	3800-0029	20 s.s.	1700-0091 EPDM
3350-0034A		3351-0038	3351-0039	3800-0025	50 s.s.	1700-0091 EPDM
3350-0035A		3351-0038	3351-0039	3800-0026	80 on 20 s.s.	1700-0091 EPDM
3350-0057A	1"	3351-0040	3351-0043	3800-0040	20 s.s.	1700-0092 EPDM
3350-0058A		3351-0040	3351-0043	3800-0041	50 s.s.	1700-0092 EPDM
3350-0059A		3351-0040	3351-0043	3800-0042	80 on 20 s.s.	1700-0092 EPDM
3350-0071A	1-1/4"	3351-0041	3351-0043	3800-0043	20 s.s.	1700-0092 EPDM
3350-0072A		3351-0041	3351-0043	3800-0044	50 s.s.	1700-0092 EPDM
3350-0073A		3351-0041	3351-0043	3800-0045	80 on 20 s.s.	1700-0092 EPDM
3350-0112A	1-1/2"	3351-0042	3351-0043	3800-0065	20 s.s.	1700-0092 EPDM
3350-0113A		3351-0042	3351-0043	3800-0066	50 s.s.	1700-0092 EPDM
3350-0114A		3351-0042	3351-0043	3800-0067	80 on 20 s.s.	1700-0092 EPDM

All 1/2", 3/4", 1-1/4" and 1-1/2" have internal (NPT) female ports, polypropylene cap and bowl.

Polypropylene Line Strainers

Rated for 200 psi at 70°F / 14 bar at 21°C



NPT Part Number	BSP Part Number	BSP Part Number*	Max. PSI	Max. BAR	Threads	Previous Color	Screen Size/ Ref. Color	New ISO Color	Screen
3350-0142N	3350-0142B	20N62230	290	20	1/2" FNPT	White	32 Mesh/White	Red	3800-0086
3350-0143N	3350-0143B	20N62250				Blue	50 Mesh/Blue	Blue	3800-0087
3350-0144N	3350-0144B	20N62280				Gray	80 Mesh/Gray	Yellow	3800-0088
3350-0145N	3350-0145B	-				Red	100 Mesh/Red	Green	3800-0089
3350-0146N	3350-0146B	20N62330	290	20	3/4" FNPT	White	32 Mesh/White	Red	3800-0086
3350-0147N	3350-0147B	20N62350				Blue	50 Mesh/Blue	Blue	3800-0087
3350-0148N	3350-0148B	20N62380				Gray	80 Mesh/Gray	Yellow	3800-0088
3350-0149N	3350-0149B	-				Red	100 Mesh/Red	Green	3800-0089
3350-0150N	3350-0150B	20N62430	290	20	1" FNPT	White	32 Mesh/White	Red	3800-0090
3350-0151N	3350-0151B	20N62450				Blue	50 Mesh/Blue	Blue	3800-0091
3350-0152N	3350-0152B	20N62480				Gray	80 Mesh/Gray	Yellow	3800-0092
3350-0153N	3350-0153B	-				Red	100 Mesh/Red	Green	3800-0093
3350-0162N**	3350-0162B**	-	290	20	1" FNPT	White	32 Mesh/White	Red	3800-0090
3350-0163N**	3350-0163B**	-				Blue	50 Mesh/Blue	Blue	3800-0091
3350-0164N**	3350-0164B**	-				Gray	80 Mesh/Gray	Yellow	3800-0092
3350-0165N**	3350-0165B**	-				Red	100 Mesh/Red	Green	3800-0093
3350-0154N	3350-0154B	20N62530	250	17	1-1/4" FNPT	White	32 Mesh/White	Red	3800-0094
3350-0155N	3350-0155B	20N62550				Blue	50 Mesh/Blue	Blue	3800-0095
3350-0156N	3350-0156B	20N62580				Gray	80 Mesh/Gray	Yellow	3800-0096
3350-0157N	3350-0157B	-				Red	100 Mesh/Red	Green	3800-0097
3350-0166N**	3350-0166B**	203282152**	250	17	1-1/4" FNPT	White	32 Mesh/White	Red	3800-0094
3350-0167N**	3350-0167B**	203282153**				Blue	50 Mesh/Blue	Blue	3800-0095
3350-0168N**	3350-0168B**	2032821535**				Gray	80 Mesh/Gray	Yellow	3800-0096
3350-0169N**	3350-0169B**	-				Red	100 Mesh/Red	Green	3800-0097
3350-0158N	3350-0158B	20N62630	250	17	1-1/2" FNPT	White	32 Mesh/White	Red	3800-0094
3350-0159N	3350-0159B	20N62650				Blue	50 Mesh/Blue	Blue	3800-0095
3350-0160N	3350-0160B	20N62680				Gray	80 Mesh/Gray	Yellow	3800-0096
3350-0161N	3350-0161B	-				Red	100 Mesh/Red	Green	3800-0097
3350-0170N**	3350-0170B**	203282162**	250	17	1-1/2" FNPT	White	32 Mesh/White	Red	3800-0094
3350-0171N**	3350-0171B**	203282163**				Blue	50 Mesh/Blue	Blue	3800-0095
3350-0172N**	3350-0172B**	2032821635**				Gray	80 Mesh/Gray	Yellow	3800-0096
3350-0173N**	3350-0173B**	-				Red	100 Mesh/Red	Green	3800-0097

*Available for order through HYPRO-EU only (Cambridge, UK)

**Self-cleaning model.

Nylon Line Strainers

Rated for 150 psi at 70°F / 10.34 bar at 21°C

Rated for 100 psi at 125°F / 6.9 bar at 51.6°C


140°F max./ 60°C max.



Part Number	NPT Threads	Replacement Parts for Nylon Line Strainers				
		Cap	Bowl	Screen	Mesh	O-ring
3350-0085	1/4" I.D. (F) & 1/2" O.D. (M)	3351-0022	3351-0020 [Clear]	3800-0048	20 s.s.	1700-0064 Buna-N
3350-0085F		3351-0022		3800-0048	20 s.s.	1700-0065 Viton
3350-0079		3351-0022		3800-0046	50 s.s.	1700-0064 Buna-N
3350-0079F		3351-0022		3800-0046	50 s.s.	1700-0065 Viton
3350-0082		3351-0022		3800-0047	80 s.s.	1700-0064 Buna-N
3350-0082F		3351-0022		3800-0047	80 s.s.	1700-0065 Viton
3350-0056	1/2" (F)	3351-0007	3351-0005 (White) or 3351-0015* [Clear]	3800-0029	20 s.s.	1700-0044 Buna-N
3350-0131		3351-0007		3800-0029	20 s.s.	1700-0045 Viton
3350-0046		3351-0007		3800-0025	50 s.s.	1700-0044 Buna-N
3350-0042		3351-0007		3800-0025	50 s.s.	1700-0045 Viton
3350-0043		3351-0007		3800-0026	80 on 20 s.s.	1700-0044 Buna-N
3350-0068		3351-0007		3800-0026	80 on 20 s.s.	1700-0045 Viton
3350-0040	3/4" (F)	3351-0006	3351-0005 (White) or 3351-0015* [Clear]	3800-0029	20 s.s.	1700-0044 Buna-N
3350-0132		3351-0006		3800-0029	20 s.s.	1700-0045 Viton
3350-0034		3351-0006		3800-0025	50 s.s.	1700-0044 Buna-N
3350-0044		3351-0006		3800-0025	50 s.s.	1700-0045 Viton
3350-0035		3351-0006		3800-0026	80 on 20 s.s.	1700-0044 Buna-N
3350-0045		3351-0006		3800-0026	80 on 20 s.s.	1700-0045 Viton
3350-0057	1" (F)	3351-0014	3351-0013 (White) or 3351-0024* [Clear]	3800-0040	20 s.s.	1700-0057 Buna-N
3350-0060		3351-0014		3800-0040	20 s.s.	1700-0058 Viton
3350-0058		3351-0014		3800-0041	50 s.s.	1700-0057 Buna-N
3350-0061		3351-0014		3800-0041	50 s.s.	1700-0058 Viton
3350-0059		3351-0014		3800-0042	80 on 20 s.s.	1700-0057 Buna-N
3350-0062		3351-0014		3800-0042	80 on 20 s.s.	1700-0058 Viton
3350-0071	1-1/4" (F)	3351-0016	3351-0013 (White) or 3351-0024* [Clear]	3800-0043	20 s.s.	1700-0057 Buna-N
3350-0074		3351-0016		3800-0043	20 s.s.	1700-0058 Viton
3350-0072		3351-0016		3800-0044	50 s.s.	1700-0057 Buna-N
3350-0075		3351-0016		3800-0044	50 s.s.	1700-0058 Viton
3350-0073		3351-0016		3800-0045	80 on 20 s.s.	1700-0057 Buna-N
3350-0076		3351-0016		3800-0045	80 on 20 s.s.	1700-0058 Viton
3350-0112	1-1/2" (F)	3351-0026	3351-0013 (White) or 3351-0024* [Clear]	3800-0065	20 s.s.	1700-0057 Buna-N
3350-0115		3351-0026		3800-0065	20 s.s.	1700-0058 Viton
3350-0113		3351-0026		3800-0066	50 s.s.	1700-0057 Buna-N
3350-0116		3351-0026		3800-0066	50 s.s.	1700-0058 Viton
3350-0114		3351-0026		3800-0067	80 on 20 s.s.	1700-0057 Buna-N
3350-0117		3351-0026		3800-0067	80 on 20 s.s.	1700-0058 Viton

* Clear Polyimide Bowl - Add Suffix "P" - (ie.: 3350-0057P) - 1/2", 3/4", 1", 1-1/4" and 1-1/2".
1/2", 3/4", 1", 1-1/4" and 1-1/2" have internal (NPT) Female Ports, Type 6 nylon cap bowl.

Nylon Suction Strainers



Part Number	Thread	Screen	Estimated Weight Ea.	
			US Units	Metric Units
3350-0069	3/4" NPT [M]	50-mesh nylon	4 oz.	114 g
3350-0032	3/4" (19 mm) hose barb [all nylon]	50-mesh nylon	4 oz.	114 g
3350-0077	garden hose [M]	50-mesh nylon	4 oz.	114 g

Adjustable Pattern Spray Guns

3381-0016

- Adjustable pattern spray gun
- 15" (38 cm) barrel
- 3mm nozzle
- 3/8" (10 mm) MNPT inlet
- Sized for spot spraying



Order Information

Part Number	Max PSI	Max BAR	Max GPM	Max LPM
3381-0016	120	8	1	4

3381-0021

- Adjustable pattern spray gun
- 21" (53 cm) barrel
- 3mm nozzle
- 3/8" (10 mm) and 1/2" (13 mm) hose barb
- Sized for spot spraying



Order Information

Part Number	Max PSI	Max BAR	Max GPM	Max LPM
3381-0021	60	4	1	4

3381-0036

- Adjustable pattern spray gun
- 19" (48 cm) barrel
- 3mm nozzle
- 3/8" (10 mm) hose barb



Order Information

Part Number	Max PSI	Max BAR	Max GPM	Max LPM
3381-0036	120	8	2.5	10

3381-0043 & 3381-0043L

- Adjustable pattern spray gun
- 7-1/4" (18 cm) or 18" (45 cm) barrel
- 2.3mm nozzle
- 3/8" (10 mm) and 1/2" (13 mm) hose barb



Order Information

Part Number	Barrel Length		Max PSI	Max BAR	Max GPM	Max LPM
	US Units	Metric Units				
3381-0043	7-1/4"	18 cm	600	40	11	18
3381-0043L	18"	45 cm	600	40	11	18
9920-261703-69	Replacement Barrel for 3381-0043					
9920-35.1703.67	Replacement Barrel for 3381-0043L					
3430-0768	Replacement nozzle kit					

Spray Gun Nozzles for 3381-0043 and 3381-0043L Guns

Part Number	Orifice	Performance	45 PSI		100 PSI		150 PSI		200 PSI		300 PSI		450 PSI		600 PSI	
			Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight
AMT-15010 replaces 9920-61.1802.45	1.0 mm	GPM spray angle throw, ft	0.24 30° 3.2	0.24 - 8.2	0.35 30° 4.9	0.37 - 13.0	0.40 40° 6.5	0.45 - 18.0	0.53 40° 6.5	0.60 - 18.5	0.57 40° 6.5	0.60 - 19.5	0.70 40° 7.2	0.75 - 21.0	0.83 38° 8.2	0.90 - 23.0
AMT-15012 replaces 9920-61.1802.46	1.2 mm	GPM spray angle throw, ft	0.35 32° 3.9	0.38 - 9.8	0.55 35° 5.5	0.55 - 14.5	0.60 45° 7.2	0.65 - 20.0	0.80 42° 7.2	0.93 - 21.0	0.88 42° 7.2	0.90 - 22.0	1.10 40° 8.2	1.20 - 23.5	1.30 40° 8.2	1.40 - 25.5
AMT-15015 replaces 9920-61.1802.47	1.5 mm	GPM spray angle throw, ft	0.40 32° 3.9	0.50 - 11.5	0.62 35° 6.5	0.80 - 14.5	0.62 45° 8.2	0.93 - 23.0	0.95 45° 8.2	1.25 - 24.0	1.00 42° 8.2	1.30 - 24.5	1.30 42° 8.2	1.70 - 26.0	1.50 42° 10.0	1.95 - 28.0
AMT-15018 replaces 9920-61.1802.48	1.8 mm	GPM spray angle throw, ft	0.50 40° 4.9	0.75 - 13.0	0.73 42° 6.5	1.20 - 16.5	0.85 50° 8.2	1.35 - 26.0	1.15 45° 8.2	1.75 - 27.0	1.20 50° 8.2	1.90 - 28.0	1.60 48° 9.8	2.30 - 31.0	1.75 48° 10.0	2.80 - 33.0
AMT-15020 replaces 9920-61.1802.55	2.0 mm	GPM spray angle throw, ft	0.73 40° 3.9	1.10 - 14.5	1.05 42° 6.0	1.60 - 19.5	1.30 55° 8.2	1.90 - 29.5	1.50 55° 8.2	2.40 - 30.5	1.60 55° 8.2	2.50 - 31.0	1.90 53° 9.8	3.00 - 34.0	2.20 50° 10.0	3.50 - 36.0
AMT-15023 replaces 9920-61.1802.68	2.3 mm	GPM spray angle throw, ft	0.90 40° 4.9	1.40 - 16.5	1.30 42° 6.5	1.90 - 24.5	1.50 55° 10.0	2.30 - 32.0	2.00 55° 10.0	3.20 - 35.0	2.10 55° 10.0	3.30 - 36.0	2.70 53° 9.8	4.10 - 38.0	3.10 51° 10.5	4.80 - 39.0
9920-61.1802.45	4.0 mm	GPM throw, ft	-	-	-	-	1.9 10	3.4 36	-	-	4.6 10	8.0 38	5.5 10	9.5 40	6.3 12	11.0 40

Adjustable Pattern Spray Guns

3381-0010 and 3381-0011

- Adjustable pattern spray gun
- 17" (43 cm) or 21" (53 cm) barrel
- 3mm or 4mm nozzle
- 1/2" (13 mm) MNPT inlet



3381-0013

- Adjustable pattern spray gun
- 7" (18 cm) barrel
- 3mm nozzle
- 1/2" (13 mm) MNPT inlet



Order Information

Part Number	Barrel Length		Noz- zle	Max PSI	Max BAR	Max GPM	Max LPM
	US Units	Metric Units					
3381-0010	17"	43 cm	3mm	1200	83	25	95
3381-0011	21"	53 cm	4mm	1200	83	30	114
9920-KIT10/11	Repair Kit						
9920-248	Swivel Kit						

Order Information

Part Number	Max PSI	Max BAR	Max GPM	Max LPM
3381-0013	700	40	19	72
9920-248	Swivel Kit			

Tree Spraying Guide Hypro Diaphragm Pump Gas Engine Applications

Spray Height	Pump/Engine Model	Engine	Shaft	Spray Gun	Nozzle
30-35 ft.	9910-D252GRGI58 (w/o engine) 9910-D252GRGI (w/o engine) D252GRGI-25 (w/2.5 hp PowerPro™) D252GRGI-55 (w/5.5 hp PowerPro™) 6 GPM; 290 PSI	Min. 2.5 hp SAE j609a flange mount	5/8" 3/4" 5/8" 3/4"	3381-0010 or 3381-0013	3385-3000
35-40 ft.	9910-D30GRGI (w/o engine) D30GRGI-65 (w/6.5 hp PowerPro™) D30HRGI-65 (w/6.5 hp PowerPro™) D30HRGI-65E (w/6.5 hp PowerPro™) 9.5 GPM; 580 PSI	Min. 5.0 hp SAE j609a flange mount	3/4" 3/4" 3/4" 3/4"	3381-0010 or 3381-0013	3385-3000
45-50 ft.	9910-D50 (w/o engine, controller or gearbox) 14 gpm; 580 psi	Min 8.0 hp SAE j609a flange mount	1"	3381-0011	3385-4000
45-50 ft.	9910-D503GRGI (w/o engine) 15 gpm; 580 psi	Min 8.0 hp SAE j609a flange mount	1"	3381-0011	3385-4000
50-57 ft.	9910-D813GRGI (w/o engine) 21 gpm; 725 psi	Min 14.0 hp SAE j609a flange mount	1"	3381-0011	3385-4500
60-68 ft.	9910-D1064GRGI (w/o engine) 28 gpm; 725 psi	Min 18.0 hp SAE j609a flange mount	1"	3381-0011	3385-6000

All GRGI pump models come complete with gear reduction and control valve.

Performance Chart for Models 3381-0010, 3381-0011 and 3381-0013 Spray Guns

Hypro Model Number	Orifice Diameter In MM	Pressure In PSI** Performance	200 PSI Setting		350 PSI Setting		500 PSI Setting		600 PSI Setting		650 PSI Setting		700 PSI Setting		850 PSI Setting	
			Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight
3385-1500	1.5	capacity in gpm max throw (ft)*	1.14 9.2	1.26 21.5	1.48 10.3	1.7 25.2	1.8 11.2	2 28	1.9 12.1	2.2 31.8	2 12.1	2.3 32	2.1 12.3	2.4 32.3	2.2 13.1	2.5 34.3
3385-2300	2.3	capacity in gpm max throw (ft)*	2.1 11.4	2.7 29	2.7 12.9	3.7 33.9	3.4 14.8	4.5 37.9	3.8 16.6	4.9 41.5	3.8 17	5 41.7	3.9 17.7	5.1 42	4.2 19	5.8 45.7
3385-3000	3	capacity in gpm max throw (ft)*	2.9 11.7	4.6 29.2	3.7 12.9	6.3 33.9	4.8 13.8	7.5 36.2	5.2 15.6	8.4 40.8	5.3 16	8.5 40.7	5.4 16.2	8.6 42	6 17	9.6 44.1
3385-3500	3.5	capacity in gpm max throw (ft)*	5.8 13.6	6 36.2	7.9 19	8.2 41.2	9.6 22.6	9.9 45.3	10.7 25.5	11.1 50	11 25.5	11.3 51	11.2 27	11.6 51.5	12.4 28.8	12.8 54
3385-4000	4	capacity in gpm max throw (ft)*	7 15.1	7.3 37.7	9.6 20.6	9.9 42.8	11.6 24.3	12 47	12.9 27.2	13.5 53	13.2 27.2	13.8 54	13.6 28.5	14.1 55	15 29	15.6 59
3385-4500	4.5	capacity in gpm max throw (ft)*	8.2 18.1	8.9 39.2	11.1 22.2	12 44.3	13.4 26	14.5 50.1	15 30.6	16.3 54	15.4 30.6	16.6 56	15.7 31	17 57	17.4 31.5	18.9 62
3385-5000	5	capacity in gpm max throw (ft)*	9.8 19.6	10.2 40.7	13.3 23.8	13.8 47	16 27.5	16.7 53.3	18 32.3	18.7 59	18.4 32.3	19.1 61	18.9 32.8	19.5 62	20.8 32.8	21.6 67
3385-5500	5.5	capacity in gpm max throw (ft)*	10.7 19.6	11.5 42.2	14.4 23.8	15.6 50.7	17.4 29	18.8 57	19.6 34	21 63	20 34	21.5 64	20.4 34.5	22 65	22.6 34.5	24.4 70
3385-6000	6	capacity in gpm max throw (ft)*	11.5 21.1	12.6 43.7	15.6 25.3	17.1 54	18.8 30.7	20.6 60	23.2 35.6	21 66	21.5 35.6	23.7 67	22 36	24.2 68	24.4 36	26 97.4
3385-7000	7	capacity in gpm max throw (ft)*	11.5 21.1	13.5 46.8	15.6 25.3	18.4 57	18.8 30.7	22.2 63	21 37.4	25 70	21.5 37.4	25.4 71	22 38	26 72	24.4 38	29 77

* Figures shown are guidelines for vertical throw.

** Pressures based on relief valve settings at straight throw.

Adjustable Pattern Spray Guns



Long range high pressure spray gun

- Brass body
- Stainless steel pipe
- Handle and nozzle protection in high-resistance polymer
- Ergonomic handgrip
- Quick-release trigger lock
- Swivel inlet port
- Adjustable spray pattern from hollow cone to solid stream

Top Gun

Part Number	Max.PSI	Max.BAR	Max.GPM	Max.LPM	Nozzle Size	Nozzle Number	Connection		Estimated Weight Ea.	
							US Units	Metric Units	US Units	Metric Units
002201-3430	850	60	35.0	130	3.0 mm	003430	1/2" HB	13 mm	3 lbs. 8 oz.	13 kg
002201-3440	850	60	35.0	130	4.0 mm	003440	1/2" HB	13 mm	3 lbs. 8 oz.	13 kg
002201-3460	850	60	35.0	130	6.0 mm	003460	1/2" HB	13 mm	3 lbs. 8 oz.	13 kg
002201-3470	850	60	35.0	130	7.0 mm	003470	1/2" HB	13 mm	3 lbs. 8 oz.	13 kg

Hose barb and nut kit (sold separately): 3/8" - 006320; 1/2" - 006330.

Pressure (PSI)

		200 PSI		350 PSI		500 PSI		600 PSI		720 PSI	
		Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight	Cone	Straight
3	Flow GPM	3.8	5.2	5.6	6.8	6.6	8.5	7	9.2	7.3	10
	Max. throw ft.	12	36	13	37	15	41	16	44	21	46
4	Flow GPM	6	8.2	7.3	12.7	8.6	13.2	10.2	14.5	11.4	15.9
	Max. throw ft.	14	42	15	44	16	49	19	52	23	57
6	Flow GPM	9	16	11.5	22.2	14	25.8	15.5	26.7	16.2	27.5
	Max. throw ft.	19	59	21	62	25	66	26	68	31	72
7	Flow GPM	10.5	17.5	13.8	25.7	16.8	30.6	18.2	33.2	20.3	34.3
	Max. throw ft.	21	60	23	67	26	72	27	77	31	82



Econo Gun

Part Number	Max.PSI	Max.BAR	Max.GPM	Max.LPM	Connection	
					US Units	Metric Units
506532V	150	10	40.0	150	1/2" HB	13 mm
506530V	150	10	40.0	150	3/4" HB	19 mm
506531V	150	10	40.0	150	1" HB	25 mm

Measurement Components

Orion® Flowmeters



New digital technology converts fluid ion flow into gpm/lpm, virtually making mechanical flowmeters obsolete. These precise flowmeters work by utilizing sensors to relay pulse signals and converting them into gpm/lpm readings. The Visual-Flow flowmeter, with touch pad, displays instant flow reading for quantity of fluid filled.

- No mechanical moving parts
- Advanced technology at an affordable price
- Performance independent from fluid density and viscosity
- Low sensitivity to turbulence
- Wide variety of flows for use in diverse applications
- High precision, typical error is 0.5%
- Pulse output is 0-12 volts, max. consumption of 300 mA (milliamps)
- Accuracy and precision saves chemical throughout the life of the system
- Working pressure up to 580 psi (40 bar)
- Integrates with existing rate controllers
- AMP® Super Seal™ connection

1-Visual-Flow Flowmeter With Male Thread Adapters

Part Number	Part Number	Flow (GPM)	Flow (L/min)	Size	Max PSI	Max BAR
4621BA01313	-	0.13 - 2.6	.5-10	3/4"	290	20
4621BA11313	-	0.3 - 5	1-20	3/4"	290	20
4621BA41414	-	2.6 - 53	10-200	1"	290	20
4622BA51616	464622BA51616	5 - 106	20-400	1-1/2"	290	20
4622BA61717	464622BA61717	8 - 158	30-600	2"	290	20

Available for order through HYPRO-EU only (Cambridge, UK)

2-Orion Flowmeter With Male Thread Adapters

Part Number	Part Number	Flow (GPM)	Flow (L/min)	Size	Max PSI	Max BAR
4621AA11313	-	.3 - 5	1-20	3/4"	290	20
4621AA31414	-	1.4 - 26	5-100	1"	290	20
4621AA41414	-	2.6 - 53	10-200	1"	290	20
4621AA41515	-	2.6 - 53	10-200	1-1/4"	290	20
4622AA51616	464622AA51616	5 - 106	20-400	1-1/2"	290	20
4622AA61717	464622AA61717	8 - 158	30-600	2"	290	20

Available for order through HYPRO-EU only (Cambridge, UK)

3-Orion Flowmeter Only

Part Number	Part Number	Flow (GPM)	Flow (L/min)	Max PSI	Max BAR	Adapter Series
4621AA10000	464621AA10000	0.3 - 5	1-20	580	40	463
4621AA20000	464621AA20000	0.6 - 13	2-50	580	40	463
4621AA30000	464621AA30000	1.3 - 26	5-100	580	40	463
4621AA40000	464621AA40000	2.6 - 53	10-200	580	40	463
4622AA40000	-	2.6 - 53	10-200	580	40	473
4622AA50000	-	5 - 106	20-400	580	40	473

Bolt Kit, V1M258-FM, includes stainless steel bolts, washers and lock nuts.

Available for order through HYPRO-EU only (Cambridge, UK)

Adapter Cables

Part Number	Reference Number	Description
AE2650	A	Orion to Raven® (Conxall®)
AE2651	B	Orion to TeeJet® (Deutsch®)
AE2652	C	Orion to John Deere (Packard®)
AE2654	D	Orion to MidTech (Packard Weather Pack®)
4622BA50000-100	*	4 pin, 10' extension cable (Visual-Flow)*
4622BA50000-200	*	4 pin cable w/pump stop unit (Visual-Flow)*
4621AA10000-100	*	3 pin, 10' extension cable (Orion)*

*Not shown.

Orion® is a registered trademark of ARAG.

Raven® is a registered trademark of Raven Industry


Conxall® is a registered trademark of Conxall Corp.

TeeJet® is a registered trademark of Spraying Systems Co.

Packard® is a registered trademark of Delphi

Packard Weather Pack® is a registered trademark of Delphi

Hypro® is a registered trademark of Pentair.

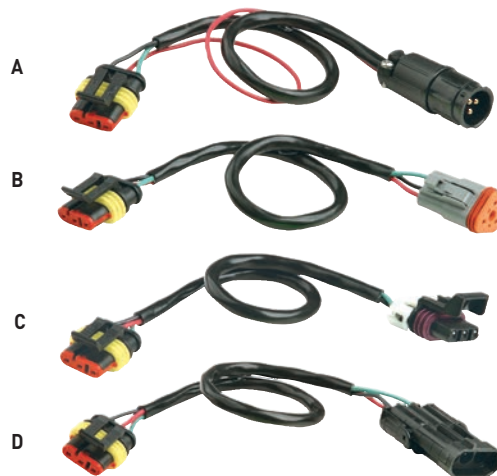

ARAG® Sprayer Control Valves



Electric Proportional Spray Control Valves

Part Number	Part Number	Series	Max.GPM*	Max.PSI*	Labyrinth Color	Open to Close	Outlet Size
463020	46463020	463	12	580	Yellow	14 seconds	3/4" HB
463020S	-	463	12	580	Gray	7 seconds	3/4" HB
463024	46463024	463	12	580	Yellow	14 seconds	3/4" HB

* Max GPM per valve section.

Available for order through HYPRO-EU only (Cambridge, UK)



Electric 3-Wire Boom Section Valve

Part Number	Series	Max.GPM*	Max.PSI*	Labyrinth Color	Open to Close	Outlet Size
463001ST	463	12	290	Blue	0.6 seconds	3/4" HB
463011ST**	463	12	290	Blue	0.6 seconds	3/4" HB
4630112ST	463	12	290	Blue	0.6 seconds	3/4" HB
473001T	473	31	290	Blue	0.6 seconds	1" HB
473011T**	473	31	290	Blue	0.6 seconds	1" HB

* Max GPM per valve section. **Include metered bypass port. Valve shown with metered bypass port.



Part Number	Part Number	Series	Max.GPM*	Max.PSI*	Outlet Size
473070	46473070	473	31	580	1 1/4" HB

* Max GPM per valve section.

Available for order through HYPRO-EU only (Cambridge, UK)



Manual Pressure Regulating Valves

Part Number	Series	Max.GPM*	Max.PSI*	Outlet Size
463080N	463	12	290	3/4" HB

* Max GPM per valve section.



Manual Boom Section Valves

Part Number	Part Number	Series	Max.GPM*	Max.PSI*	Metered Bypass	Outlet Size
463051	46463051	463	12	290	No	3/4" HB
463061	46463061	463	12	290	Yes	3/4" HB

* Max GPM per valve section.

Available for order through HYPRO-EU only (Cambridge, UK)



Series 461 - Economic Manual Valve Assemblies

Part Number	Valves*	Max.GPM*	Max.PSI*	Inlet Size	Outlet Size	Regulator
461031-1	3	12	290	1" HB	1/2" HB	No
461031-2	3	12	290	1" HB	3/4" HB	No
461031-3	3	12	290	1/2" HB	1/2" HB	No
461031-4	3	12	290	1" HB	1/2" HB	Yes
461021-1	2	12	290	1" HB	1/2" HB	No
9950-0030	3	12	290	**	**	Yes

*Includes flynut inlet and hose barb outlets in sizes indicated.

**Supplied with 3/4" elbow HB, 3/4" straight HB and 1/2" straight HB inlets and 3/4" FNPT, 3/4" HB, 1/2" HB and 3/8" HB outlets.

HYPRO[®] Sprayer Control Valves



Electric Proportional Spray Control Valves

Part Number	Max.GPM	Max.PSI	Open to Close	Outlet Size
3470-0104	26	580	7 seconds	Outlet port sold separately (See below)



Electric 3-Wire Boom Section Valves

Part Number	Max.GPM	Max.PSI	Open to Close	Outlet Size
3470-0106	12	290	0.2 seconds	Outlet port sold separately (See below)
3470-0101	12	290	0.2 seconds	Outlet port sold separately (See below)



Manual Proportional Spray Control Valves

Part Number	Max.GPM	Max.PSI	Outlet Size
3470-0103	26	580	3/4" HB



Manual Pressure Regulating Valves

Part Number	Max.GPM	Max.PSI	Outlet Size
3470-0102	26	290	Outlet port sold separately (See below)



Manual Boom Section Valves

Part Number	Max.GPM	Max.PSI	Outlet Size
3470-0107	12	290	Outlet port sold separately (See below)



Outlet Ports for Valves

Part Number	Max.GPM	Max.PSI	Outlet Size
3470-0206	12	290	3/8" HB
3470-0201	12	290	1/2" HB
3470-0202	12	290	3/4" HB
3470-0204	12	290	1" HB
3470-0203	12	290	3/4" FNPT
3470-0207	12	290	1/2" HB-90° Elbow

HYPRO[®] Sprayer Control Valves



Replacement Clips & O-rings

Part Number	Description
3470-0208	Replacement O-ring
3470-0209	Replacement clip



Valve Inlet Male Adapters

Part Number	Description
3470-0401	3/4" FNPT
3470-0402	1" FNPT



Valve Outlet Female Adapters

Part Number	Description
3470-0301	3/4" FNPT
3470-0302	1" FNPT



Other Valve Adapters

Part Number	Description
3470-0403	Male End Cap
3470-0303	Female End Cap



Bolts, Kits and Mounting Brackets

Part Number	Description
3470-0601	1 Section stainless steel
3470-0605	2 Section stainless steel
3470-0603	3 Section stainless steel
3470-0602	4 Section stainless steel
3470-0604	5 Section stainless steel



Metered Bypass Manifolds

Part Number	Description
3470-0500	3 Section



Metered Bypass Parts

Part Number	Description
3470-0900	Cap
3470-0901	Clip



Flanged Line Strainer

Part Number	Description
3470-0800	Self Cleaning, 50 Mesh



Replacement Screens for Flanged Line Strainer

Part Number	Description
3470-0801	50 Mesh



Cables

Part Number	Description
3470-0700	2 wire- 4' cable w/ gasket and screw
3470-0708	3 wire- 4' cable w/ gasket and screw
3470-0702	Din connector w/ gasket and screw



Gauge Isolators

Part Number	Description
3470-0205	Universal Isolator Kit

Ball Valves

- Fiberglass-reinforced polypropylene body for strength and chemical resistance
- Teflon seats for smooth operation and proper sealing characteristics
- EPDM O-rings to handle most fertilizers and chemicals
- Max. operating pressure for sizes up to 1-1/4" – 232 PSI (16 bar). For 1-1/2" and 2" – 145 PSI (10 bar).



Single Union Ball Valves - 2 Way

NPT Part Number	BSP Part Number	Part Number	Size	Mounting Inserts	Max PSI	Max BAR
9951-2050N	9951-2050B	56454132	1/2"	None	232	16
9951-2075N	9951-2075B	56454133	3/4"	None	232	16
9951-2100N	9951-2100B	56454134	1"	None	232	16
9951-2125N	9951-2125B	56454135	1-1/4"	8 mm	145	10
9951-2150N	9951-2150B	56454136	1-1/2"	8 mm	145	10
9951-2200N	9951-2200B	56454137	2"	8 mm	145	10

Available for order through HYPRO-EU only (Cambridge, UK)



Single Union Ball Valves - 3 Way

NPT Part Number	BSP Part Number	Part Number	Size	Mounting Inserts	Max PSI	Max BAR
9951-3050N	9951-3050B	56454232	1/2"	None	232	16
9951-3075N	9951-3075B	56454233	3/4"	None	232	16
9951-3100N	9951-3100B	56454234	1"	None	232	16
9951-3125N	9951-3125B	56454235	1-1/4"	8 mm	145	10
9951-3150N	9951-3150B	56454236	1-1/2"	8 mm	145	10
9951-3200N	9951-3200B	56454237	2"	8 mm	145	10

Available for order through HYPRO-EU only (Cambridge, UK)



Check Valves

Part Number	MGHT (inlet) x MGHT	Description	Max. PSI	Max BAR
3320-0065	1/2" X 1/2"	Polypropylene	3	.20



Shut-Off Valves

Part Number	MGHT (inlet) x MGHT	Description
3305-0112	1/2" X 1/2"	Polypropylene



Garden Hose Shut-Off Valve

Part Number	FGHT (inlet) x MGHT	Type	Description	Max. PSI	Max BAR
LA5	3/4" X 3/4"	1-Way	Cyclac body and ball with Buna-N	75	5
LA24	3/4" X (2) 3/4"	2-Way	seals suitable for outdoor use	75	5



Polypropylene Ball Valve

Part Number	Size	Max. PSI*	Max. BAR	Material	O-ring Material
15-14	1/4" X 1/4"	25	3.4	Polypropylene	EPDM

*Max psi for liquids compatible with polypropylene and EPDM.

Ball Valves



Series 90 – Plated Brass Ball Valve

Part Number	Size	Handle Type	Max PSI	Max BAR	Max. Temp	
					US Units	Metric Units
90FFB18	1/8" FNPT X 1/8" FNPT	Butterfly	300	20	212° F	100° C
90FFB14	1/4" FNPT X 1/4" FNPT	Butterfly	300	20	212° F	100° C
90FMB14	1/4" FNPT X 1/4" MNPT	Butterfly	300	20	212° F	100° C
90FFB38	3/8" FNPT X 3/8" FNPT	Butterfly	300	20	212° F	100° C
90FMB38	3/8" FNPT X 3/8" MNPT	Butterfly	300	20	212° F	100° C
90FFB12	1/2" FNPT X 1/2" FNPT	Butterfly	300	20	212° F	100° C
90FMB12	1/2" FNPT X 1/2" MNPT	Butterfly	300	20	212° F	100° C
90FFL18	1/8" FNPT X 1/8" FNPT	Lever	300	20	212° F	100° C
90FFL14	1/4" FNPT X 1/4" FNPT	Lever	300	20	212° F	100° C
90FML14	1/4" FNPT X 1/4" MNPT	Lever	300	20	212° F	100° C
90FFL38	3/8" FNPT X 3/8" FNPT	Lever	300	20	212° F	100° C
90FML38	3/8" FNPT X 3/8" MNPT	Lever	300	20	212° F	100° C
90FFL12	1/2" FNPT X 1/2" FNPT	Lever	300	20	212° F	100° C
90FML12	1/2" FNPT X 1/2" MNPT	Lever	300	20	212° F	100° C
90-HBF	Replacement nylon butterfly handle					
RI167	Replacement nylon lever handle					

Full Port Brass and 316 Stainless Steel Ball Valves



Part Number	Material	Size	Max PSI	Max Bar	Max. Temp.	
					US Units	Metric Units
171N-14	Brass	1/4" FNPT	600	41	320° F	160° C
171N-38	Brass	3/8" FNPT	600	41	320° F	160° C
171N-12	Brass	1/2" FNPT	600	41	320° F	160° C
171N-34	Brass	3/4" FNPT	600	41	320° F	160° C
171N-100	Brass	1" FNPT	600	41	320° F	160° C
171N-114	Brass	1 1/4" FNPT	600	41	320° F	160° C
171N-112	Brass	1 1/2" FNPT	600	41	320° F	160° C
171N-200	Brass	2" FNPT	600	41	320° F	160° C
78-14	316 Stainless Steel	1/4" FNPT	1000	69	320° F	160° C
78-38	316 Stainless Steel	3/8" FNPT	1000	69	320° F	160° C
78-12	316 Stainless Steel	1/2" FNPT	1000	69	320° F	160° C
78-34	316 Stainless Steel	3/4" FNPT	1000	69	320° F	160° C
78-100	316 Stainless Steel	1" FNPT	1000	69	320° F	160° C
78-114	316 Stainless Steel	1 1/4" FNPT	1000	69	320° F	160° C
78-112	316 Stainless Steel	1 1/2" FNPT	1000	69	320° F	160° C
78-200	316 Stainless Steel	2" FNPT	1000	69	320° F	160° C
78-300	316 Stainless Steel	3" FNPT	1000	69	320° F	160° C

10-32 threaded mounting holes.
Teflon seals and o-rings.

Gauges

Dual-Scale Glycerin-Filled 2-1/2" Gauges (Stainless Steel Case)



- Movement: Brass
- Bourdon Tube: Phosphor bronze
- Pointer: Black-enameled aluminum
- Dial: White background
- Window: Acrylic
- Liquid Fill: 99.5% pure virgin Glycerin
- Connection: 1/4" NPT Brass connection
- Accuracy: ASME/ANSI B40.1 Grade B (3-2-3%)

This series is designed for use with air, gas, oil, and water or any medium not corrosive to brass or bronze. Liquid-filled gauges are recommended for reducing shock waves caused by pressure or vibration fluctuations.

Order Information

Part Number	Pressure Reading Range	Face Size		Stem Size	Estimated Weight Ea.	
		US Units	Metric Units		US Units	Metric Units
2640-0009	0-60 psi/4 BAR	2-1/2"	65 mm	1/4" NPT (M)	7.5 oz.	213 g
2640-0010	0-100 psi/7 BAR					
2640-0011	0-200 psi/14 BAR					
2640-0007	0-300 psi/21 BAR					
2640-0008	0-600 psi/42 BAR					
2640-0001	0-1000 psi/70 BAR					
2640-0002	0-1500 psi/105 BAR					
2640-0003	0-2000 psi/140 BAR					
2640-0004	0-3000 psi/210 BAR					
2640-0005	0-5000 psi/350 BAR					
2640-0014	0-10000 psi/700 BAR					

Gauges

SG Series Dry 1-1/2", 2", 2-1/2" and 4" Gauges



PSI only Plastic case

This series is designed for use with air, gas, oil, and water or any medium not corrosive to brass or bronze.

- Movement: Brass
- Bourdon Tube: C Shaped in copper alloy up to 600 psi and Helical in phosphor bronze over 600 psi
- Pointer: Black-enameled aluminum
- Dial: White aluminum
- Window: Acrylic
- Connection: 1/8" NPT male standard on 1-1/2" size
1/4" NPT standard on 2", 2-1/2", & 4" sizes
- Accuracy: ASME/ANSI B40.1 Grade B (3-2-3%)

Order Information

Part Number	PSI Range	Dial Size	Stem Size
SG601.58C SG1001.58C SG1601.58C SG2001.58C	0-60 0-100 0-160 0-200	1-1/2"	1/8" CBM
SG602C SG1002C SG1602C SG2002C SG3002C	0-60 0-100 0-160 0-200 0-300	2"	1/4" CBM
SG152 SG302 SG602 SG1002 SG1602 SG2002 SG3002	0-15 0-30 0-60 0-100 0-160 0-200 0-300	2"	1/4" LM
SG15 SG30 SG60 SG100 SG160 SG200 SG300 SG400 SG600 SG1000 SG2000 SG3000 SG5000	0-15 0-30 0-60 0-100 0-160 0-200 0-300 0-400 0-600 0-1000 0-2000 0-3000 0-5000	2-1/2"	1/4" LM
SG604 SG1004 SG2004	0-60 0-100 0-200	4"	1/4" LM

GG Series Glycerin-Filled 2-1/2" and 4" Gauges



PSI only
304 Stainless Steel Case

This series is designed for use with air, gas, oil, and water or any medium not corrosive to brass or bronze. Liquid-filled gauges are recommended for reducing shock waves caused by pressure or vibration fluctuations.

- Movement: Brass
- Bourdon Tube: Phosphor bronze
- Pointer: Black-enameled aluminum
- Dial: White background
- Window: Acrylic
- Liquid Fill: 99.5% pure virgin Glycerin
- Connection: 1/4" NPT Brass connection
- Accuracy: ASME/ANSI B40.1 Grade B (3-2-3%)

Order Information

Part Number	PSI Range	Dial Size	Stem Size
WGG60C WGG100C WGG160C WGG200C WGG300C WGG400C WGG600C WGG1000C WGG1500C WGG2000C WGG3000C WGG5000C WGG6000C	0-60 0-100 0-160 0-200 0-300 0-400 0-600 0-1000 0-1500 0-2000 0-3000 0-5000 0-6000	2-1/2"	1/4" CBM & U-clamp
GG30 GG60 GG100 GG160 GG200 GG300 GG400 GG600 GG1000 GG1500 GG2000 GG3000 GG4000 GG5000 GG6000	0-30 0-60 0-100 0-160 0-200 0-300 0-400 0-600 0-1000 0-1500 0-2000 0-3000 0-4000 0-5000 0-6000	2-1/2"	1/4" LM
GG10000 GG15000	0-10000 0-15000	2-1/2"	1/4" LM
VGG30 VGG3030 VGG3060 VGG30160	VAC / 30 Hg 0-30 psi / 30 Hg 0-60 psi / 30 Hg 0-160 psi / 30 Hg	2-1/2"	1/4" LM
GG604 GG1004	0-60 0-100	4"	1/4" LM
VGG30604	0-60 psi / 30 Hg	4"	1/4" LM

Gauges

ASG Series Dry 2-1/2" and 4" Gauges for Ammonia



2-1/2" and 4" Gauges
Single Scale - PSI only
Enameled steel case

This series is designed especially for use with ammonia.

- Movement: Stainless Steel tube
- Pointer: Black-enameled aluminum
- Dial: White background
- Window: Polycarbonate
- Connection: 1/4" NPT Standard
- Accuracy: ASME/ANSI B40.1 Grade B (3-2-3 %)

Order Information

Part Number	PSI Range	Dial Size	Stem Size
ASG60	0-60	2-1/2"	1/4" LM
ASG160	0-160	2-1/2"	1/4" LM
ASG400	0-400	2-1/2"	1/4" LM
ASG604	0-60	4"	1/4" LM
ASG1604	0-160	4"	1/4" LM
ASG4004	0-400	4"	1/4" LM

Replacement lens AF available.

WGGSS Series Glycerin-Filled 2-1/2" Gauges



PSI only

This series is designed for use with air, gas, oil, and water or any medium not corrosive to stainless steel. Liquid-filled gauges are recommended for reducing shock waves caused by pressure or vibration fluctuations.

- Movement: Stainless Steel
- Bourdon Tube: 316 Stainless Steel
- Pointer: Black-enameled aluminum
- Dial: White background
- Window: Polycarbonate
- Liquid Fill: 99.5% pure virgin Glycerin
- Connection: 1/4" NPT Stainless Steel connection
2-1/2" gauges
- Accuracy: 2-1/2" - ASME/ANSI B40.1 Grade A (2-1-2 %)

Order Information

Part Number	PSI Range	Dial Size	Stem Size
WGGSS100C WGGSS400C	0-100 0-400	2-1/2"	1/4" CBM
WGGSS60 WGGSS100 WGGSS160 WGGSS400 WGGSS600 WGGSS1000 WGGSS3000 WGGSS5000	0-60 0-100 0-160 0-400 0-600 0-1000 0-3000 0-5000	2-1/2"	1/4" LM

Accessories



Order Information

Reference Number	Part Number	Description
1	MF1814B	Reducing Coupler 1/4" FNPT x 1/8" MNPT
2	B301AB	1/4" Gauge Dampener

Universal Flanged Clamps



- Clamshell designed delivers superior durability and sealing capability through an even clamping pressure around Universal Flange joints
- GTX polymer delivers superior chemical resistance and strength
- Captured bolt and nut design allows for ease of assembly and maintenance, with 10mm socket or nut driver
- Servicable design eliminates areas prone to collecting debris and excessive corrosion

Size		Fits Series	Max. Operating Pressure		Bulk Part Number Quantity: 100	Packaged Part Number	
US Units	Metric Units		at 70°F	at 21°C		1 Clamp & Gasket	5 Clamps
1"	25 mm	100	150 PSI	10 BAR	UFC0100	BG-UFC0100	5BG-UFC0100
1.5"	38 mm	200	150 PSI	10 BAR	UFC0150	BG-UFC0150	5BG-UFC0150
2"	51 mm	220	150 PSI	10 BAR	UFC0200	BG-UFC0200	5BG-UFC0200
3"	76 mm	300	125 PSI	8.6 BAR	UFC0300	BG-UFC0300	5BG-UFC0300

Universal Flanged Gaskets



- The gasket wraparound feature provides positive alignment of the adjoining fittings and allows visual inspection to be conducted during assembly
- Provides sealing areas between fitting faces and outside diameter of flanged surfaces which increases the maximum pressure the joint can manage without leaks
- Flow can be increased by as much as 16% as the new universal flanged gasket reduces protrusion into the joint

Part Number	Size		Fits Series	Gasket Type
	US Units	Metric Units		
UFG0100E	1"	25 mm	100	EPDM
UFG0150E	1.5"	38 mm	200	EPDM
UFG0200E	2"	51 mm	220	EPDM
UFG0300E	3"	76 mm	300	EPDM

Universal Flange Fittings and Valves

Universal Flange Size Reference

UF Series	100	200	220	300
US Units	1"	1.5"	2"	3"
Metric Units	25 mm	38 mm	51 mm	76 mm



Universal Flange Couplings

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100	1"	100	Coupling, Flange	150 PSI	10 BAR
UF200	2"	220	Coupling, Flange	150 PSI	10 BAR
UF300	3"	300	Coupling, Flange	125 PSI	8.6 BAR



Universal Flange Elbows

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100L	1"	100	Elbow, Flange	150 PSI	10 BAR
UF200L	2"	220	Elbow, Flange	150 PSI	10 BAR
UF300L	3"	300	Elbow, Flange	125 PSI	8.6 BAR



Universal Flange Crosses

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100X	1"	100	Cross, Flange	150 PSI	10 BAR
UF200X	2"	220	Cross, Flange	150 PSI	10 BAR
UF300X	3"	300	Cross, Flange	125 PSI	8.6 BAR

Universal Flange Fittings and Valves



Universal Flange Elbow x Hose Barbs

Part Number	Size (UF X HB)	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100L-HB075	1" x 3/4"	100	Elbow, Flange x HB	150 PSI	10 BAR
UF100L-HB100	1" x 1"	100	Elbow, Flange x HB	150 PSI	10 BAR
UF100L-HB125	1" x 1-1/4"	100	Elbow, Flange x HB	150 PSI	10 BAR
UF200L-HB150	2" x 1-1/2"	220	Elbow, Flange x HB	150 PSI	10 BAR
UF200L-HB200	2" x 2"	220	Elbow, Flange x HB	150 PSI	10 BAR
UF300L-HB200	3" x 2"	300	Elbow, Flange x HB	125 PSI	8.6 BAR
UF300L-HB300	3" x 3"	300	Elbow, Flange x HB	125 PSI	8.6 BAR



Universal Flange x Female Pipe Thread

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100-FN100	1" x 1"	100	Flange x FPT	150 PSI	10 BAR
UF200-FN200	2" x 2"	220	Flange x FPT	150 PSI	10 BAR



Universal Flange x Hose Bar

Part Number	Size (UF X HB)	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100-HB075	1" x 3/4"	100	Flange x HB	150 PSI	10 BAR
UF100-HB100	1" x 1"	100	Flange x HB	150 PSI	10 BAR
UF100-HB125	1" x 1-1/4"	100	Flange x HB	150 PSI	10 BAR
UF200-HB150	2" x 1-1/2"	220	Flange x HB	150 PSI	10 BAR
UF200-HB200	2" x 2"	220	Flange x HB	150 PSI	10 BAR
UF300-HB200	3" x 2"	300	Flange x HB	125 PSI	8.6 BAR
UF300-HB300	3" x 3"	300	Flange x HB	125 PSI	8.6 BAR



Universal Flange Flange x Male Camlock Adapter

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF200-MA200	2" x 2"	220	Flange x Male Coupler Camlock	150 PSI	10 BAR
UF300-MA300	3" x 3"	300	Flange x Male Coupler Camlock	125 PSI	8.6 BAR



Universal Flange Flange x Male pipe thread

Part Number	Size (UF X MPT)	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100-MN075	1" x 3/4"	100	Flange x MPT	150 PSI	10 BAR
UF100-MN100	1" x 1"	100	Flange x MPT	150 PSI	10 BAR
UF100-MN125	1" x 1-1/4"	100	Flange x MPT	150 PSI	10 BAR
UF200-MN200	2" x 2"	220	Flange x MPT	150 PSI	10 BAR
UF300-MN300	3" x 3"	300	Flange x MPT	125 PSI	8.6 BAR



Universal Flange Plug x Flange

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100P	1" x 1"	100	Plug, Flange	150 PSI	10 BAR
UF200P	2" x 2"	220	Plug, Flange	150 PSI	10 BAR
UF300P	3" x 3"	300	Plug, Flange	125 PSI	8.6 BAR
UF100-FN025P	1" w/ 1/4" FPT	100	Plug, Flange w/FPT	150 PSI	10 BAR



Universal Flange Reducing Coupling

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF200-RC100	2" x 1"	220 x100	Reducing Coupling Flange x Flange	150 PSI	10 BAR
UF300-RC200	3" x 2"	300 x220	Reducing Coupling Flange x Flange	125 PSI	8.6 BAR



Universal Flange Tees

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
UF100T	1"	100	Tee, Flange	150 PSI	10 BAR
UF200T	2"	220	Tee, Flange	150 PSI	10 BAR
UF300T	3"	300	Tee, Flange	125 PSI	8.6 BAR



Universal Flange Bolted Ball Valve

Part Number	Size	Fit Series	Description	Max. Operating Pressure	
				at 70°F	at 21°C
9951-2100UF	1"	100	Bolted Ball Valve with flange connections	150 PSI	10 BAR
9951-2200UF	2"	220	Bolted Ball Valve with flange connections	150 PSI	10 BAR
9951-2300UF	3"	300	Bolted Ball Valve with flange connections	125 PSI	8.6 BAR

Hose Barb with Fly Nut & O-Ring



Straight Hose Barb with Fly Nut and O-Ring

Part Number	O-Ring Groove x Hose Barb	
	US Units	Metric Units
FNAS-1212	1/2 inch x 1/2 inch	13 mm x 13 mm
FNAS-3412	3/4 inch x 1/2 inch	19 mm x 13 mm
FNAS-3458	3/4 inch x 5/8 inch	19 mm x 16 mm
FNAS-3434	3/4 inch x 3/4 inch	19 mm x 19 mm
FNAS-10012	1 inch x 1/2 inch	25 mm x 13 mm
FNAS-10034	1 inch x 3/4 inch	25 mm x 19 mm
FNAS-100100	1 inch x 1 inch	25 mm x 25 mm
FNAS-114100	1-1/4 inch x 1 inch	32 mm x 25 mm
FNAS-114114	1-1/4 inch x 1-1/4 inch	32 mm x 32 mm
FNAS-112100	1-1/2 inch x 1 inch	38 mm x 25 mm
FNAS-112114	1-1/2 inch x 1-1/4 inch	38 mm x 32 mm
FNAS-112112	1-1/2 inch x 1-1/2 inch	38 mm x 38 mm
FNAS-200200	2 inch x 2 inch	50 mm x 50 mm

Elbow Hose Barb with Fly Nut and O-Ring



Part Number	O-Ring Groove x Hose Barb	
	US Units	Metric Units
FNAE-3412	3/4 inch x 1/2 inch	19 mm x 13 mm
FNAE-3458	3/4 inch x 5/8 inch	19 mm x 16 mm
FNAE-3434	3/4 inch x 3/4 inch	19 mm x 19 mm
FNAE-10034	1 inch x 3/4 inch	25 mm x 19 mm
FNAE-100100	1 inch x 1 inch	25 mm x 25 mm
FNAE-114100	1-1/4 inch x 1 inch	32 mm x 25 mm
FNAE-114114	1-1/4 inch x 1-1/4 inch	32 mm x 32 mm
FNAE-112100	1-1/2 inch x 1 inch	38 mm x 25 mm
FNAE-112114	1-1/2 inch x 1-1/4 inch	38 mm x 32 mm
FNAE-112112	1-1/2 inch x 1-1/2 inch	38 mm x 38 mm
FNAE-200200	2 inch x 2 inch	50 mm x 50 mm

All assemblies include same size fly nut and o-ring.

Blanking CAPS



Part Number	CAP-BPS Threads
2102020	1/2"
2102030	3/4"
FNCAP-100	1"

Fittings - Cam Locks

Stainless Steel and Polypropylene Cam Lock Couplings

A. Male Adapter / Female Thread



A

Stainless Steel	Coupling Size	Thread Size	NPT Poly	BSP Poly	BSP Poly
A-750SS	3/4 inch	3/4 inch	9950-075NA	9950-075BA	02075A34
A-100SS	1 inch	1 inch	9950-100NA	9950-100BA	02100A10
-	1-1/4 inch	1-1/4 inch	9950-125NA	9950-125BA	02125A54
A-150SS	1-1/2 inch	1-1/2 inch	9950-150NA	9950-150BA	02150A64
A-200SS	2 inch	2 inch	9950-200NA	9950-200BA	02200A20
A-300SS	3 inch	3 inch	9950-300NA	9950-300BA	02300A30

Available for order through HYPRO-EU only (Cambridge, UK)

B. Female Coupler / Male Thread



B

Stainless Steel	Coupling Size	Thread Size	NPT Poly	BSP Poly	BSP Poly
B-750SS	3/4 inch	3/4 inch	9950-075NB	9950-075BB	02075B34
B-100SS	1 inch	1 inch	9950-100NB	9950-100BB	02100B10
-	1-1/4 inch	1-1/4 inch	9950-125NB	9950-125BB	02125B54
B-150SS	1-1/2 inch	1-1/2 inch	9950-150NB	9950-150BB	02150B64
B-200SS	2 inch	2 inch	9950-200NB	9950-200BB	02200B20
B-300SS	3 inch	3 inch	9950-300NB	9950-300BB	02300B30

Available for order through HYPRO-EU only (Cambridge, UK)

C. Female Coupler / Hose Fitting



C

Stainless Steel	Coupling Size	Barb Size	Poly	Poly
C-750SS	3/4 inch	3/4 inch	9950-075C	02075C34
C-100SS	1 inch	1 inch	9950-100C	02100C10
-	1-1/4 inch	1-1/4 inch	9950-125C	02125C54
C-150SS	1-1/2 inch	1-1/2 inch	9950-150C	02150C64
C-200SS	2 inch	2 inch	9950-200C	02200C20
C-300SS	3 inch	3 inch	9950-300C	02300C30

Available for order through HYPRO-EU only (Cambridge, UK)



A



B



C

Fittings - Cam Locks

Stainless Steel and Polypropylene Cam Lock Couplings

D. Female Coupler / Female Thread



D

Stainless Steel	Coupling Size	Thread Size	Poly	BSP Poly	BSP Poly
-	3/4 inch	1/2 inch	18103D2N	-----	02050D12
D-750SS	3/4 inch	3/4 inch	9950-075ND	9950-075BD	02075D34
D-100SS	1 inch	1 inch	9950-100ND	9950-100BD	02100D10
-	1-1/4 inch	1-1/4 inch	9950-125ND	9950-125BD	02125D54
D-150SS	1-1/2 inch	1-1/2 inch	9950-150ND	9950-150BD	02150D64
D-200SS	2 inch	2 inch	9950-200ND	9950-200BD	02200D20
D-300SS	3 inch	3 inch	9950-300ND	9950-300BD	02300D30



D

Available for order through HYPRO-EU only (Cambridge, UK)

E. Male Adapter / Hose Fitting



E

Stainless Steel	Coupling Size	Hose Size	Poly	Poly
-	3/4 inch	1/2 inch	18103E2	02050E12
E-750SS	3/4 inch	3/4 inch	9950-075E	02075E34
E-100SS	1 inch	1 inch	9950-100E	02100E10
-	1-1/4 inch	1-1/4 inch	9950-125E	02125E54
E-150SS	1-1/2 inch	1-1/2 inch	9950-150E	02150E64
E-200SS	2 inch	2 inch	9950-200E	02200E20
E-300SS	3 inch	3 inch	9950-300E	02300E30



E

Available for order through HYPRO-EU only (Cambridge, UK)

F. Male Adapter / Male Thread



F

Stainless Steel	Coupling Size	Thread Size	Poly	BSP Poly	BSP Poly
-	3/4 inch	1/2 inch	18103F2N	-----	02050F12
F-750SS	3/4 inch	3/4 inch	9950-075NF	9950-075BF	02075F34
F-100SS	1 inch	1 inch	9950-100NF	9950-100BF	02100F10
-	1-1/4 inch	1-1/4 inch	9950-125NF	9950-125BF	02125F54
F-150SS	1-1/2 inch	1-1/2 inch	9950-150NF	9950-150BF	02150F64
F-200SS	2 inch	2 inch	9950-200NF	9950-200BF	02200F20
F-300SS	3 inch	3 inch	9950-300NF	9950-300BF	02300F30



F

Available for order through HYPRO-EU only (Cambridge, UK)

G. Plug



G

Stainless Steel	Coupling Size	Poly	Poly
DP-750SS	3/4 inch	9950-075G	02075G34
DP-100SS	1 inch	9950-100G	02100G10
-	1-1/4 inch	9950-125G	-
DP-150SS	1-1/2 inch	9950-150G	02150G64
DP-200SS	2 inch	9950-200G	02200G20
DP-300SS	3 inch	9950-300G	02300G30



G

Available for order through HYPRO-EU only (Cambridge, UK)

H. Cap



H

Stainless Steel	Coupling Size	Poly	Poly
DC-750SS	3/4 inch	9950-075H	02075P34
DC-100SS	1 inch	9950-100H	02100P10
-	1-1/4 inch	9950-125H	-
DC-150SS	1-1/2 inch	9950-150H	02150P64
DC-200SS	2 inch	9950-200H	02200P20
DC-300SS	3 inch	9950-300H	02300P30



H

Available for order through HYPRO-EU only (Cambridge, UK)

Cam Lock Replacement Gasket



Size	EPDM Part Number	EPDM Part Number	Viton® Part Number
3/4 inch	18103B-050	02--050G	18123B-050
1 inch	18104B-050	02--100G	18124B-050
1-1/4 inch	18105B-050	-	18125B-050
1-1/2 inch	18106B-050	02--150G	18126B-050
2 inch	18107B-050	02--200G	18127B-050
3 inch	18109B-050	02--300G	18129B-050

Available for order through HYPRO-EU only (Cambridge, UK)

HYPRO[®] Nylon[®] and Polypropylene Fittings

Supplemental Technical Information on Nylon and Polypropylene Fittings



Hypro Nylon fittings are generally acceptable for use at working pressures up to 150 psi (10 bar) at ambient temperatures. At very low pressures, temperatures can approach 175°F (80° C) with no degradation in the performance of the nylon fitting. Nylon has resistance to a range of chemicals including most agricultural chemicals, ammonium compounds, detergents, diesel fuel, ethanol, gasoline, hexane, magnesium sulfate, most sodium compounds, trichloroethylene, and zinc sulfate. Nylon fittings should not be used with acidic fertilizers, bromine, chlorine, fluorine, hydrochloric acid, iodine, nitric acid, phosphoric acid, sulfuric acid, or xylene.

Recommended	Not Recommended
For physical or structural strength	Acid-based fertilizers/defoliants
For broad temperature range	Xylene-based chemicals
With PTFE tape	Prolonged sunlight/UV exposure



Hypro polypropylene fittings are generally acceptable for use at working pressures up to 150 bar (10 bar) at ambient temperatures. As with all thermoplastics, an increase in working temperature is accompanied by a decrease in acceptable operating pressure. At 140°F (60°C), the working pressure limit is 6 bar. Polypropylene has resistance to a range of chemicals including most agricultural chemicals, acidic fertilizers, ammonium compounds, calcium carbonate, ethanol, hydrochloric acid, magnesium sulfate, oxalic acid, propionic acid, phosphoric acid and most sodium compounds. Polypropylene fittings should not be used with aromatic hydrocarbons, carbon tetrachloride, gasoline, hexane, kerosene, nitric acid, sodium hypochlorite, toluene trichloroethylene, and xylene.

Recommended	Not Recommended
Hand tight, plus 1 turn	Impact wrench, other over tightening
For normal ag growing season conditions	For temperature extremes
For acid resistance	With PTFE tape
For Sunlight/UV resistance	For toluene or xylene-based compounds
For cosmetic appearance	

Male MNPT Pipe Thread By Hose Barb

Std Pack	MPT X HB	Nylon	Poly
25	1/8 inch X 3/16 inch [4,7 mm]	A18316	3A18316
25	1/8 inch X 1/4 inch [6,4 mm]	A1814	3A1814
25	1/8 inch X 5/16 inch [8 mm]	A18516	-
25	1/8 inch X 3/8 inch [10 mm]	A1838	3A1838
25	1/4 inch X 3/16 inch [4,7 mm]	A14316	-
25	1/4 inch X 1/4 inch [6,4 mm]	A14	3A14
25	1/4 inch X 5/16 inch [8 mm]	A14516	-
25	1/4 inch X 3/8 inch [8 mm]	A1438	3A1438
25	1/4 inch X 1/2 inch [13 mm]	A1412	3A1412
25	3/8 inch X 1/4 inch [6,4 mm]	A3814	3A3814
25	3/8 inch X 5/16 inch [8 mm]	A38516	3A38516
25	3/8 inch X 3/8 inch [10 mm]	A38	3A38
25	3/8 inch X 1/2 inch [13 mm]	A3812	3A3812
25	3/8 inch X 5/8 inch [16 mm]	A3858	3A3858
25	1/2 inch X 3/16 inch [4,7 mm]	A12316	-
25	1/2 inch X 1/4 inch [6,4 mm]	A1214	3A1214
25	1/2 inch X 3/8 inch [10 mm]	A1238	3A1238
25	1/2 inch X 1/2 inch [13 mm]	A12	3A12
25	1/2 inch X 5/8 inch [16 mm]	A1258	3A1258
25	1/2 inch X 3/4 inch [19 mm]	A1234	3A1234
25	1/2 inch X 1 inch [25 mm]	A12100	-
25	3/4 inch X 1/4 inch [6,4 mm]	A3414	3A3414
25	3/4 inch X 3/8 inch [10 mm]	A3438	3A3438
25	3/4 inch X 1/2 inch [13 mm]	A3412	3A3412
25	3/4 inch X 5/8 inch [16 mm]	A3458	3A3458
25	3/4 inch X 3/4 inch [19 mm]	A34	3A34
25	3/4 inch X 1 inch [25 mm]	A34100	3A34100
25	1 inch X 3/4 inch [19 mm]	A10034	3A10034
25	1 inch X 1 inch [25 mm]	A100	3A100
25	1 inch X 1 1/4 inch [32 mm]	A100114	3A100114
1	1-1/4 inch X 3/4 inch [19 mm]	A11434	3A11434
1	1-1/4 inch X 1 inch [25 mm]	A114100	3A114100
1	1-1/4 inch X 1-1/4 inch [32 mm]	A114	3A114
1	1-1/4 inch X 1-1/2 inch [38 mm]	A114112	3A114112
1	1-1/2 inch X 1-1/4 inch [32 mm]	A112114	3A112114
1	1-1/2 inch X 1-1/2 inch [38 mm]	A112	3A112
1	2 inch X 2 inch [50 mm]	A200	3A200

Add Prefix "BG" for 1 part per retail bag.

Female Pipe Thread By Hose Barb

Std Pack	FPT X HB	Nylon	Poly
25	1/4 inch X 1/4 inch [6,4 mm]	AF14	3AF14
25	1/4 inch X 3/8 inch [10 mm]	AF1438	3AF1438
25	3/8 inch X 1/4 inch [6,4 mm]	AF3814	3AF3814
25	3/8 inch X 3/8 inch [10 mm]	AF38	3AF38
25	3/8 inch X 1/2 inch [13 mm]	AF3812	3AF3812
25	1/2 inch X 1/4 inch [6,4 mm]	AF1214	3AF1214
25	1/2 inch X 3/8 inch [10 mm]	AF1238	3AF1238
25	1/2 inch X 1/2 inch [13 mm]	AF12	3AF12
25	1/2 inch X 5/8 inch [16 mm]	AF1258	3AF1258
25	1/2 inch X 3/4 inch [19 mm]	AF1234	3AF1234
25	3/4 inch X 3/8 inch [10 mm]	AF3438	3AF3438
25	3/4 inch X 1/2 inch [13 mm]	AF3412	3AF3412
25	3/4 inch X 5/8 inch [16 mm]	-	3AF3458
25	3/4 inch X 3/4 inch [19 mm]	AF34	3AF34

Elbows: Male Pipe Thread By Hose Barb

Std Pack	MPT X HB	Nylon	Poly
25	1/8 inch X 3/16 inch [4,7 mm]	EL18316	-
25	1/8 inch X 1/4 inch [6,4 mm]	EL1814	3EL1814
25	1/8 inch X 5/16 inch [8 mm]	EL18516	-
25	1/8 inch X 3/8 inch [10 mm]	EL1838	3EL1838
25	1/4 inch X 3/16 inch [4,7 mm]	-	3EL14316
25	1/4 inch X 1/4 inch [6,4 mm]	EL14	3EL14
25	1/4 inch X 5/16 inch [8 mm]	EL14516	-
25	1/4 inch X 3/8 inch [10 mm]	EL1438	3EL1438
25	1/4 inch X 1/2 inch [13 mm]	EL1412	3EL1412
25	1/4 inch X 5/8 inch [16 mm]	EL1458	-
25	3/8 inch X 1/4 inch [6,4 mm]	EL3814	3EL3814
25	3/8 inch X 5/16 inch [8 mm]	EL38516	-
25	3/8 inch X 3/8 inch [10 mm]	EL38	3EL38
25	3/8 inch X 1/2 inch [13 mm]	EL3812	3EL3812
25	3/8 inch X 5/8 inch [16 mm]	EL3858	3EL3858
25	1/2 inch X 1/4 inch [6,4 mm]	EL1214	3EL1214
25	1/2 inch X 3/8 inch [10 mm]	EL1238	3EL1238
25	1/2 inch X 1/2 inch [13 mm]	EL12	3EL12
25	1/2 inch X 5/8 inch [16 mm]	EL1258	3EL1258
25	1/2 inch X 3/4 inch [19 mm]	EL1234	3EL1234
25	1/2 inch X 1 inch [25 mm]	EL12100	-
25	3/4 inch X 1/4 inch [6,4 mm]	EL3414	3EL3414
25	3/4 inch X 3/8 inch [10 mm]	EL3438	3EL3438
25	3/4 inch X 1/2 inch [13 mm]	EL3412	3EL3412
25	3/4 inch X 5/8 inch [16 mm]	EL3458	3EL3458
25	3/4 inch X 3/4 inch [19 mm]	EL34	3EL34
25	3/4 inch X 1 inch [25 mm]	EL34100	3EL34100
25	1 inch X 1/2 inch [13 mm]	EL10012	3EL10012
25	1 inch X 3/4 inch [19 mm]	EL10034	3EL10034
25	1 inch X 1 inch [25 mm]	EL100	3EL100
1	1-1/4 inch X 3/4 inch [19 mm]	EL11434	3EL11434
1	1-1/4 inch X 1 inch [25 mm]	EL114100	3EL114100
1	1-1/4 inch X 1 1/4 inch [32 mm]	EL114	3EL114
1	1-1/4 inch X 1 1/2 inch [38 mm]	EL114112	3EL114112
1	1-1/2 inch X 1 1/2 inch [38 mm]	EL112	3EL112
1	2 inch X 2 inch [50 mm]	EL200	3EL200

Add Prefix "BG" for 1 part per retail bag.

Elbows: Female Pipe Thread By Hose Barb

Std Pack	FPT X HB	Nylon	Poly
25	1/4 inch X 3/16 inch [4,7 mm]	-	3EL14316F
25	1/4 inch X 1/4 inch [6,4 mm]	EL14F	3EL14F
25	1/4 inch X 3/8 inch [10 mm]	EL1438F	3EL1438F
25	3/8 inch X 1/4 inch [6,4 mm]	EL3814F	3EL3814F
25	3/8 inch X 3/8 inch [10 mm]	EL38F	3EL38F
25	3/8 inch X 1/2 inch [13 mm]	EL3812F	3EL3812F
25	1/2 inch X 5/8 inch [16 mm]	EL1258F	3EL1258F
25	1/2 inch X 3/4 inch [19 mm]	EL1234F	3EL1234F
25	3/4 inch X 1/2 inch [13 mm]	EL3412F	3EL3412F
25	3/4 inch X 5/8 inch [16 mm]	EL3458F	3EL3458F
25	3/4 inch X 3/4 inch [19 mm]	EL34F	3EL34F

Street Elbows: Female Pipe Thread By Male Pipe Thread

Std Pack	FPT X MPT	Nylon	Poly
25	1/4 inch X 1/4 inch	SE14	3SE14
25	3/8 inch X 3/8 inch	SE38	3SE38
25	1/2 inch X 1/2 inch	SE12	3SE12
25	3/4 inch X 3/4 inch	SE34	3SE34
10	1 inch X 1 inch	SE100	3SE100
1	1 1/4 inch X 1 1/4 inch	SE114	3SE114
1	1 1/2 inch X 1 1/2 inch	SE112	3SE112
1	2 inch X 2 inch	SE200	3SE200

Add Prefix "BG" for 1 part per retail bag.

Add Prefix "5BG" for 5 parts per retail bag.



Street Elbows – 45°

Std Pack	MPT X FPT	Nylon	Poly
25	3/4 inch X 3/4 inch	SE3445	3SE3445
10	1/4 inch X 1/4 inch	SE1445	–



Elbows: Female Pipe Thread – 90°

Std Pack	FPT X FPT	Nylon	Poly
25	1/2 inch X 1/2 inch	LL12	3LL12
10	3/4 inch X 3/4 inch	LL34	3LL34
1	1 inch X 1 inch	LL100	3LL100
1	1 1/4 inch X 1 1/4 inch	LL114	3LL114
1	1 1/2 inch X 1 1/2 inch	LL112	3LL112
1	2 inch X 2 inch	LL200	3LL200



Tees: Female Pipe Thread

Std Pack	FPT X FPT X FPT	Nylon	Poly
25	1/4 inch	TT14	3TT14
10	1/2 inch	TT12	3TT12
10	3/4 inch	TT34	3TT34
1	1 inch	TT100	3TT100
1	1 1/4 inch	TT114	3TT114
1	1 1/2 inch	TT112	3TT112
1	2 inch	TT200	3TT200



Tees: Female Pipe Thread with 1/4 inch Gauge Port

Std Pack	FPT X FPT X FPT	Nylon	Poly
25	1/2 inch	GTT1214	3GTT1214
1	3/4 inch	GTT3414	3GTT3414

Add Prefix "BG" for 1 part per retail bag.



Reducer Bushings

Std Pack	MPT X FPT	Nylon	Poly
25	1/4 inch X 1/8 inch	—	3RB1418
25	3/8 inch X 1/8 inch	RB3818	3RB3818
25	3/8 inch X 1/4 inch	RB3814	3RB3814
25	1/2 inch X 1/8 inch	RB1218	3RB1218
25	1/2 inch X 1/4 inch	RB1214	3RB1214
25	1/2 inch X 3/8 inch	RB1238	3RB1238
25	3/4 inch X 1/8 inch	RB3418	3RB3418
25	3/4 inch X 1/4 inch	RB3414	3RB3414
25	3/4 inch X 3/8 inch	RB3438	3RB3438
25	3/4 inch X 1/2 inch	RB3412	3RB3412
25	1 inch X 1/2 inch	RB10012	3RB10012
25	1 inch X 3/4 inch	RB10034	3RB10034
1	1-1/4 inch X 3/4 inch	RB11434	3RB11434
1	1-1/4 inch X 1 inch	RB114100	3RB114100
1	1-1/2 inch X 3/4 inch	RB11234	3RB11234
1	1-1/2 inch X 1 inch	RB112100	3RB112100
1	1-1/2 inch X 1-1/4 inch	RB112114	3RB112114
1	2 inch X 3/4 inch	RB20034	3RB20034
1	2 inch X 1 inch	RB200100	3RB200100
1	2 inch X 1-1/4 inch	RB200114	3RB200114
1	2 inch X 1-1/2 inch	RB200112	3RB200112
1	2-1/2 inch X 2 inch	—	—
1	3 inch X 2 inch	RB300200	3RB300200

Add Prefix "BG" for 1 part per retail bag.
Add Prefix "5BG" for 5 parts per retail bag.



Nipples: Male Pipe Thread By Male Pipe Thread

Std Pack	MPT X MPT	Nylon	Poly
25	1/8" X 1/8"	M18	3M18
25	1/4" X 1/4"	M14	3M14
25	3/8" X 3/8"	M38	3M38
25	1/2" X 1/2"	M12	3M12
25	3/4" X 3/4"	M34	3M34
25	1" X 1"	M100	3M100
1	1-1/4" X 1-1/4"	M114	3M114
1	1-1/2" X 1-1/2"	M112	3M112
1	2" X 2"	M200	3M200
25	1/4" X 1/8"	M1418	3M1418
25	3/8" X 1/8"	M3818	3M3818
25	3/8" X 1/4"	M3814	3M3814
25	1/2" X 1/8"	M1218	—
25	1/2" X 1/4"	M1214	3M1214
25	1/2" X 3/8"	M1238	3M1238
25	3/4" X 3/8"	M3438	3M3438
25	3/4" X 1/2"	M3412	3M3412

Female Coupler

Std Pack	FPT X FPT	Nylon	Poly
25	1/2" X 1/2"	FC12	3FC12
25	3/4" X 3/4"	FC34	3FC34
25	1" X 1"	FC100	3FC100
1	1-1/4" X 1-1/4"	FC114	3FC114
1	1-1/2" X 1-1/2"	FC112	3FC112
1	2" X 2"	FC200	3FC200

Hex Plug with Male Pipe Thread

Std Pack	MPT	Nylon	Poly
25	1/8"	F18	3F18
25	1/4"	F14	3F14
25	3/8"	F38	3F38
25	1/2"	F12	3F12
25	3/4"	F34	3F34
25	1"	F100	3F100
1	1-1/4"	F114	3F114
1	1-1/2"	F112	3F112
1	2"	F200	3F200

Hose Barb Fittings

Std Pack	HB X HB		Nylon	Poly
	US Units	Metric Units		
25	1/4" X 1/4"	6,4 x 6,4 mm	EL14HB	3EL14HB
25	3/8" X 1/4"	10 x 6,4 mm	EL3814HB	3EL3814HB
25	3/8" X 3/8"	10 x 10 mm	EL38HB	3EL38HB
25	1/2" X 1/4"	13 x 6,4 mm	EL1214HB	3EL1214HB
25	1/2" X 3/4"	10 x 19 mm	EL1238HB	3EL1238HB
25	1/2" X 1/2"	10 x 10 mm	EL12HB	3EL12HB
25	5/8" X 5/8"	16 x 16 mm	EL58HB	3EL58HB
25	3/4" X 5/8"	19 x 16 mm	EL3458HB	3EL3458HB
25	3/4" X 3/4"	19 x 19 mm	EL34HB	3EL34HB
25	1" X 1"	25 x 25 mm	EL100HB	—
1	1-1/4" X 1-1/4"	32 x 32 mm	EL114HB	3EL114HB
1	1-1/2" X 1-1/2"	38 x 38 mm	EL112HB	3EL112HB
1	2" X 2"	50 x 50 mm	EL200HB	3EL200HB

Hose Mender

Std Pack	HB X HB		Nylon	Poly
	US Units	Metric Units		
25	1/8" x 1/8"	3,2 x 3,2 mm	HM18*	-
25	1/4" x 3/16"	6,4 x 4,7 mm	HM14316*	-
25	1/4" x 1/4"	6,4 x 6,4 mm	SHM14	3SHM14
25	1/4" x 1/4"	6,4 x 6,4 mm	HM14*	3HM14*
25	5/16" x 5/16"	8 x 8 mm	HM516*	3HM516*
25	3/8" x 1/4"	10 x 6,4 mm	HM3814*	3HM3814*
25	3/8" x 3/8"	10 x 10 mm	SHM38	3SHM38
25	1/2" x 1/4"	13 x 6,4 mm	HM1214*	3HM1214*
25	1/2" x 3/8"	13 x 10 mm	SHM1238	3SHM1238
25	1/2" x 3/8"	13 x 10 mm	HM1238*	3HM1238*
25	1/2" x 1/2"	13 x 13 mm	SHM12	3SHM12
25	1/2" x 5/8"	13 x 16 mm	SHM1258	3SHM1258
25	5/8" x 3/8"	16 x 10 mm	HM5838*	3HM5838*
25	5/8" x 5/8"	16 x 16 mm	SHM58	3SHM58
25	5/8" x 5/8"	16 x 16 mm	HM58*	-
25	3/4" x 3/4"	19 x 19 mm	SHM34	3SHM34
25	1" x 1"	25 x 25 mm	SHM100	3SHM100
1	1-1/4" x 1-1/4"	32 x 32 mm	SHM114	3SHM114
1	1-1/2" x 1-1/2"	38 x 38 mm	SHM112	3SHM112
1	2" x 2"	50 x 50 mm	SHM200	3SHM200

*No centre stop as pictured,

**Tees: Hose Barb By Female Pipe Thread**

Std Pack	FPT X HB (1 x 2 & 3)	Nylon	Poly
25	3/4" X 3/4" (19 mm)	T34F	3T34F

Male Garden Hose Thread By Hose Barb

Std Pack	MGHT X HB	Nylon	Poly
25	3/4" X 1/4" (6.4 mm)	D3414	-
25	3/4" X 3/8" (10 mm)	D3438	3D3438
25	3/4" X 1/2" (13 mm)	D3412	3D3412
25	3/4" X 5/8" (16 mm)	D3458	3D3458
25	3/4" X 3/4" (19 mm)	D34	3D34
25	3/4" X 1" (25 mm)	D34100	-

Add Prefix "BG-" for 1 part per retail bag

Elbows: Male Garden Hose Thread By Hose Barb

Std Pack	MGHT X HB	Nylon	Poly
25	3/4" X 1/4" (6.4 mm)	ELD3414	3ELD3414
25	3/4" X 3/8" (10 mm)	ELD3438	3ELD3438
25	3/4" X 1/2" (13 mm)	ELD3412	3ELD3412
25	3/4" X 5/8" (16 mm)	ELD3458	-
25	3/4" X 3/4" (19 mm)	ELD34	3ELD34

Adapters: Male Garden Hose Thread By Male Pipe Thread

Std Pack	MGHT X MPT	Nylon	Poly
25	3/4" X 3/8"	E3438	3E3438
25	3/4" X 1/2"	E3412	3E3412
25	3/4" X 3/4"	E34	3E34

Adapter Couplings: Female Garden Hose Thread By Female Pipe Thread

Std Pack	FGHT X FPT	Nylon	Poly
25	3/4" X 1/2"	J3412	3J3412

Tees: Hose Barbs

Std Pack	HB X HB (1 X 2,3)		Nylon	Poly
	US Units	Metric Units		
25	1/8" X 1/8"	3,2 x 3,2 mm	T18	-
25	1/4" X 1/4"	6,4 x 6,4 mm	T14	3T14
25	1/4" X 3/8"	6,4 x 10 mm	T1438	3T1438
25	3/8" X 3/8"	10 x 10 mm	T38	3T38
25	3/8" X 1/2"	10 x 13 mm	T3812	3T3812
25	3/8" X 5/8"	10 x 16 mm	T3858	-
25	1/2" X 3/8"	13 x 10 mm	T1238	3T1238
25	1/2" X 1/2"	13 x 13 mm	T12	3T12
25	5/8" X 5/8"	16 x 16 mm	T58	3T58
25	3/4" X 1/2"	19 x 13 mm	T3412	3T3412
25	3/4" X 3/4"	19 x 19 mm	T34	3T34
25	1" X 1"	25 x 25 mm	T100	3T100
1	1-1/4" X 1-1/4"	32 x 32 mm	T114	3T114
1	1-1/2" X 1-1/2"	38 x 38 mm	T112	3T112
1	2" X 2"	50 x 50 mm	T200	3T200

**Tees: Male Pipe Thread By Hose Barbs**

Std Pack	MPT X HB (1 X 2,3)	Nylon	Poly
25	1/8" X 1/4" (6.4 mm)	T1814T	-
25	1/4" X 1/4" (6.4 mm)	T14T	3T14T
25	1/4" X 3/8" (16 mm)	T1438T	3T1438T
25	1/4" X 1/2" (13 mm)	T1412T	-
25	3/8" X 1/4" (6.4 mm)	T3814T	-
25	3/8" X 3/8" (10 mm)	T38T	3T38T
25	3/8" X 1/2" (13 mm)	T3812T	3T3812T
25	1/2" X 3/8" (10 mm)	T1238T	3T1238T
25	1/2" X 1/2" (13 mm)	T12T	3T12T
25	1/2" X 5/8" (16 mm)	T1258T	-
25	1/2" X 3/8" (19 mm)	T1234T	3T1234T
25	3/4" X 3/8" (10 mm)	-	3T3438T
25	3/4" X 1/2" (13 mm)	T3412T	3T3412T
25	3/4" X 5/8" (16 mm)	-	3T3458T
25	3/4" X 3/4" (19 mm)	T34T	3T34T
25	3/4" X 1" (25 mm)	T34100T	-

**Adapters: Female Garden Hose Thread By Male Pipe Thread**

Std Pack	FGHT X MPT	Nylon	Poly
25	3/4" X 3/4"	H34	3H34

Adapters: Male Garden Hose Thread By Female Pipe Thread

Std Pack	MGHT X FPT	Nylon	Poly
25	3/4" X 1/2"	G3412	3G3412
25	3/4" X 1/4"	G3414	3G3414
25	3/4" X 3/4"	G34	3G34

Adapters: Flat Seat by Male Pipe Thread

Std Pack	MPT	Nylon	Poly
25	1/2"	C12NPT	3C12NPT

Adapters: Female Garden Hose Thread By Male Garden Hose Thread

Std Pack	FGHT X MGHT	Nylon	Poly
25	3/4" X 3/4"	I34	3I34

Female Garden Hose Cap Knurled

Std Pack	FGHT	Nylon	Poly
25	3/4"	N34	3N34

Female Pipe Thread By Hose Barb Fitting

Std Pack	FPT X HB	Nylon	Poly
25	1/2" X 1/2" (13 mm)	Q12	3Q12
50	1/4" X 1/4" (6.4 mm)	Q14	3Q14

Female Pipe Straight Swivel Nut-Hex

Std Pack	FPS	Nylon	Poly
25	1"	B100	3B100

Female Garden Hose and Female Pipe Straight Swivel Nut-Knurled

Std Pack	FGHT	FPS	Nylon	Poly
25	3/4"	-	B34	3B34
25	-	3/4"	B35	3B35

Flat Seat Hose Barb

Std Pack	HB		Nylon	Poly
	US Units	Metric Units		
25	1/4"	6.4 mm	C14	3C14
25	3/8"	10 mm	C38	3C38
25	1/2"	13 mm	C12	3C12
25	5/8"	16 mm	C58	3C58
25	3/4"	19 mm	C34	3C34
25	1"	25 mm	C100	3C100

Female Thread Swivel Hex Nut, Barb Insert with Ball Seat

Std Pack	Size		Nylon
	US Units	Metric Units	
BARB ONLY			
50	1/4" HB	6.4 mm	NC14
50	3/8" HB	10 mm	NC38
50	1/2" HB	13 mm	NC12
NUT ONLY			
50	1/4"	13 mm	NC14N
50	3/8"	10 mm	NC38N
50	1/2"	13 mm	NC12N
50	1/2" with 1/4" HB	13 mm with 6.4 mm HB	NC1214

Washers

Reference #	Std Pack	OD X ID	Description	Part Number
1	100	1" X 3/4"	Black Vinyl	W406V
2	100	1" X 5/8"	S.S. Filter 50/60 Mesh	W160M
3	100	1" X 1/2"	Natural Polypropylene	W405P

Rope Wick Parts Unassembled

Std Pack	Description	Nylon	Poly
25	3/4" MGHT X 3/4" MPT (A)	E34	3E34
25	3/4" FGHT Nut with 1/2" hole (B)	B3412	3B3412
25	3/4" MGHT X 1/2" MPT (C)	E3412	3E3412

Rope Wick Parts Unassembled

Ref. Letter	Std Pack	Description	Nylon	Poly
A	100	Nylon Washer	RW1116A	3RW1116A
B	50	Main Body	RW1116B	-
C	100	O-ring Black EPDM	RW1116C	RW1116C
D	100	Grommet Black EPDM	RW1116D	RW1116D
E	25	1-1/16" - 16 UN (Lock) Nut	B12	3B12
F	25	1-1/16" - 16 UN Swivel Nut	8027	38027

Hose-Saver Straight Assembly - Nylon

MPT X HB	Part Number	Cap Part Number
3/4" X 3/4" (19 mm)	626320N	626012
3/4" X 1" (25 mm)	626325N	626014
1" X 3/4" (19 mm)	626420N	626012
1" X 1" (25 mm)	626425N	626014
1-1/4" X 1" (25 mm)	626525N	626014
1-1/4" X 1-1/4" (32 mm)	626532N	626014
1-1/2" X 1-1/4" (32 mm)	626632N	626014
1-1/2" X 1-1/2" (38 mm)	626638N	626016
1-1/2" X 2" (50 mm)	626651N	-
2" X 2" (50 mm)	626751N	-

Hose-Saver Elbow Assembly - Nylon

MPT X HB	Part Number	Cap Part Number
3/4" X 3/4" (19 mm)	627320N	626012
3/4" X 1" (19 mm)	627325N	626014
1" X 3/4" (19 mm)	627420N	626012
1" X 1" (19 mm)	627425N	626014
1" X 1-1/4" (19 mm)	627432N	626014
1-1/4" X 1" (19 mm)	627525N	626014
1-1/4" X 1-1/4" (19 mm)	627532N	626014
1-1/2" X 1-1/4" (19 mm)	627632N	626014
1-1/2" X 1-1/2" (19 mm)	627638N	626016
1-1/2" X 2" (19 mm)	627651N	-
2" X 2" (19 mm)	627751N	-

Male Pipe Thread By Hose Barb

MPT x HB	316 Stainless Steel
1/4" X 1/4" (6.4 mm)	9A14
1/4" X 3/8" (10 mm)	9A1438
1/4" X 1/2" (13 mm)	9A1412
3/8" X 3/8" (10 mm)	9A38
3/8" X 1/2" (13 mm)	9A3812
1/2" X 1/2" (13 mm)	9A12
3/4" X 3/4" (19 mm)	9A34
1" X 1" (25 mm)	9A100
1-1/4" X 1-1/4" (32 mm)	9A114
1-1/2" X 1-1/2" (38 mm)	9A112
2" X 2" (50 mm)	9A200
3" X 3" (75 mm)	9A300

**Street Elbow:****Female Pipe Thread By Male Pipe Thread**

MPT X FPT	304 Stainless Steel
1/4" X 1/4"	7SE14
3/8" X 3/8"	7SE38
1/2" X 1/2"	7SE12
3/4" X 3/4"	7SE34
1" X 1"	7SE100
1-1/2" X 1-1/2"	7SE112
1-1/4" X 1-1/4"	7SE114
2" X 2"	7SE200
3" X 3"	7SE300

Coupling: Female Pipe Thread

FPT X FPT	304 Stainless Steel
1/4" X 1/4"	7FC14
1/2" X 1/2"	7FC12
3/4" X 3/4"	7FC34
1" X 1"	7FC100
1-1/2" X 1-1/2"	7FC112
2" X 2"	7FC200
3" X 3"	7FC300

**Tee: Female Pipe Thread**

FPT X FPT X FPT	304 Stainless Steel
1/4"	7TT14
1/2"	7TT12
3/4"	7TT34
1"	7TT100
1-1/4"	7TT114
1-1/2"	7TT112
2"	7TT200
3"	7TT300

Elbow: Female Pipe Thread – 90°

FPT X FPT	304 Stainless Steel
1/4" X 1/4"	7LL14
1/2" X 1/2"	7LL12
3/4" X 3/4"	7LL34
1" X 1"	7LL100
1-1/2" X 1-1/2"	7LL112
1-1/4" X 1-1/4"	7LL114
2" X 2"	7LL200
3" X 3"	7LL300

**Reducer Bushing**

MPT X FPT	304 Stainless Steel
1/4" X 3/8"	7RB1418
3/8" X 1/4"	7RB3814
1/2" X 1/4"	7RB1214
1/2" X 3/8"	7RB1238
3/4" X 1/4"	7RB3414
3/4" X 1/2"	7RB3412
1" X 1/2"	7RB10012
1" X 3/4"	7RB10034
2" X 1-1/2"	7RB200112

Nipple

MPT X Length	304 Stainless Steel
1/4" X 1-1/2"	714112
1/4" X 3"	714300
1/4" X 4"	714400
1/4" X 6"	714600
1/4" X 12"	7141200
3/8" X 1"	738100
3/8" X 1-1/2"	738112
1/2" X 1-1/8"	712118
1/2" X 1-1/2"	712112
1/2" X 2"	712200
3/4" X 1-3/8"	734138
3/4" X 4"	734400
1" X 1-1/2"	7100112
1" X 4"	7100400
1-1/4" X 1-5/8"	7114158
1-1/2" X 1-3/4"	7112134
2" X 2"	7200200
2" X 2-1/2"	7200212
2" X 4"	7200400
2" X 6"	7200600
2" X 3"	7200300
2" X 3-1/2"	7200312
2" X 5"	7200500

Hex Plugs

Part Number	Size
7F18	1/8"
7F14	1/4"
7F38	3/8"
7F12	1/2"
7F34	3/4"
7F100	1"
7F200	2"



Fittings - Steel



Male Pipe Thread By Hose Barb

MPT X HB	Steel
1/8" X 1/4" [6.4 mm]	A1814S
1/8" X 3/8" [10 mm]	A1838S
1/4" X 1/4" [6.4 mm]	A14S
1/4" X 3/8" [10 mm]	A1438S
1/4" X 1/2" [13 mm]	A1412S
3/8" X 1/4" [6.4 mm]	A3814S
3/8" X 3/8" [10 mm]	A38S
3/8" X 1/2" [13 mm]	A3812S
1/2" X 1/4" [6.4 mm]	A1214S
1/2" X 3/8" [10 mm]	A1238S
1/2" X 1/2" [13 mm]	A12S
1/2" X 5/8" [16 mm]	A1258S
1/2" X 3/4" [19 mm]	A1234S
3/4" X 3/8" [10 mm]	A3438S
3/4" X 1/2" [13 mm]	A3412S
3/4" X 5/8" [16 mm]	A3458S
3/4" X 3/4" [19 mm]	A34S
3/4" X 1" [25 mm]	A34100S
1" X 1" [25 mm]	A100S

Add Prefix "BG-" for 1 part per retail bag.



King Nipple

MPT X HB	Plated Steel
3/4" [19 mm]	AA34P
1" X 3/4" [19 mm]	AA10034P
1" [25 mm]	AA100P
1-1/4" [32 mm]	AA114P
1-1/2" [38 mm]	AA112P
2" [50 mm]	AA200P

Add Prefix "BG-" for 1 part per retail bag.



Female Pipe Straight Swivel Nut - Hex

FPS	Steel
3/4"	B35S

NOTE: For use with steel flat hose barbs 1/4" to 3/4".



Street Elbows:

Female Pipe Thread By Male Pipe Thread

MPT X FPT	Brass
1/4" X 1/4"	SE14B
3/8" X 3/8"	SE38B
1/2" X 1/2"	SE12B



Flat Seat Hose Barb

HB	Steel
1/2" [12 mm]	C12S
3/4" [19 mm]	C34S



Hose Mender

HB	Brass
1/4" [6.4 mm] X 1/4" [6.4 mm]	SHM14B
3/8" [10 mm] X 3/8" [10 mm]	SHM38B
1/2" [12 mm] X 1/2" [12 mm]	SHM12B
5/8" [16 mm] X 5/8" [16 mm]	SHM58B
3/4" [19 mm] X 3/4" [19 mm]	SHM34B

Fittings - Brass



Male Pipe Thread By Hose Barb

MPT X HB	Brass
1/8" X 1/4" [6.4 mm]	A1814B
1/8" X 3/8" [10 mm]	A1838B
1/4" X 1/4" [6.4 mm]	A14B
1/4" X 3/8" [10 mm]	A1438B
1/4" X 1/2" [13 mm]	A1412B
3/8" X 1/4" [6.4 mm]	A3814B
3/8" X 3/8" [10 mm]	A38B
3/8" X 1/2" [13 mm]	A3812B
1/2" X 1/4" [6.4 mm]	A1214B
1/2" X 3/8" [10 mm]	A1238B
1/2" X 1/2" [13 mm]	A12B
1/2" X 5/8" [16 mm]	A1258B
1/2" X 3/4" [19 mm]	A1234B
3/4" X 3/8" [10 mm]	A3438B
3/4" X 1/2" [13 mm]	A3412B
3/4" X 5/8" [16 mm]	A3458B
3/4" X 3/4" [19 mm]	A34B
3/4" X 1" [25 mm]	A34100B
1" X 1" [25 mm]	A100B



Female Pipe Thread By Hose Barb

FPT X HB	Brass
1/4" X 3/8" [10 mm]	AF1438B



Flat Seat Hose Barb

HB	Brass
3/8" (10 mm)	C38B
1/2" (13 mm)	C12B
5/8" (16 mm)	C58B
3/4" (19 mm)	C34B



Swivel Nut Hex Female Garden Hose Thread

FGHT	Brass
3/4"	B33B

Couplings: Female Pipe Thread



FPT X FPT	Brass
1/4" X 1/4"	FC14B
1/2" X 1/2"	FC12B



Male Garden Hose Thread By Hose Barb

MGHT X HB	Brass
3/4" X 3/8" (10 mm)	D3438B
3/4" X 1/2" (13 mm)	D3412B
3/4" X 5/8" (16 mm)	D3458B
3/4" X 3/4" (19 mm)	D34B



Swivel Adapter

MPT	Brass
3/8"	SA38B
1/2"	SA12B



Adapters: Male Garden Hose Thread By Male Pipe Thread

MGHT X MPT	Brass
3/4" X 1/2"	E3412B
3/4" X 3/4"	E34B



Elbows: Female Pipe Thread – 90°

FPT X FPT	Brass
1/4" X 1/4"	LL14B
1/8" X 1/8"	LL18B



Hex Plug with Male Pipe Thread

MPT	Brass
1/4"	F14B
3/8"	F38B
1/2"	F12B



Reducer Bushings

MPT X FPT	Brass
1/4" X 1/8"	RB1418B
1/2" X 1/4"	RB1214B
1/2" X 3/8"	RB1238B
3/4" X 1/2"	RB3412B



Female Garden Hose Swivel Nut – Knurled

FGHT	Brass
3/4"	B34B

NOTE: For use with flat seat hose barbs 1/4" to 3/4".

Cable Ties and Clamps



Cable Ties

Standard Pack	Length		Part Number White Nylon	Part Number Black UV Nylon
	US Units	Metric Units		
100	4 inch	102 mm	NS4	3NS4
100	6-1/8 inch	156 mm	NS7	3NS7
100	7-1/2 inch	170 mm	NS8	3NS8
100	11-1/2 inch	292 mm	NS12	3NS12
100	17-3/4 inch	450 mm	NS17	3NS17
100	21-3/4 inch	552 mm	NS21	3NS21
100	28-3/8 inch	720 mm	NS28	3NS28
100	37-1/4 inch	946 mm	NS32	3NS32



NOTE: 10 per box – order in box multiples

Hose Clamps

Part Number	Fits Hose Min		Fits Hose Max		Normal Hose Size*	
5/16 inch BAND						
4JM	7/32 inch	5,6 mm	5/8 inch	16 mm	1/4 inch	6,4 mm
6JM	5/16 inch	8 mm	7/8 inch	22 mm	3/8 inch	10 mm
8JM	7/16 inch	11 mm	1 inch	25 mm	1/2 inch	13 mm
10JM	1/2 inch	13 mm	1 1/16 inch	27 mm	5/8 inch	16 mm
12JM	9/16 inch	14 mm	1 1/4 inch	32 mm	3/4 inch	19 mm
16JM	1 1/16 inch	18 mm	1 1/2 inch	38 mm	1 inch	25 mm
1/2 inch BAND						
6J	3/8 inch	10 mm	7/8 inch	22 mm	3/8 inch	10 mm
8J	7/16 inch	11 mm	1 inch	25 mm	1/2 inch	13 mm
10J	9/16 inch	14 mm	1- 1/16 inch	27 mm	5/8 inch	16 mm
12J	9/16 inch	14 mm	1- 1/4 inch	32 mm	3/4 inch	19 mm
16J	1 1/16 inch	18 mm	1- 1/2 inch	38 mm	1 inch	25 mm
20J	3/4 inch	19 mm	1- 3/4 inch	44 mm	1- 1/4 inch	32 mm
24J	1- 1/16 inch	27 mm	2 inch	50 mm	1- 1/2 inch	38 mm
28J	1- 5/16 inch	33 mm	2- 1/4 inch	57 mm	1- 3/4 inch	44 mm
32J	1- 9/16 inch	40 mm	2- 1/2 inch	64 mm	2 inch	50 mm
36J	1- 13/16 inch	46 mm	2- 3/4 inch	70 mm	2- 1/4 inch	57 mm
40J	2- 1/16 inch	52 mm	3 inch	76 mm	2- 1/2 inch	64 mm
44J	2- 5/16 inch	59 mm	3- 1/4 inch	83 mm	2- 3/4 inch	70 mm
48J	2- 9/16 inch	65 mm	3- 1/2 inch	89 mm	3 inch	76 mm
52J	2- 13/16 inch	71 mm	3- 3/4 inch	95 mm	3- 1/4 inch	83 mm
56J	3- 1/16 inch	78 mm	4 inch	102 mm	3- 1/2 inch	89 mm
64J	3- 1/2 inch	89 mm	4- 1/2 inch	114 mm	4 inch	102 mm
104J	5 inch	127 mm	7 inch	178 mm	6- 1/2 inch	165 mm

* Hose sizes are based on inside I.D.

Sealant




Rector Seal

Part Number	Type	Container	
		US Units	Metric Units
28651	21 Black Jack	1/2 Pint Can	.24 Litre
28541	21 Black Jack	1 Pint Can	.47 Litre



Liquid Teflon Sealant

Part Number	Size		Container
	US Units	Metric Units	
LT2	2 oz.	59 mL	Tube
LT4	4 oz.	118 mL	Can
LT8	8 oz.	237 mL	Can



Teflon Tape

Part Number	Size		Container
	US Units	Metric Units	
1252	1/2"	13 mm	520"

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
002201-3430	204	02300E30	217	1520-1125SS	193	166-200-46	92
002201-3440	204	02300F30	217	1520-1150	193	166-200-56	92
002201-3460	204	02300G30	217	1520-1150SS	193	166-200-57	92
002201-3470	204	02300P30	217	1521C-65	44	16J	226
006320	204	104J	226	1521C-65M	44	16JM	226
006330	204	10AEE930003	171	1522C-65SP	45	16Q2530TC	175
0113434307	192	10BG-1700-0255	150, 174, 191	152607TC	175	1700-0044	201
0113434308	192	10BG-30-DC-00	150	1530-0024S	50	1700-0045	201
01134343010	192	10BG-30-DC-01	150, 153	1530-0028S	50	1700-0057	201
01W5HR13	106	10BG-30-DC010	150	1532C-160HSP	53	1700-0058	201
02--050G	217	10BG-30-DC-015	150, 153	1532C-65P	53	1700-0064	201
02--100G	217	10BG-30-DC018	150	1533C-13ESP	53	1700-0065	201
02--150G	217	10BG-30-DC-02	150, 153	1533C-13SP	53	1700-0090	200
02--200G	217	10BG-30-DC023	150	1533C-390EHSP	53	1700-0091	200
02--300G	217	10BG-30-DC-03	150, 153	1534	78	1700-0092	200
02050D12	217	10BG-30-DC-035	150	1535	79	1700-0255	117
02050E12	217	10BG-30-DC-04	150, 153	1536	46	1700C	64
02050F12	217	10BG-30-DC-05	150, 153	1536-SP	47	1700N	64
02075A34	216	10BG-30-DC-06	150, 153	1537	46	1700XL	64
02075B34	216	10BG-30-DC-07	150, 153	1537-SP	47	171N-100	211
02075C34	216	10BG-30-DC-08	150, 153	1538	44, 46	171N-112	211
02075D34	217	10BG-30-DC-10	150, 153	1538-SP	45, 47	171N-114	211
02075E34	217	10BG-30-DC-12	150, 153	1539	46	171N-12	211
02075F34	217	10J	226	1539-SP	47	171N-14	211
02075G34	217	10JM	226	1540	46	171N-200	211
02075P34	217	1212S18	171	1540-SP	47	171N-34	211
02100A10	216	1252	226	1541A-SP	56	171N-38	211
02100B10	216	12J	226	1542A-160HSP	56	1721-0010	106
02100C10	216	12JM	226	1542A-550BSP	56	1721-0220	188
02100D10	217	1320-0015	66, 67	1542A-65SP	56	1723-0142	188
02100E10	217	1320-0016	66, 67	1542P-160HSP	55	1802C	103
02100F10	217	1320-0076	66, 67	1542P-200HSP	55	1803C	103
02100G10	217	1320-0077	66, 67	1542P-550BSP	55	1804C	103
02100P10	217	1320-0078	66, 67	1542P-55SP	55	1805C	103
02125A54	216	1320-0079	66, 67	1542P-65ESP	55	1806C	103
02125B54	216	1320-0080	66, 67	1542P-65SP	55	1807C	103
02125C54	216	1320-0081	66, 67	1542P-65SPM	55	18103B-050	217
02125D54	217	1323-0072	66, 67	1542P-950BSP	55	18103D2N	217
02125E54	217	1323-0073	66, 67	1543A-160HSP	56	18103E2	217
02125F54	217	1323-0074	66, 67	1543A-160HTSE	56	18103F2N	217
02150A64	216	1323-0075	66, 67	1543A-65SP	56	18104B-050	217
02150B64	216	1323-0076	66, 67	1543A-65TSP	56	18105B-050	217
02150C64	216	1323-0077	66, 67	1543P-130ESP	52	18106B-050	217
02150D64	217	141418	171	1543P-130ESP-01	52	18107B-050	217
02150E64	217	1442P-65SP	55	1543P-130SP	52	18109B-050	217
02150F64	217	15-14	210	1543P-390EHSP	52	181-101	95
02150G64	217	1502C	65	1550	48	18123B-050	217
02150P64	217	1502N	65	1550-BSP	48	18124B-050	217
02200A20	216	1502XL	65	1550-SP	48	18125B-050	217
02200B20	216	1510-0001	81	1551	44, 48	18126B-050	217
02200C20	216	1510-0002	81	1551-BSP	45	18127B-050	217
02200D20	217	1510-0005	81	1551-SP	45, 48	18129B-050	217
02200E20	217	1510-0016	81	1552C-130	44	1824C	103
02200F20	217	1510-0075	81	1552C-130E	44	1825C	103
02200G20	217	1520-0034	51	1552C-130ESP	45	1826C	103
02200P20	217	1520-1075	193	1552C-130SP	45	1827C	103
02300A30	216	1520-1075SS	193	1572-SPX	57	203282152	200
02300B30	216	1520-1100	193	1573-SPX	57	203282153	200
02300C30	216	1520-1100SS	193	15Q2530TC	175	203282162	200
02300D30	217	1520-1125	193	166-200-36	92	203282163	200

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
2032821535	200	234-2946	96	2738-1004	68	3010-0068	66
2032821635	200	234-3916	96	2739-1001	68	3010-0084	51
2087-593-135	90	234-3926	96	2739-1002	68	3010-0167	51
2088-313-145	90	234-3936	96	2739-1003	68	3010-0168	51
2088-343-135	90	234-3946	96	2739-1004	68	3011-0006	66
2088-343-170	91	2404-0419	106	2739-1005	68	3011-0021	66
2088-343-500	91	2404-0427	106	2739-1006	68	301AF0.4-65	171
2088-394-144	91	244-3366	96	2739-1009	68	301AF0.7-80	171
2088-394-154	91	244-5126	96	2740-1001	68	301AF0.7-80W	171
2088-443-144	90	244-6128	96	2740-1002	68	301AF1.2-105C	171
20J	226	24J	226	2740-1005	68	301AF1.6-100	171
20N62230	200	251032BL	170	2740-1007	68	301AF5.0-70	171
20N62250	200	251032GY	170	2741-1001	68	301AFD0.7-80	171
20N62280	200	251032WH	170	2741-1002	68	301AFD1.2-105	171
20N62330	200	2525-0035	190	2741-1003	68	301AFD1.6-100	171
20N62350	200	2526-0011	51	2741-1004	68	301AFUSA0.5	171
20N62380	200	2541-0045	110	2741-1005	68	301AFUSA1.0	171
20N62430	200	2541-0046	110	2741-1007	68	301AFUSA2.0	171
20N62450	200	2541-0048	110	2801-0001	81	301AFUSA3.0	171
20N62480	200	2541-0049	110	2801-0002	81	301MNF-W	171
20N62530	200	2541-0050	110	28541	226	3020-0008	51
20N62550	200	2541-0051	110	28651	226	3020-0009	51, 66
20N62580	200	2541-0053	110	28J	226	3021-0006	185
20N62630	200	2541-0054	110	28OC02	164	3040-0010	175
20N62650	200	2541-0055	110	28OC03	164	30B4SNF70E35	197
20N62680	200	2541-0065	110	28OC04	164	30-CR-13	153
2102020	216	2549-0042	110	28OC06	164	30-CR-23	153
2102030	216	2549-0043	110	28OC08	164	30-CR-25	153
2130P-A055	104	255-223	95	28OC12	164	30-CR-45	153
2130P-A079	104	255-246	95	28OC16	164	30DB015F120	119
2130P-D183	104	255-313	95	38027	192, 222	30DB025F120	119
2130P-D355	104	255-323	95	383818	171	30DB02F120	119
2130P-D359	104	255-413	95	3023834	175	30DB03F120	119
2130P-D395	104	255-568	95	3502420	195	30DB04F120	119
2130P-D399	104	255-613	95	3502440	195	30DB05F120	119
2130PX	104	255-623	95	3502460	195	30DB06F120	119
2132P-D183	105	255-646	95	3522000	195	30DT0.5	143
2132P-D355	105	2640-0001	211	3522040	195	30DT0.75	143
2132P-D359	105	2640-0002	211	3522060	195	30DT1.0	143
2132P-D395	105	2640-0003	211	3522100	195	30DT1.5	143
2132P-D399	105	2640-0004	211	3522120	195	30DT10	143
2132PX	105	2640-0005	211	3522140	195	30DT15	143
2133P-D355	105	2640-0007	211	3522160	195	30DT2.0	143
2133P-D395	105	2640-0008	211	3522221	195	30DT2.5	143
2133PX	105	2640-0009	211	3E34	221, 222	30DT20	143
2150P-D05AC	106	2640-0010	211	3000-350	93	30DT3.0	143
2150P-D35DC	106	2640-0011	211	3010-000	95	30DT4.0	143
2150P-D39DC	106	2640-0014	211	3010-0001	66	30DT5.0	143
2150PX	106	27101612	171	3010-0002	66	30DT7.5	143
2160-0038	81	2728-1001	68	3010-0003	66	30FCX02	161
2160-0047	81	2729-1001	68	3010-0004	66	30FCX03	161
2160-0048	81	2729-1002	68	3010-0005	66	30FCX04	161
2270-0136	174	2729-1003	68	3010-0006	66	30FCX05	161
22W11MF64	119, 123, 125, 129, 131, 133, 136, 139, 147, 167, 174, 175, 191	2729-1005	68	3010-0010	66	30FCX06	161
		2729-1006	68	3010-0014	66	30HAF007-80	170
		27302489	170	3010-0020	66	30HAF01110	170
				3010-0061	51	30HAF01480	170
22W11MF64V	174, 175	27302492	170	3010-0064	51	30HAF01570	170
234-2916	96	2738-1001	68	3010-0066	51, 66	30HAF01-65	170
234-2926	96	2738-1002	68	3010-0067	51, 66	30HCX10	155
234-2936	96	2738-1003	68				

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
30HCX12	155	3350-0059	201	3350-0153B	200	3351-0042	200
30HCX18	155	3350-0059A	200	3350-0153N	200	3351-0043	200
30HCX2	155	3350-0060	201	3350-0154B	200	3371	197
30HCX3	155	3350-0061	201	3350-0154N	200	3371-0019	197
30HCX4	155	3350-0062	201	3350-0155B	200	3371-0028	197
30HCX6	155	3350-0068	201	3350-0155N	200	3371-0034S	199
30HCX8	155	3350-0069	201	3350-0156B	200	3371-0036	199
30HCX9	155	3350-0071	201	3350-0156N	200	3371-0036R	199
30PFAF008-80	171	3350-0071A	200	3350-0157B	200	3371-0037R	199
30PFAF008-80BL	171	3350-0072	201	3350-0157N	200	3371-0038	199
30PFAF013-105	171	3350-0072A	200	3350-0158B	200	3371-0038R	199
30PFAF013-105BL	171	3350-0073	201	3350-0158N	200	3371-0039R	199
30PFCM002F80	171	3350-0073A	200	3350-0159B	200	3371-0040	199
30PFCM002F80BL	171	3350-0074	201	3350-0159N	200	3371-0040R	199
30PFCM005F80	171	3350-0075	201	3350-0160B	200	3371-0041R	199
30PFCM005F80BL	171	3350-0076	201	3350-0160N	200	3375-0025	106
30Q3579A	121	3350-0077	201	3350-0161B	200	3375P-05T4	198
30Q3834	131	3350-0079	201	3350-0161N	200	3375P-05T5	198
32100200	171	3350-0079A	200	3350-0162B	200	3375P-05T7	198
32100510	175	3350-0079F	201	3350-0162N	200	3375P-05T7-K	198
32100530	175	3350-0082	201	3350-0163B	200	3376-0870	198
32100550	175	3350-0082A	200	3350-0163N	200	3376-0871	198
32195Q3269	171	3350-0082F	201	3350-0164B	200	3376-1170	198
32J	226	3350-0085	201	3350-0164N	200	3376-1171	198
32PIFA250	171	3350-0085A	200	3350-0165B	200	3376-1670	198
3300-0001	68, 106	3350-0085F	201	3350-0165N	200	3376-1671	198
3300-0002	68, 106	3350-0112	201	3350-0166B	200	3381-0010	203
3300-0015	68, 106	3350-0112A	200	3350-0166N	200	3381-0011	203
3300-0016	68, 106	3350-0113	201	3350-0167B	200	3381-0013	203
3300-0082	84	3350-0113A	200	3350-0167N	200	3381-0016	202
3300-0087	84	3350-0114	201	3350-0168B	200	3381-0021	202
3300-0088	84	3350-0114A	200	3350-0168N	200	3381-0036	202
3300-0093	68	3350-0115	201	3350-0169B	200	3381-0043	202
3300-0094	68	3350-0116	201	3350-0169N	200	3381-0043L	202
3300-0098	68, 106	3350-0117	201	3350-0170B	200	33812D	192
3301-0001	68, 106	3350-0131	201	3350-0170N	200	3385-1500	203
3305-0112	210	3350-0132	201	3350-0171B	200	3385-2300	203
3316-0002	68	3350-0142B	200	3350-0171N	200	3385-3000	203
3320-0064	99	3350-0142N	200	3350-0172B	200	3385-3500	203
3320-0065	210	3350-0143B	200	3350-0172N	200	3385-4000	203
3350-0032	201	3350-0143N	200	3350-0173B	200	3385-4500	203
3350-0034	201	3350-0144B	200	3350-0173N	200	3385-5000	203
3350-0034A	200	3350-0144N	200	3351-0005	201	3385-5500	203
3350-0035	201	3350-0145B	200	3351-0006	201	3385-6000	203
3350-0035A	200	3350-0145N	200	3351-0007	201	3385-7000	203
3350-0040	201	3350-0146B	200	3351-0013	201	338D	192
3350-0040A	200	3350-0146N	200	3351-0014	201	3390-0062D	106
3350-0042	201	3350-0147B	200	3351-0015	201	33942	192
3350-0043	201	3350-0147N	200	3351-0016	201	34-006	95
3350-0043A	200	3350-0148	198	3351-0020	201	34-007	95
3350-0044	201	3350-0148B	200	3351-0022	201	3410-0039	189
3350-0045	201	3350-0148N	200	3351-0024	201	3410-0040	198
3350-0046	201	3350-0149B	200	3351-0026	201	3410-0041	55, 57
3350-0046A	200	3350-0149N	200	3351-0035	200	3410-0042	52, 57
3350-0056	201	3350-0150B	200	3351-0036	200	3410-0043	189
3350-0056A	200	3350-0150N	200	3351-0037	200	3410-0044	189
3350-0057	201	3350-0151B	200	3351-0038	200	3420-0003	66
3350-0057A	200	3350-0151N	200	3351-0039	200	3420-0004	66
3350-0058	201	3350-0152B	200	3351-0040	200	3420-0010	66
3350-0058A	200	3350-0152N	200	3351-0041	200	3420-0023	66

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
3420-0024	66	3430-0791	56	3522060-1	195	3A12	219
3420-0025	66	3430-0792	56	3522100-1	195	3A1214	219
3430-0037	100	3430-0793	56	3522120-020	195	3A1234	219
3430-0332	13, 14, 15, 18, 23, 24, 25, 26, 28, 36, 37, 41, 42, 44, 45, 46, 47	3430-0797	51	3522120-1	195	3A1238	219
		3430-0806	198	3522140-020	195	3A1258	219
		3430-0807	198	3522140-1	195	3A14	219
3430-0333	11, 20, 21, 22, 42	3430-0823	198	3522160-020	195	3A1412	219
3430-0334	9, 10	3430-0840V	185	3522160-1	195	3A1438	219
3430-0380	66	3470-0101	207	3522221-1	195	3A1814	219
3430-0381	66	3470-0102	207	354230	194	3A18316	219
3430-0384	66	3470-0103	207	356040	196	3A1838	219
3430-0386	66	3470-0104	207	356041	196	3A200	219
3430-0387	66	3470-0106	207	356060	196	3A34	219
3430-0390	66	3470-0107	207	356061	196	3A34100	219
3430-0437	66	3470-0201	207	356240	196	3A3412	219
3430-0445	32	3470-0202	207	356241	196	3A3414	219
3430-0456	51	3470-0203	207	356260	196	3A3438	219
3430-0464	44, 45, 48	3470-0204	207	356261	196	3A3458	219
3430-0476	42	3470-0205	209	356640-020NB	196	3A38	219
3430-0477	42	3470-0206	207	356660-020NB	196	3A3812	219
3430-0478	42	3470-0207	207	36J	226	3A3814	219
3430-0479	42	3470-0208	208	3800-0025	200, 201	3A38516	219
3430-0480SP	10, 15, 30, 41	3470-0209	208	3800-0026	200, 201	3A3858	219
3430-0481SP	17, 35	3470-0301	208	3800-0029	200, 201	3AF12	219
3430-0482SP	15, 47	3470-0302	208	3800-0040	200, 201	3AF1214	219
3430-0500	34	3470-0303	208	3800-0041	200, 201	3AF1234	219
3430-0537	16, 17	3470-0401	208	3800-0042	200, 201	3AF1238	219
3430-0540	66, 68	3470-0402	208	3800-0043	200, 201	3AF1258	219
3430-0589	13, 14, 15, 18, 23, 24, 25, 26, 28, 30, 36, 37, 41, 42, 44, 45, 46, 47, 49	3470-0403	208	3800-0044	200, 201	3AF14	219
		3470-0500	209	3800-0045	200, 201	3AF1438	219
		3470-0601	208	3800-0046	200, 201	3AF34	219
3430-0590	11, 20, 21, 22, 42, 49	3470-0602	208	3800-0047	200, 201	3AF3412	219
3430-0591	9, 10, 49	3470-0603	208	3800-0048	200, 201	3AF3438	219
3430-0592	51	3470-0604	208	3800-0065	200, 201	3AF3458	219
3430-0593	32, 49	3470-0605	208	3800-0066	200, 201	3AF38	219
3430-0594	198	3470-0700	209	3800-0067	200, 201	3AF3812	219
3430-0596	198	3470-0702	209	3800-0086	200	3AF3814	219
3430-0601	34, 35, 49	3470-0708	209	3800-0087	200	3B100	106, 222
3430-0604	19, 38, 40, 49	3470-0800	209	3800-0088	200	3B12	192, 222
3430-0633	106	3470-0801	209	3800-0089	200	3B34	222
3430-0634	106	3470-0900	209	3800-0090	200	3B3412	222
3430-0635	55	3470-0901	209	3800-0091	200	3B35	222
3430-0636	66	350401	195	3800-0092	200	3C100	222
3430-0644	16, 17, 49	350420-020	195	3800-0093	200	3C12	222
3430-0650	51	350440-020	195	3800-0094	200	3C12NPT	222
3430-0659	55	350460-020	195	3800-0095	200	3C14	222
3430-0673CSP	53	350480	195	3800-0096	200	3C34	222
3430-0674CSP	53	350480-020	195	3800-0097	200	3C38	222
3430-0675	53	350620-020	195	3812D	192	3C58	222
3430-0676	53	350640	195	38D	192	3D34	221
3430-0690	55	350640-020	195	3942	192	3D3412	221
3430-0691	55	350660	195	3A100	219	3D3438	221
3430-0692	52	350680	195	3A100114	219	3D3458	221
3430-0700	50	350680-020	195	3A10034	219	3E3412	221, 222
3430-0754	188	352000-020	195	3A112	219	3E3438	221
3430-0754V	188	352080	195	3A112114	219	3EL100	219
3430-0755	188	352080-1	195	3A114	219	3EL10012	219
3430-0755V	188	352180	195	3A114100	219	3EL10034	219
3430-0757	52	352180-1	195	3A114112	219	3EL112	219
3430-0768	202	3522040-1	195	3A11434	219		
3430-0779	12						

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
3EL112HB	220	3F34	220	3NTL14	192	3T1238T	221
3EL114	219	3F38	220	3NTL34	192	3T12C	192
3EL114100	219	3FC100	220	3NTL38	192	3T12T	221
3EL114112	219	3FC112	220	3NTL58	192	3T14	221
3EL11434	219	3FC114	220	3NTT12	192	3T1438	221
3EL114HB	220	3FC12	220	3NTT34	192	3T1438T	221
3EL12	219	3FC200	220	3NTT38	192	3T14T	221
3EL1214	219	3FC34	220	3NTT58	192	3T200	221
3EL1214HB	220	3G34	221	3Q12	222	3T34	221
3EL1234	219	3G3412	221	3Q14	222	3T3412	221
3EL1234F	219	3G3414	221	3R12	197	3T3412T	221
3EL1238	219	3GTT1214	220	3RB10012	220	3T3438T	221
3EL1238HB	220	3GTT3414	220	3RB10034	220	3T3458T	221
3EL1258	219	3H34	221	3RB112100	220	3T34C	192
3EL1258F	219	3HM1214	221	3RB112114	220	3T34F	221
3EL12HB	220	3HM1238	221	3RB11234	220	3T34T	221
3EL14	219	3HM14	221	3RB114100	220	3T38	221
3EL1412	219	3HM3814	221	3RB11434	220	3T3812	221
3EL14316	219	3HM516	221	3RB1214	220	3T3812T	96, 221
3EL14316F	219	3HM5838	221	3RB1218	220	3T38C	192
3EL1438	219	3I34	222	3RB1238	220	3T38T	221
3EL1438F	219	3J3412	221	3RB1418	220	3T58	221
3EL14F	219	3K8412	192	3RB200100	220	3TT100	220
3EL14HB	220	3K8414	192	3RB200112	220	3TT112	220
3EL1814	219	3K8438	192	3RB200114	220	3TT114	220
3EL1838	219	3LL100	220	3RB20034	220	3TT12	220
3EL200	219	3LL112	220	3RB300200	220	3TT14	220
3EL200HB	220	3LL114	220	3RB3412	220	3TT200	220
3EL34	219	3LL12	220	3RB3414	220	3TT34	220
3EL34100	219	3LL200	220	3RB3418	220	400059	191
3EL3412	219	3LL34	220	3RB3438	220	400059P	191
3EL3412F	219	3M100	220	3RB3814	220	400069	191
3EL3414	219	3M112	220	3RB3818	220	400069P	191
3EL3438	219	3M114	220	3RW1116A	222	4001C	60
3EL3458	219	3M12	220	3SE100	219	4001C-H	60
3EL3458F	219	3M1214	220	3SE112	219	4001N	60
3EL3458HB	220	3M1238	220	3SE114	219	4001N-E2H	61
3EL34F	219	3M14	220	3SE12	219	4001N-EH	61
3EL34HB	220	3M1418	220	3SE14	219	4001N-H	60
3EL38	219	3M18	220	3SE200	219	4001XL	60
3EL3812	219	3M200	220	3SE34	219	4001XL-E2H	61
3EL3812F	219	3M34	220	3SE3445	220	4001XL-EH	61
3EL3814	219	3M3412	220	3SE38	219	4001XL-H	60
3EL3814F	219	3M3438	220	3SHM100	221	402105-030	174
3EL3814HB	220	3M38	220	3SHM112	221	4081B0N	191
3EL3858	219	3M3814	220	3SHM114	221	40867BN	191
3EL38F	219	3M3818	220	3SHM12	221	40868BN	191
3EL38HB	220	3N34	222	3SHM1238	221	40J	226
3EL58HB	220	3NB1612	192	3SHM1258	221	4101C	60
3ELD34	221	3NB1614	192	3SHM14	221	4101C-25	65
3ELD3412	221	3NF1614	192	3SHM200	221	4101C-H	60
3ELD3414	221	3NS12	226	3SHM34	221	4101N	60
3ELD3438	221	3NS17	226	3SHM38	221	4101N-E2H	61
3F100	220	3NS21	226	3SHM58	221	4101N-EH	61
3F112	220	3NS28	226	3T100	221	4101N-H	60
3F114	220	3NS32	226	3T112	221	4101XL	60
3F12	220	3NS4	226	3T114	221	4101XL-25	65
3F14	220	3NS7	226	3T12	221	4101XL-E2H	61
3F18	220	3NS8	226	3T1234T	221	4101XL-EH	61
3F200	220	3NTL12	192	3T1238	221	4101XL-H	60

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
4111-035	92	4214-2508V	185	4241N-B121D	187	430001	191
413003	193	4221N-B122	186	4241N-B121S	187	430002	191
413004	193	4221N-B122V	186	4241N-B121T	187	430201	191
413005	193	4221N-B123	186	4241N-B122D	187	430201V	191
413013	193	4221N-B123V	186	4241N-B122S	187	430202	191
413014	193	4221N-B124	186	4241N-B122T	187	430202V	191
413015	193	4221N-B124V	186	4241N-B123D	187	44J	226
413016	193	4221N-B127	186	4241N-B123S	187	461021-1	206
413018	193	4221N-B127V	186	4241N-B123T	187	461031-1	206
4200-0004E	190	4221N-B128	186	4242N-B300	187	461031-2	206
4200-0004V	190	4221N-B128V	186	4242N-B322D	187	461031-3	206
4200-0010	190	4222N-B322	186	4242N-B322S	187	461031-4	206
4200-0010V	190	4222N-B323	186	4242N-B322T	187	4621AA10000	205
4200-0015N	193	4222N-B324	186	4242N-B323D	187	4621AA10000-100	205
4200-0016N	193	4223N-B322	186	4242N-B323S	187	4621AA11313	205
4200-0019	193	4223N-B322V	186	4242N-B323T	187	4621AA20000	205
4200-0020	190	4223N-B323	186	4243N-B322	187	4621AA30000	205
4200-0020V	190	4223N-B323V	186	4243N-B322V	187	4621AA31414	205
4200-0025	190	4223N-B324	186	4243N-B323	187	4621AA40000	205
4200-0030	190	4223N-B324V	186	4243N-B323V	187	4621AA41414	205
4200-0030V	190	4223N-B327	186	4243N-B324	187	4621AA41515	205
4200-0040	190	4223N-B327V	186	4243N-B324V	187	4621BA01313	205
4200-0040V	190	4223N-B328	186	4243N-B327	187	4621BA11313	205
4200-0050	190	4223N-B328V	186	4243N-B327V	187	4621BA41414	205
4200-0050V	190	4223N-B522	186	4243N-B328	187	4622AA40000	205
4200-0060	174, 191	4223N-B522V	186	4243N-B328V	187	4622AA50000	205
4200-0061	174, 191	4223N-B523	186	4243N-B522	187	4622AA51616	205
4200-0062	174, 191	4223N-B523V	186	4243N-B522V	187	4622AA61717	205
4200-0063	174, 191	4223N-B524	186	4243N-B523	187	4622BA50000-100	205
4200-0111N	187	4223N-B524V	186	4243N-B523V	187	4622BA50000-200	205
4200-0112N	187	4223N-B527	186	4243N-B524	187	4622BA51616	205
4200-0113N	187	4223N-B527V	186	4243N-B524V	187	4622BA61717	205
4200-0114N	187	4223N-B528	186	4243N-B527	187	463001ST	206
4200-0115N	187	4223N-B528V	186	4243N-B527V	187	4630112ST	206
4200-0211N	187	4231N-B101D	188	4243N-B528	187	463011ST	206
4200-0212N	187	4231N-B101S	188	4243N-B528V	187	463020	206
4200-0213N	187	4231N-B101T	188	4247N-B111	191	463020S	206
4200-0214N	187	4231N-B102D	188	4247N-B119	191	463024	206
4200-0215N	187	4231N-B102S	188	4247N-B121	191	463051	206
4200N-0017	174, 193	4231N-B102T	188	4247N-B129	191	463061	206
4200N-0018	174, 193	4231N-B103D	188	4247N-C111	191	473070	206
4200N-0020	191	4231N-B103S	188	4247N-C119	191	463080N	206
4200N-0021	191	4231N-B103T	188	4247N-C121	191	464621AA10000	205
4200N-0023	191	4240N-B010	188	4247N-C129	191	464621AA20000	205
4200N-0024	191	4240N-B010V	188	4263N-B323D	187	464621AA30000	205
4200N-0025	191	4240N-B020	188	4263N-B323DV	187	464621AA4000	205
4200N-0026	191	4240N-B020V	188	4263N-B323S	187	464621AA43434	205
4201N-B102	188	4240N-B121D	188	4263N-B323SV	187	464622AA51616	205
4201N-B103	188	4240N-B121S	188	4263N-B324D	187	464622AA61717	205
4201N-B104	188	4240N-B122D	188	4263N-B324DV	187	464622BA51616	205
4211-035	92	4240N-B122S	188	4263N-B324S	187	464622BA61717	205
4214-1502V	185	4240N-B123D	188	4263N-B324SV	187	46463020	206
4214-1503V	185	4240N-B123S	188	4263N-B523D	187	46463024	206
4214-1504V	185	4240N-F110	188	4263N-B523DV	187	46463051	206
4214-1507V	185	4240N-F110V	188	4263N-B523S	187	46463061	206
4214-1508V	185	4240N-F120	188	4263N-B523SV	187	46473070	206
4214-2502V	185	4240N-F120V	188	4263N-B524D	187	473001T	206
4214-2503V	185	4240N-F150	188	4263N-B524DV	187	473011T	206
4214-2504V	185	4240N-F150V	188	4263N-B524S	187	48J	226
4214-2507V	185	4241N-B120U	188	4263N-B524SV	187	4JM	226

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
500615-060	197	626532N	222	7560N	62	7TT114	223
502069	197	626632N	222	7560N-GM15	63	7TT12	223
504203-HYP	197	626638N	222	7560N-GM30	63	7TT14	223
504210	197	626651N	222	7560XL	62	7TT200	223
5059-1310-D011	85	626751N	222	7560XL-GM15	63	7TT300	223
5059-1311-D011	85	627320N	222	7560XL-GM30	63	7TT34	223
5059-3610-D011	85	627325N	222	7700C	64	8000-0056	82
5059-3611-D011	85	627420N	222	7700N	64	8000-343-236	86
506530V	204	627425N	222	7700XL	64	8000-513-236	88
506531V	204	627432N	222	78-100	211	8000-533-236	88
506532V	204	627525N	222	78-112	211	8000-533-250	88
520004	193	627532N	222	78-114	211	8000-541-236	86
5206C	100	627632N	222	78-12	211	8000-542-136	86
5206C-H	100	627638N	222	78-14	211	8000-543-136	86
5210C	100	627651N	222	78-200	211	8000-543-138	86
5210C-H	100	627751N	222	78-300	211	8000-543-210	87
52169	197	64J	226	78-34	211	8000-543-220	87
52520005	193	6500C	62	78-38	211	8000-543-236	86
52J	226	6500N	62	7F100	223	8000-543-238	86
5315C-HX	101	6500XL	62	7F12	223	8000-543-250	87
5315C-X	101	65-B5205	121, 141, 147, 174	7F14	223	8000-543-290	87
5320C-HX	101	65MN011X1.3	175	7F18	223	8000-543-936	86
5320C-X	101	65VBS0113-13	175	7F200	223	8000-643-236	86
5321C	102	65-VBS205	174	7F34	223	8-005-01	96
5321C-H	102	6J	226	7F38	223	8-006-01	96
5322C	102	6JM	226	7FC100	223	8006-543-250	87
5322C-H	102	712112	223	7FC112	223	8-007-01	96
5324C	101	712118	223	7FC12	223	8007-543-836	89
5324C-H	101	712200	223	7FC14	223	8007-543-850	89
5325C-HX	101	714112	223	7FC200	223	8007-591-236	89
5325C-X	101	714300	223	7FC300	223	8007-593-836	89
5330C-HX	101	714400	223	7FC34	223	8007-593-850	89
5330C-X	101	714600	223	7LL100	223	80112-F-00PP	192
53702	102	734138	223	7LL112	223	801-F-00PP	192
53703	103	734400	223	7LL114	223	8020-503-250	88
56454132	210	738100	223	7LL12	223	8020-833-238	88
56454133	210	738112	223	7LL14	223	8027	192, 222
56454134	210	7100112	223	7LL200	223	8030-813-239	86
56454135	210	7100400	223	7LL300	223	8030-863-239	88
56454136	210	7112134	223	7LL34	223	8034-F-00PP	192
56454137	210	7114158	223	7RB10012	223	8050-305-426	95
56454232	210	7141200	223	7RB10034	223	8090-212-246	88
56454233	210	7200200	223	7RB1214	223	8090-801-278	88
56454234	210	7200212	223	7RB1238	223	8090-802-289	88
56454235	210	7200300	223	7RB1418	223	8090-902-278	88
56454236	210	7200312	223	7RB200112	223	8095-902-260	88
56454237	210	7200400	223	7RB3412	223	8-126-00	96
56J	226	7200500	223	7RB3414	223	8-145-00	96
5BG-UFC0100	214	7200600	223	7RB3814	223	8-150-01	96
5BG-UFC0150	214	7433-2502	189	7SE100	223	8-205-00	96
5BG-UFC0200	214	7433-2503	189	7SE112	223	8304B	108
5BG-UFC0300	214	7433-2601	189	7SE114	223	8304B-HM5C	108
626012	222	7433-2608	189	7SE12	223	8304BV	108
626014	222	7433-2610	189	7SE14	223	8-727-00	99
626016	222	7433-2613	189	7SE200	223	8J	226
626320N	222	7433-3314	189	7SE300	223	8JM	226
626325N	222	7433-3316	189	7SE34	223	90029	9
626420N	222	7560C	62	7SE38	223	90-02F110	168
626425N	222	7560C-GM15	63	7TT100	223	90-03F110	168
626525N	222	7560C-GM30	63	7TT112	223	90-04F110	168

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
90-05F110	168	90LD06F110	169	9303S-HM2C-SP	30	9403P-540S	42
9006C-O	9	9202C	13	9303S-HM3C	28	9403S-1000	42
9006C-O-SP	10	9202S	13	9303S-HM3C-SP	30	9403S-1000L	42
90-06F110	168	9202S-R	13	9303S-HM4C	28	9403S-1000S	42
9006P-O	11	9203C	14	9303S-HM4C-SP	30	9403S-540	42
9008C-O	9	9203C-R	14	9303S-HM5C	28	9403S-540Q	42
90-08F110	168	9203C-R-SP	15	9303S-HM5C-SP	30	9403S-540S	42
9008P-O	11	9203C-SP	15	9305C-HM3C	34	94-389-00	92
90-10F110	168	9203P-S	20	9305C-HM3C-BSP	35	94-389-01	92
90-15F110	168	9203S	14	9305C-HM3C-SP	35	94-712-00	99
9016C-O	9	9203S-R	14	9306C-HM1C	36	94-716-00	99
9016C-O-SP	10	9203S-SP	15	9306C-HM1C-3U	37	94-717-00	99
9016P-O	11	9205C	16	9306C-HM3C	36	94-718-00	99
9018C-O	9	9205C-BSP	17	9306C-HM3C-3U	37	94-719-00	99
9018P-O	11	9205C-SP	17	9306C-HM5C	36	94-720-00	99
902-100	93	9206C	18	9306C-HM5C-3U	37	94-720-05	99
902-200	93	9206S	18	9306S-HM1C	36	94-721-00	99
9028C-O	9	9208C	19	9306S-HM1C-3U	37	94-723-00	99
9028C-O-SP	10	9232C-SP	53	9306S-HM3C	36	94-724-00	99
9047C	12	9233C-SP	53	9306S-HM3C-3U	37	94-725-00	99
9047C-BSP	12	9243P-SP	52	9306S-HM5C	36	94-732-00	99
9047C-SP	12	9253P-C	21	9306S-HM5C-3U	37	94-733-00	99
90A2CM02E00	149	9262C-C	23	9307C-GM10	38	94-734-00	99
90A2CM03E00	149	9262C-CR	23	9307C-GM12	38	94-735-00	99
90A2CM04E00	149	9262S-C	23	9307CWS-GM12	39	94-736-00	99
90A2CM05E00	149	9262S-CR	23	9308C-GM25	40	94-737-00	99
90A2CM06E00	149	9263C-C	25	9308C-PM15	40	94-738-00	99
90A2CM07E00	149	9263C-CR	25	9308CX	40	9500P-S	20
90A2CM10E00	149	9263C-CR-SP	24	9325-043-101	93	9513P	22
90A2CM15E00	149	9263C-CR-SP-B	24	9332C-HM1C-SP	54	9553P-C	21
90A2CM20E00	149	9263C-C-SP	24	9332C-HM5C-SP	54	9700B	108
90A2CM30E00	149	9263S-C	25	9342P-HM1C-5SP	55	9700S	108
90B2CM02E00	149	9263S-CR	25	9342P-HM5C-5SP	55	9732C-SPX	54
90B2CM03E00	149	9263S-C-SP	24	9343P-GM10-SP	52	9733C-SPX	54
90B2CM04E00	149	9302C-HM1C	26	9343P-GM10Y-SP	52	9910-BMH50	84
90B2CM05E00	149	9302C-HM2C	26	9343P-GM6-SP	52	9910-D1064	75
90B2CM06E00	149	9302C-HM4C	26	9343P-GM6Y-SP	52	9910-D1064GRGI	75
90B2CM07E00	149	9302CT-GM1	26	9402C-1000	42	9910-D115	70
90B2CM10E00	149	9302S-HM1C	26	9402C-1000L	42	9910-D115GR34	70
90B2CM15E00	149	9302S-HM2C	26	9402C-1000S	42	9910-D1265	76
90B2CM20E00	149	9302S-HM4C	26	9402C-540	42	9910-D135	71
90B2CM30E00	149	9302ST-GM1	26	9402C-540Q	42	9910-D160	71
90FFB12	211	9303C-HM1C	28	9402C-540S	42	9910-D250	72
90FFB14	211	9303C-HM1C-SP	30	9403C-1000	42	9910-D252	72
90FFB18	211	9303C-HM2C	28	9403C-1000L	42	9910-D252GRGI	72
90FFB38	211	9303C-HM2C-SP	30	9403C-1000L-SP	41	9910-D252GRGI58	72
90FFL12	211	9303C-HM3C	28	9403C-1000-MTZ	42	9910-D252GRGIAP	72
90FFL14	211	9303C-HM3C-SP	30	9403C-1000S	42	9910-D30	73
90FFL18	211	9303C-HM4C	28	9403C-1000-SP	41	9910-D30AP-A	73
90FFL38	211	9303C-HM4C-SP	30	9403C-540	42	9910-D30-B-GRGI	73
90FMB12	211	9303C-HM5C	28	9403C-540Q	42	9910-D30GRGI	73
90FMB14	211	9303C-HM5C-SP	30	9403C-540Q-SP	41	9910-D403	73
90FMB38	211	9303P-HM1C	32	9403C-540S	42	9910-D403GRGI	73
90FML12	211	9303P-HM2C	32	9403C-540-SP	41	9910-D50	74
90FML14	211	9303P-HM3C	32	9403C-540S-SP	41	9910-D503	74
90FML38	211	9303P-HM4C	32	9403P-1000	42	9910-D503GRGI	74
90-HBF	211	9303P-HM5C	32	9403P-1000L	42	9910-D503GRGI34	74
90LD03F110	169	9303S-HM1C	28	9403P-1000S	42	9910-D50AP-A	74
90LD04F110	169	9303S-HM1C-SP	30	9403P-540	42	9910-D50-B	74
90LD05F110	169	9303S-HM2C	28	9403P-540Q	42	9910-D70	70

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
9910-D70GR	70	9910-KIT2024	81	9950-075NA	216	9950-300BA	216
9910-D813	75	9910-KIT2026	81	9950-075NB	216	9950-300BB	216
9910-D813GRGI	75	9910-KIT2053	81	9950-075ND	217	9950-300BD	217
9910-DBA110	76	9910-KIT2100	81	9950-075NF	217	9950-300BF	217
9910-DBA140	77	9910-KIT2110	81	9950-08050	196	9950-300C	216
9910-DBA160	77	9910-KIT2111	81	9950-08120	196	9950-300E	217
9910-DBA200	78	9910-KIT2113	81	9950-08240	196	9950-300G	217
9910-DBS110	76	9910-KIT2114	81	9950-100BA	216	9950-300H	217
9910-DBS140	77	9910-KIT2200	81	9950-100BB	216	9950-300NA	216
9910-DBS160	77	9910-KIT2201	81	9950-100BD	217	9950-300NB	216
9910-DBS200	78	9910-KIT2202	81	9950-100BF	217	9950-300ND	217
9910-DP423	69	9910-KIT2203	81	9950-100C	216	9950-300NF	217
9910-DP423GRGI	69	9910-KIT2204	81	9950-100E	217	9951-2050B	210
9910-DP573	69	9910-KIT2347	81	9950-100G	217	9951-2050N	210
9910-DP573GRGI	69	9910-KIT2349	81	9950-100H	217	9951-2075B	210
9910-DP763	69	9910-KIT2364	81	9950-100NA	216	9951-2075N	210
9910-DP763GRGI	69	9910-KIT2365	81	9950-100NB	216	9951-2100B	210
9910-GH50	84	9910-KIT2370	81	9950-100ND	217	9951-2100N	210
9910-GR40	83	9910-KIT2374	81	9950-100NF	217	9951-2100UF	215
9910-GS25	69, 83	9910-KIT2376	81	9950-12060	196	9951-2125B	210
9910-GS35S	69, 83	9910-KIT2378	81	9950-12240	196	9951-2125N	210
9910-GS40GI	83	9910-KIT2388	81	9950-125BA	216	9951-2150B	210
9910-GS50GI	84	9910-KIT2389	81	9950-125BB	216	9951-2150N	210
9910-HYD1570	82	9910-KIT2408	81	9950-125BD	217	9951-2200B	210
9910-HYD2495	82	9910-KIT2409	81	9950-125BF	217	9951-2200N	210
9910-HYD5312	82	9910-KIT2423	81	9950-125C	216	9951-2200UF	215
9910-KIT1640	82	9910-KIT2444	81	9950-125E	217	9951-2300UF	215
9910-KIT1642	82	9910-KIT2445	81	9950-125G	217	9951-3050B	210
9910-KIT1702	81	9910-KIT2446	81	9950-125H	217	9951-3050N	210
9910-KIT1703	81	9910-KIT2456	81	9950-125NA	216	9951-3075B	210
9910-KIT1704	81	9910-KIT2457	81	9950-125NB	216	9951-3075N	210
9910-KIT1706	81	9910-KIT2479	81	9950-125ND	217	9951-3100B	210
9910-KIT1707	81	9910-KIT2480	81	9950-125NF	217	9951-3100N	210
9910-KIT1708	81	9910-RM40	83	9950-150BA	216	9951-3125B	210
9910-KIT1710	81	9910-VDR50	84	9950-150BB	216	9951-3125N	210
9910-KIT1711	81	9920-248	203	9950-150BD	217	9951-3150B	210
9910-KIT1720	81	9920-261703-69	202	9950-150BF	217	9951-3150N	210
9910-KIT1721	81	9920-35.1703.67	202	9950-150C	216	9951-3200B	210
9910-KIT1722	81	9920-35.1802.56	202	9950-150E	217	9951-3200N	210
9910-KIT1723	81	9920-KIT10/11	203	9950-150G	217	9A100	223
9910-KIT1724	81	9940-9750NRL	107	9950-150H	217	9A112	223
9910-KIT1725	81	9940-9751NRL	107	9950-150NA	216	9A114	223
9910-KIT1730	81	9940-9753NRL	107	9950-150NB	216	9A12	223
9910-KIT1734	81	9950-0001	140	9950-150ND	217	9A14	223
9910-KIT1881	81	9950-0022	175	9950-150NF	217	9A1412	223
9910-KIT1882	81	9950-0023	175	9950-16180	196	9A1438	223
9910-KIT1904	81	9950-0024	174, 193	9950-16280	196	9A200	223
9910-KIT1908	81	9950-0027	174, 193	9950-16320	196	9A300	223
9910-KIT1916	81	9950-0028	175	9950-200BA	216	9A34	223
9910-KIT1917	81	9950-0030	206	9950-200BB	216	9A38	223
9910-KIT1919	81	9950-0031	175	9950-200BD	217	9A3812	223
9910-KIT1920	81	9950-0033	167	9950-200BF	217	A100	219
9910-KIT1963	81	9950-075BA	216	9950-200C	216	A100114	219
9910-KIT1964	81	9950-075BB	216	9950-200E	217	A10034	219
9910-KIT1965	81	9950-075BD	217	9950-200G	217	A100B	224
9910-KIT1972	81	9950-075BF	217	9950-200H	217	A100S	224
9910-KIT1984	81	9950-075C	216	9950-200NA	216	A-100SS	216
9910-KIT1987	81	9950-075E	217	9950-200NB	216	A112	219
9910-KIT1990	83	9950-075G	217	9950-200ND	217	A112114	219
9910-KIT1992	81	9950-075H	217	9950-200NF	217	A114	219

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
A114100	219	A3812	219	ASG1604	213	B-300SS	216
A114112	219	A3812B	224	ASG400	213	B301AB	213
A11434	219	A3812S	224	ASG4004	213	B33B	225
A12	219	A3814	219	ASG60	213	B34	222
A12100	219	A3814B	224	ASG604	213	B3412	222
A1214	219	A3814S	224	ATR-BLACK	156	B34B	225
A1214B	224	A38516	219	ATR-BLUE	156	B35	222
A1214S	224	A3858	219	ATR-BROWN	156	B35S	224
A12316	219	A38B	224	ATR-GRAY	156	B-750SS	216
A1234	219	A38S	224	ATR-GREEN	156	BC100	193
A1234B	224	A-750SS	216	ATR-LILAC	156	BC100R	193
A1234S	224	AA10034P	224	ATR-ORANGE	156	BC114	193
A1238	219	AA100P	224	ATR-RED	156	BC34R	193
A1238B	224	AA112P	224	ATR-WHITE	156	BG-400275N	193
A1238S	224	AA114P	224	ATR-YELLOW	156	BG-4200-0060	174, 191
A1258	219	AA200P	224	ATW-11001	137	BG-4200-0061	174, 191
A1258B	224	AA34P	224	ATW-110015	137	BG-4200-0062	174, 191
A1258S	224	ADI-11001	138	ATW-11002	137	BG-4200-0063	174, 191
A12B	224	ADI-110015	138	ATW-11003	137	BG-4247N-B111	191
A12S	224	ADI-11002	138	ATW-11004	137	BG-4247N-B119	191
A14	219	ADI-11003	138	ATW-11005	137	BG-4247N-B121	191
A1412	219	ADI-11004	138	AVI-11001	136	BG-4247N-B129	191
A1412B	224	AE2650	205	AVI-110015	136	BG-4247N-C111	191
A1412S	224	AE2651	205	AVI-11002	136	BG-4247N-C119	191
A14316	219	AE2652	205	AVI-110025	136	BG-4247N-C121	191
A1438	219	AE2654	205	AVI-11003	136	BG-4247N-C129	191
A1438B	224	AF12	219	AVI-11004	136	BG-7433-2502	189
A1438S	224	AF1214	219	AVI-11005	136	BG-7433-2503	189
A14516	219	AF1234	219	AVI-11006	136	BG-7433-2601	189
A14B	224	AF1238	219	AVI-11008	136	BG-7433-2608	189
A14S	224	AF1258	219	AVI-11010	136	BG-7433-2610	189
A-150SS	216	AF14	219	AVI-8001	136, 159	BG-7433-2613	189
A1814	219	AF1438	219	AVI-80015	136, 159	BG-7433-3314	189
A1814B	224	AF1438B	224	AVI-8002	136, 159	BG-7433-3316	189
A1814S	224	AF34	219	AVI-80025	136, 159	BG-UFC0100	214
A18316	219	AF3412	219	AVI-8003	136, 159	BG-UFC0150	214
A1838	219	AF3438	219	AVI-8004	136, 159	BG-UFC0200	214
A1838B	224	AF38	219	AVI-OC-80015	165	BG-UFC0300	214
A1838S	224	AF3812	219	AVI-OC-8002	165	C100	222
A18516	219	AF3814	219	AVI-OC-80025	165	C-100SS	216
A200	219	AMT-15007	151	AVI-OC-8003	165	C12	222
A-200SS	216	AMT-15008	151	AVI-OC-8004	165	C12B	225
A-300SS	216	AMT-15010	151, 202	AXI-110015	139	C12NPT	222
A34	219	AMT-15012	151, 202	AXI-11002	139	C12S	224
A34100	219	AMT-15015	151, 202	AXI-110025	139	C14	222
A34100B	224	AMT-15018	151, 202	AXI-11003	139	C-150SS	216
A34100S	224	AMT-15020	151, 202	AXI-11004	139	C-200SS	216
A3412	219	AMT-15023	151, 202	AXI-11005	139	C-300SS	216
A3412B	224	AN0.6	173	AXI-11006	139	C34	222
A3412S	224	AN1.2	173	AXI-80015	139, 159	C34B	225
A3414	219	AN1.8	173	AXI-8002	139, 159	C34S	224
A3438	219	AN2.4	173	AXI-8003	139, 159	C38	222
A3438B	224	APM-BLACK	144	AXI-8004	139, 159	C38B	225
A3438S	224	APM-BLUE	144	AXI-8005	139, 159	C58	222
A3458	219	APM-GRAY	144	AXI-8006	139, 159	C58B	225
A3458B	224	APM-GREEN	144	B100	222	C-750SS	216
A3458S	224	APM-ORANGE	144	B-100SS	216	CA5210C	109
A34B	224	APM-RED	144	B12	192, 222	CA5320C-HRX	109
A34S	224	APM-YELLOW	144	B-150SS	216	CA5321C-H	109
A38	219	ASG160	213	B-200SS	216	CA5324C	109

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
CA6500C	109	CAP05-025	174	DCC-02	154, 162	EL1458	219
CA6500N	109	CAP05-03	174	DCC-03	154, 162	EL14F	219
CA6500XL	109	CAP05-04	174	DCC-04	154, 162	EL14HB	220
CA7560C	109	CAP05-05	174	DCC-05	154, 162	EL1814	219
CA7560N	109	CAP05-06	174	DCC-06	154, 162	EL18316	219
CA7560XL	109	CAP05-08	174	DCC-07	154, 162	EL1838	219
CA9006C-O	109	CAP05-20	154, 156, 157, 158, 162, 174	DP-100SS	217	EL18516	219
CA9006P-O	109			DP-150SS	217	EL200	219
CA9202C	109	CAP09-20	174	DP-200SS	217	EL200HB	220
CA9203P-S	109	CAP10-20	174	DP-300SS	217	EL34	219
CA9303C-HM4C	109	CAP30-20	143, 174	DP-750SS	217	EL34100	219
CA9303P-HM4C	109	CPV007	193	DT0.5	173	EL3412	219
CA9910-D115	109	CRC-13	154	DT0.75	173	EL3412F	219
CA9910-D30	109	CRC-23	154	DT1.0	173	EL3414	219
CA9910-D30GRGI	109	CRC-31	162	DT1.5	173	EL3438	219
CA9910-D70	109	CRC-35	162	E-100SS	217	EL3458	219
CA9910-KIT1640	109	CRC-45	154	E-150SS	217	EL3458F	219
CAP00-01	135, 138, 163, 174	CRC-46	154	E-200SS	217	EL3458HB	220
CAP00-015	127, 135, 138, 163, 174	CRC-56	162	E-300SS	217	EL34F	219
CAP00-02	127, 135, 138, 163, 165, 174	CS301AF0.4-65	171	E34	221, 222	EL34HB	220
CAP00-025	127, 174	CS301AF0.7-80	171	E3412	221, 222	EL38	219
CAP00-03	127, 135, 138, 163, 165, 174	CS301AF1.2-105C	171	E3412B	225	EL3812	219
CAP00-035	174	CS301AF1.6-100	171	E3438	221	EL3812F	219
CAP00-04	127, 135, 138, 163, 165, 174	CS301AFD0.7-80	171	E34B	225	EL3814	219
CAP00-05	127, 135, 163, 174	CS301AFD1.2-105	171	E-750SS	217	EL3814F	219
CAP00-06	127, 135, 163, 174	CS301MNF-W	171	E80-01	163, 172	EL3814HB	220
CAP00-08	127, 135, 163, 174	D-100SS	217	E80-015	163, 172	EL38516	219
CAP00-10	135, 174	D-150SS	217	E80-02	163, 172	EL3858	219
CAP00-15	135, 174	D-200SS	217	E80-03	163, 172	EL38F	219
CAP00-20	135, 164, 174	D252GRGI-25	78	E80-04	163	EL38HB	220
CAP01-01	137, 159, 174	D252GRGI-55	78	E80-05	163	EL58HB	220
CAP01-015	137, 159, 165, 174	D-300SS	217	E80-06	163	ELD34	221
CAP01-02	137, 159, 165, 174	D30GRGI-65	79	E80-08	163	ELD3412	221
CAP01-025	159, 165, 174	D30HRGI	79	EL100	219	ELD3414	221
CAP01-03	137, 159, 165, 174	D30HRGI-65	79	EL10012	219	ELD3438	221
CAP01-04	137, 159, 165, 174	D30HRGI-65E	79	EL10034	219	ELD3458	221
CAP01-05	137, 174	D34	221	EL100HB	220	ESI-110015	147
CAP01-06	174	D34100	221	EL112	219	ESI-11002	147
CAP01-08	174	D3412	221	EL112HB	220	ESI-110025	147
CAP01-10	174	D3412B	225	EL114	219	ESI-11003	147
CAP01-15	174	D3414	221	EL114100	219	ESI-11004	147
CAP01-20	174	D3438	221	EL114112	219	ESI-11005	147
CAP04-01	174	D3438B	225	EL11434	219	ESI-11006	147
CAP04-015	174	D3458	221	EL114HB	220	F100	220
CAP04-02	161, 174	D3458B	225	EL12	219	F-100SS	217
CAP04-025	174	D34B	225	EL12100	219	F110-01	135
CAP04-03	161, 174	D403GRGI-65	79	EL1214	219	F110-015	135
CAP04-04	161, 174	D403HRGI	79	EL1214HB	220	F110-02	135
CAP04-05	161, 174	D403HRGI-65	79	EL1234	219	F110-03	135
CAP04-06	161, 174	D403HRGI-65E	79	EL1234F	219	F110-04	135
CAP04-08	174	D503HRGI	80	EL1238	219	F110-05	135
CAP04-10	174	D503HRGI-65	80	EL1238HB	220	F110-06	135
CAP04-15	174	D503HRGI-65E	80	EL1258	219	F110-08	135
CAP04-20	144, 155, 174	D-750SS	217	EL1258F	219	F110-10	135
CAP05-01	174	DC-100SS	217	EL12HB	220	F110-15	135
CAP05-015	174	DC-150SS	217	EL14	219	F110-20	135
CAP05-02	174	DC-200SS	217	EL1412	219	F112	220
		DC-300SS	217	EL1438	219	F114	220
		DC-750SS	217	EL1438F	219	F12	220
		DCC-01	154, 162	EL14516	219	F12B	225

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
F14	220	FC-DB120-06	119	FC-VP110-06	129	GAT110-025A	121
F14B	225	FC-ESI-110015	147	FC-VP110-08	129	GAT110-02A	121
F-150SS	217	FC-ESI-110015P	147	FC-VP110-10	129	GAT110-03	121
F18	220	FC-ESI-11002	147	FC-VP110-15	129	GAT110-035	121
F200	220	FC-ESI-110025	147	FC-VP80-015	129	GAT110-035A	121
F-200SS	217	FC-ESI-11002P	147	FC-VP80-02	129	GAT110-03A	121
F-300SS	217	FC-ESI-11003	147	FC-VP80-03	129	GAT110-04	121
F34	220	FC-ESI-11003P	147	FC-VP80-04	129	GAT110-04A	121
F38	220	FC-ESI-11004	147	FC-VP80-05	129	GAT110-05	121
F38B	225	FC-ESI-11004P	147	FC-VP80-06	129	GAT110-05A	121
F65-005	170	FC-ESI-11005	147	FC-XT010	167	GAT110-06	121
F-750SS	217	FC-ESI-11005P	147	FC-XT020	167	GAT110-06A	121
F80-0067	135, 170	FC-ESI-11006	147	FC-XT024	167	GAT110-08	121
F80-01	135	FC-ESI-11006P	147	FC-XT043	167	GAT110-08A	121
F80-015	135	FC-ESI-11008	147	FM-1100	98	GG100	212
F80-02	135	FC-ESI-11010	147	FM-1100i	98	GG1000	212
F80-03	135	FC-ESI-11015	147	FNAE-100100	216	GG10000	212
F80-04	135	FC-ESI-11020P	147	FNAE-10034	216	GG1004	212
F80-05	135	FC-GA110-015	123	FNAE-112100	216	GG1500	212
F80-06	135	FC-GA110-02	123	FNAE-112112	216	GG15000	212
F80-08	135	FC-GA110-025	123	FNAE-112114	216	GG160	212
F80-10	135	FC-GA110-03	123	FNAE-114100	216	GG200	212
F80-15	135	FC-GA110-035	123	FNAE-114114	216	GG2000	212
F80-20	135	FC-GA110-04	123	FNAE-200200	216	GG30	212
FC100	220	FC-GA110-05	123	FNAE-3412	216	GG300	212
FC112	220	FC-TR110-01	133	FNAE-3434	216	GG3000	212
FC114	220	FC-TR110-015	133	FNAE-3458	216	GG400	212
FC12	220	FC-TR110-02	133	FNAS-100100	216	GG4000	212
FC12B	225	FC-TR110-03	133	FNAS-10012	216	GG5000	212
FC14B	225	FC-TR110-04	133	FNAS-10034	216	GG60	212
FC200	220	FC-TR110-05	133	FNAS-112100	216	GG600	212
FC34	220	FC-TR110-06	133	FNAS-112112	216	GG6000	212
FC-AVI-11001	136	FC-TR110-08	133	FNAS-112114	216	GG604	212
FC-AVI-110015	136	FC-TR110-10	133	FNAS-114100	216	GRD120-01	125
FC-AVI-11002	136	FC-TR110-15	133	FNAS-114114	216	GRD120-015	125
FC-AVI-110025	136	FC-TR80-01	133	FNAS-1212	216	GRD120-02	125
FC-AVI-11003	136	FC-TR80-015	133	FNAS-200200	216	GRD120-025	125
FC-AVI-11004	136	FC-TR80-02	133	FNAS-3412	216	GRD120-03	125
FC-AVI-11005	136	FC-TR80-03	133	FNAS-3434	216	GRD120-04	125
FC-AVI-11006	136	FC-TR80-04	133	FNAS-3458	216	GRD120-05	125
FC-AVI-11008	136	FC-TR80-05	133	FNAP-100	216	GRD120-06	125
FC-AVI-11010	136	FC-TR80-06	133	FNAP-100N	106	GRD120-08	125
FC-AXI-110015	139	FC-TR80-08	133	FNE-100100	106	GTT1214	220
FC-AXI-11002	139	FC-TR80-10	133	FNE-10034	106	GTT3414	220
FC-AXI-11003	139	FC-TR80-15	133	FNS-100100	106	H34	221
FC-AXI-11004	139	FC-ULD120-015	117	FNS-10012	106	HCA-01	157
FC-AXI-11005	139	FC-ULD120-02	117	FNS-10034	106	HCA-015	157
FC-AXI-11006	139	FC-ULD120-025	117	G34	221	HCA-02	157
FC-AXI-80015	139, 159	FC-ULD120-03	117	G3412	221	HCA-025	157
FC-AXI-8002	139, 159	FC-ULD120-04	117	G3414	221	HCA-03	157
FC-AXI-8003	139, 159	FC-ULD120-05	117	G40004	197	HCA-045	157
FC-AXI-8004	139, 159	FC-ULD120-06	117	GA110-015	123	HF140-08	141
FC-AXI-8005	139, 159	FC-ULD120-08	117	GA110-02	123	HF140-10	141
FC-AXI-8006	139, 159	FC-VP110-015	129	GA110-025	123	HF140-15	141
FC-DB120-015	119	FC-VP110-02	129	GA110-03	123	HF140-20	141
FC-DB120-02	119	FC-VP110-025	129	GA110-035	123	HF140-30	141
FC-DB120-025	119	FC-VP110-03	129	GA110-04	123	HF140-40	141
FC-DB120-03	119	FC-VP110-035	129	GA110-05	123	HF140-50	141
FC-DB120-04	119	FC-VP110-04	129	GAT110-02	121	HF140-60	141
FC-DB120-05	119	FC-VP110-05	129	GAT110-025	121	HM1214	221

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
HM1238	221	NB1614	192	RB212200	220	SG3002	212
HM14	221	NBC10	192	RB300200	220	SG3002C	212
HM14316	221	NC12	222	RB3412	220	SG302	212
HM18	221	NC1214	222	RB3412B	225	SG400	212
HM3814	221	NC12N	222	RB3414	220	SG5000	212
HM516	221	NC14	222	RB3418	220	SG60	212
HM58	221	NC14N	222	RB3438	220	SG600	212
HM5838	221	NC38	222	RB3814	220	SG601.58C	212
I34	222	NC38N	222	RB3818	220	SG602	212
J3412	221	NF1614	192	RI167	211	SG602C	212
K8412	192	NS12	226	RW1116A	222	SG604	212
K8414	192	NS17	226	RW1116B	222	SHM100	221
K8438	192	NS21	226	RW1116C	222	SHM112	221
LA24	210	NS28	226	RW1116D	222	SHM114	221
LA5	210	NS32	226	SA12B	225	SHM12	221
LD110-015	127	NS4	226	SA38B	225	SHM1238	221
LD110-02	127	NS7	226	SE100	219	SHM1258	221
LD110-025	127	NS8	226	SE112	219	SHM12B	224
LD110-03	127	NTL12	192	SE114	219	SHM14	221
LD110-04	127	NTL14	192	SE12	219	SHM14B	224
LD110-05	127	NTL34	192	SE12B	224	SHM200	221
LD110-06	127	NTL38	192	SE14	219	SHM34	221
LD110-08	127	NTL58	192	SE1445	220	SHM34B	224
LD80-015	127	NTT12	192	SE14B	224	SHM38	221
LD80-02	127	NTT34	192	SE200	219	SHM38B	224
LD80-03	127	NTT38	192	SE34	219	SHM58	221
LD80-04	127	NTT58	192	SE3445	220	SHM58B	224
LD80-05	127	OCI-8002	165	SE38	219	SLV10-AA40	94
LD80-06	127	OCI-8003	165	SE38B	224	SLV10-AA41	94
LD80-08	127	OCI-8004	165	SF-1100	98	SLV10-AA48	94
LL100	220	PC1/2F-235120	197	SF-1100-110V	98	SLV10-AB41	94
LL112	220	PC1/2F-36075	197	SF-1100-PTS	97	SLV10-HA01	94
LL114	220	PC1/2F-36075-PV	197	SF-1100-PTSi	97	T100	221
LL12	220	PP301AF0.4-65	171	SF-1100-PTSi-00	97	T112	221
LL14B	225	PP301AF0.7-80	171	SF-1100-REC-DT	97	T114	221
LL18B	225	PP301AF0.7-80W	171	SF-1105	98	T12	221
LL200	220	PP301AF1.2-105C	171	SF-1105-PTS	97	T1234T	221
LL34	220	PP301AF1.6-100	171	SF-1105-PTSi	97	T1238	221
LT2	226	PS3/4F-PN	190	SF-1105-REC	97	T1238T	221
LT4	226	PV1/2F1/2M-MA	197	SG100	212	T1258T	221
M100	220	Q12	222	SG1000	212	T12C	192
M112	220	Q14	222	SG1001.58C	212	T12T	221
M114	220	QT14-1-NDC	188	SG1002	212	T14	221
M12	220	RB10012	220	SG1002C	212	T1412T	221
M1214	220	RB10034	220	SG1004	212	T1438	221
M1218	220	RB112100	220	SG15	212	T1438T	221
M1238	220	RB112114	220	SG152	212	T14T	221
M14	220	RB11234	220	SG160	212	T18	221
M1418	220	RB114100	220	SG1601.58C	212	T1814T	221
M18	220	RB11434	220	SG1602	212	T200	221
M200	220	RB1214	220	SG1602C	212	T34	221
M34	220	RB1214B	225	SG200	212	T34100T	221
M3412	220	RB1218	220	SG2000	212	T3412	221
M3438	220	RB1238	220	SG2001.58C	212	T3412T	221
M38	220	RB1238B	225	SG2002	212	T34C	192
M3814	220	RB1418B	225	SG2002C	212	T34F	221
M3818	220	RB200100	220	SG2004	212	T34T	221
MF1814B	213	RB200112	220	SG30	212	T38	221
N34	222	RB200114	220	SG300	212	T3812	221
NB1612	192	RB20034	220	SG3000	212	T3812T	96, 221

Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
T3814T	221	TS02-50	121, 125, 175	UFG0100E	189, 214	WBH34	197
T3858	221	TS03-25	175	UFG0150E	214	WBH400	197
T38C	192	TT100	220	UFG0200E	214	WGG1000C	212
T38T	221	TT112	220	UFG0300E	214	WGG100C	212
T58	221	TT114	220	ULD120-015	117	WGG1500C	212
TL06-0003	194	TT12	220	ULD120-02	117	WGG160C	212
TL06-0004	194	TT14	220	ULD120-025	117	WGG2000C	212
TL08-0001	195	TT200	220	ULD120-03	117	WGG200C	212
TL08-0002	195	TT34	220	ULD120-04	117	WGG3000C	212
TL08-0003	195	TVI-80005	158	ULD120-05	117	WGG300C	212
TL08-0011	195	TVI-800075	158	ULD120-06	117	WGG400C	212
TL08-0012	195	TVI-80015	158	ULD120-08	117	WGG5000C	212
TL08-0013	195	TVI-8002	158	VGG30	212	WGG6000C	212
TL08-0014	195	TVI-80025	158	VGG30160	212	WGG600C	212
TL12-0001	195	TVI-8003	158	VGG3030	212	WGG60C	212
TL12-0002	195	UF100	214	VGG3060	212	WGGSS100	213
TL12-0003	195	UF100-FN025P	215	VGG30604	212	WGGSS1000	213
TL12-0006	196	UF100-FN100	215	VP110-015	129	WGGSS100C	213
TL12-0007	196	UF100-HB075	215	VP110-02	129	WGGSS160	213
TL12-0011	195	UF100-HB100	215	VP110-025	129	WGGSS3000	213
TL12-0012	195	UF100-HB125	215	VP110-03	129	WGGSS400	213
TL12-0013	195	UF100L	214	VP110-035	129	WGGSS400C	213
TL12-0014	195	UF100L-HB075	215	VP110-04	129	WGGSS5000	213
TL16-0001	195	UF100L-HB100	215	VP110-05	129	WGGSS60	213
TL16-0002	195	UF100L-HB125	215	VP110-06	129	WGGSS600	213
TL16-0003	195	UF100-MN075	215	VP110-08	129	XT010	167
TL16-0006	196	UF100-MN100	215	VP110-10	129	XT010-GIOKIT	167
TL16-0007	196	UF100-MN125	215	VP110-15	129	XT020	167
TL16-0011	195	UF100P	215	VP80-015	129	XT020-GIOKIT	167
TL16-0012	195	UF100T	215	VP80-02	129	XT024	167
TL16-0013	195	UF100X	214	VP80-03	129	XT024-GIOKIT	167
TL16-0014	195	UF200	214	VP80-04	129	XT043	167
TLP-0007	196	UF200-FN200	215	VP80-05	129	XT043-GIOKIT	167
TLP-0018	196	UF200-HB150	215	VP80-06	129	XT080	167
TLP-0023	196	UF200-HB200	215	VPT110-02	131	XT080-GIOKIT	167
TLP-0046	195	UF200L	214	VPT110-025	131	XT167	167
TLP-0050	195	UF200L-HB150	215	VPT110-03	131	XT167-GIOKIT	167
TR110-01	133	UF200L-HB200	215	VPT110-035	131	XT215	167
TR110-015	133	UF200-MA200	215	VPT110-04	131	XT215-GIOKIT	167
TR110-02	133	UF200-MN200	215	VPT110-05	131		
TR110-03	133	UF200P	215	VPT110-06	131		
TR110-04	133	UF200-RC100	215	VPT80-02	131		
TR110-05	133	UF200T	215	VPT80-03	131		
TR110-06	133	UF200X	214	VPT80-04	131		
TR110-08	133	UF300	214	VPT80-05	131		
TR110-10	133	UF300-HB200	215	VPT80-06	131		
TR110-15	133	UF300-HB300	215	VPTCAP	131, 175		
TR80-01	133	UF300L	214	W160M	222		
TR80-015	133	UF300L-HB200	215	W405P	222		
TR80-02	133	UF300L-HB300	215	W406V	222		
TR80-03	133	UF300-MA300	215	WBH100	197		
TR80-04	133	UF300-MN300	215	WBH100GAS	197		
TR80-05	133	UF300P	215	WBH112	197		
TR80-06	133	UF300-RC200	215	WBH114	197		
TR80-08	133	UF300T	215	WBH114/112GAS	197		
TR80-10	133	UF300X	214	WBH12	197		
TR80-15	133	UFC0100	214	WBH12/34GAS	197		
TS01-100	117, 175	UFC0150	214	WBH200	197		
TS01-50	117, 175	UFC0200	214	WBH200GAS	197		
TS02-100	125, 175	UFC0300	214	WBH300	197		

Limited Warranty on HYPRO/SHURFLO Agricultural Pumps & Accessories

Hypro/SHURflo (hereafter, "Hypro") agricultural products are warranted to be free of defects in material and workmanship under normal use for the time periods listed below, with proof of purchase.

- Pumps: one (1) year from the date of manufacture, or one (1) year of use. This limited warranty will not exceed two (2) years, in any event.
- Accessories: ninety (90) days of use.

This limited warranty will not apply to products that were improperly installed, misapplied, damaged, altered, or incompatible with fluids or components not manufactured by Hypro. All warranty considerations are governed by Hypro's written return policy.

Hypro's obligation under this limited warranty policy is limited to the repair or replacement of the product. All returns will be tested per Hypro's factory criteria. Products found not defective (under the terms of this limited warranty) are subject to charges paid by the returnee for the testing and packaging of "tested good" non-warranty returns.

No credit or labor allowances will be given for products returned as defective. Warranty replacement will be shipped on a freight allowed basis. Hypro reserves the right to choose the method of transportation.

This limited warranty is in lieu of all other warranties, expressed or implied, and no other person is authorized to give any other warranty or assume obligation or liability on Hypro's behalf. Hypro shall not be liable for any labor, damage or other expense, nor shall Hypro be liable for any indirect, incidental or consequential damages of any kind incurred by the reason of the use or sale of any defective product. This limited warranty covers agricultural products distributed within the United States of America. Other world market areas should consult with the actual distributor for any deviation from this document.

Return Procedures

All products must be flushed of any chemical (ref. OSHA section 1910.1200 (d) (e) (f) (g) (h)) and hazardous chemicals must be labeled/tagged before being shipped* to Hypro for service or warranty consideration. Hypro reserves the right to request a Material Safety Data Sheet from the returnee for any pump/product it deems necessary. Hypro reserves the right to "disposition as scrap" products returned which contain unknown fluids. Hypro reserves the right to charge the returnee for any and all costs incurred for chemical testing, and proper disposal of components containing unknown fluids. Hypro requests this in order to protect the environment and personnel from the hazards of handling unknown fluids.

Be prepared to give Hypro full details of the problem, including the model number, date of purchase, and from whom you purchased your product. Hypro may request additional information, and may require a sketch to illustrate the problem.

Contact Hypro Service Department at 800-468-3428 to receive a Return Merchandise Authorization number (RMA#). Returns are to be shipped with the RMA number clearly marked on the outside of the package. Hypro shall not be liable for freight damage incurred during shipping. Please package all returns carefully. All products returned for warranty work should be sent shipping charges prepaid to:

HYPRO / PENTAIR
Attention: Service Department
375 Fifth Avenue NW
New Brighton, MN 55112

HYPRO EU Ltd.
Station Road
Longstanton
Cambridge CB24 3DS UK

For technical or application assistance, call the Hypro Technical/Application number: 800-445-8360, or send an email to: technical@hypropumps.com. To obtain service or warranty assistance, call the Hypro Service and Warranty number: 800-468-3428 or +44 1954 260097 (EU); or send a fax to the Hypro Service and Warranty FAX: 651-766-6618 or +44 1954 260245 (EU).

*Carriers, including U.S.P.S., airlines, UPS, ground freight, etc., require specific identification of any hazardous material being shipped. Failure to do so may result in a substantial fine and/or prison term. Check with your shipping company for specific instructions.



Hypro LLC, 375 Fifth Avenue NW, New Brighton, MN 55112, USA
Tel: 651-766-6300 Fax: 651-766-6600 E-mail: hypro.sales@pentair.com Online: www.hypropumps.com

Technical: 800-455-8360 Order Department: 800-42-HYPRO (800-424-9776) FAX for fast delivery: 800-323-6496

Hypro EU LTD., Station Road, Longstanton, Cambridge CB24 3DS, UK
Tel: +44 1954 260097 Fax: +44 1954 260245
E-mail: euaginfo@pentair.com Order E-mail: euagorders@pentair.com Online: www.hypro-eu.com